TRUE TEMPER

HOME AND AGRICULTURAL TOOLS

CATALOG S-5758

YOU CAN LOOK TO

FOR LEADERSHIP

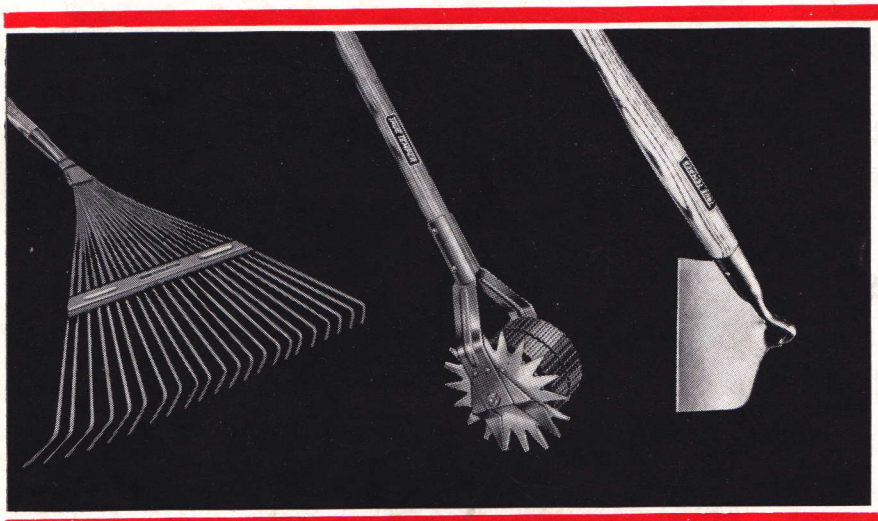

Garden, Lawn & Farm Tools
Pages 2 through 28

Tool Sets and Holders ---------- 2-3
Small Hand Tools ---------- 4-5
Rakes ---------- 6-9
Edgers, Scrapers & Cultivators --- 10-11
Hoes—(Garden-Southern) -------- 11-18
Hooks, Drags & Forks ---------- 18-23
Heavy Steel Goods ---------- 24-25
Garden Shovels and Spades ----- 26-27
Post Hole Tools ---------- 28

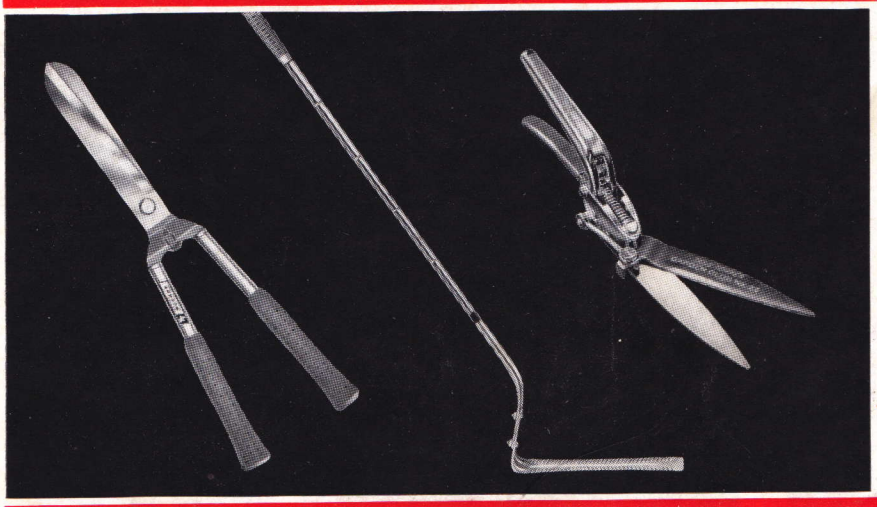

Shears, Grass & Weed Tools
Pages 29 through 37

Shear Display Stand ---------- 29
Grass Shears and Pruners ---------- 31
Hedge Shears ---------- 32
Lopping Shears ---------- 33
Tree Pruners and Bush Hooks ------- 34
Bank Blades and Scythes ---------- 35
Grass and Weed Cutters ---------- 36
Grass Hooks ---------- 37

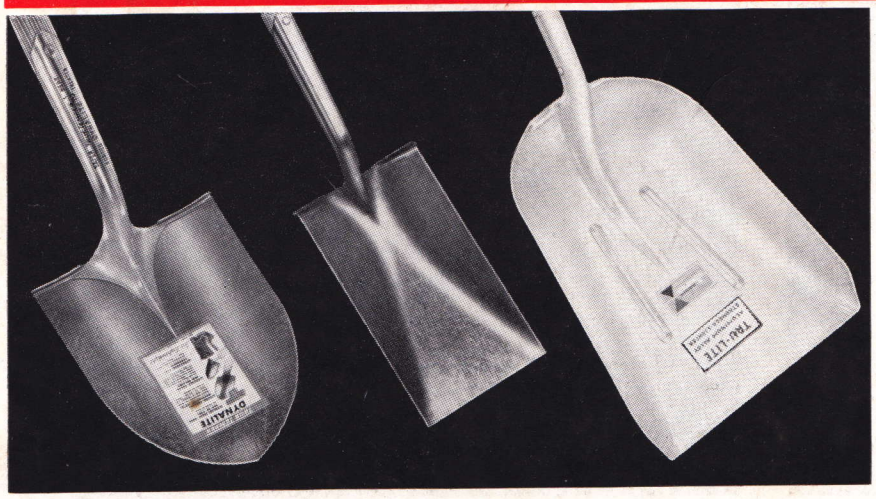

Shovels, Spades & Scoops
Pages 38 through 51

Dynalite Shovels and Spades ------- 39
Bantam Shovels & Spades ------- 40-41
Fox and Bulldog Shovels & Spades 42-43
Hollow Back Shovels & Spades --- 44-46
Hollow Back Scoops ---------- 47-51

TRUE TEMPER Tool Tree

EXCITING NEW SET INCLUDES 10 INTERCHANGEABLE FLORAL TOOLS

TOOL TREE saves steps — keeps tools in one place on holder which sticks in ground, goes where user goes, stores safely on any hook.



HEADS ATTACH to either handle in seconds. Fool-proof lock holds them in place. Simple push button releases head instantly.

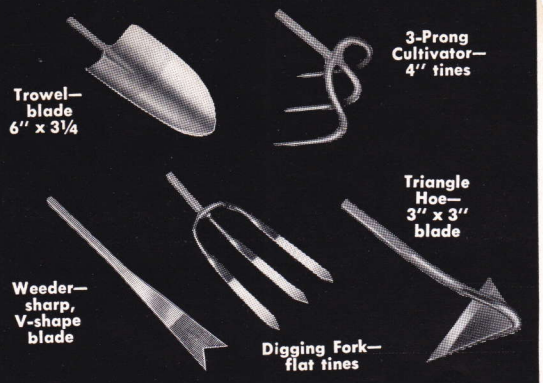

A unique and practical set with long handle and short handle interchangeable with five floral tool heads pictured above. An ideal gift for gardeners and equally suitable for a Spring tool promotion.

Steel heads are taper forged for strength and light weight. Chrome plated handles have same craftsmanship as famous True Temper golf shafts.

No. TT10 — Packed individually in new carton which converts quickly to colorful floor display. Weight each, 5 lbs.

TRUE TEMPER Little Giant

3-PIECE SET OF JUNIOR-SIZE GARDEN TOOLS IN NEW CARTON

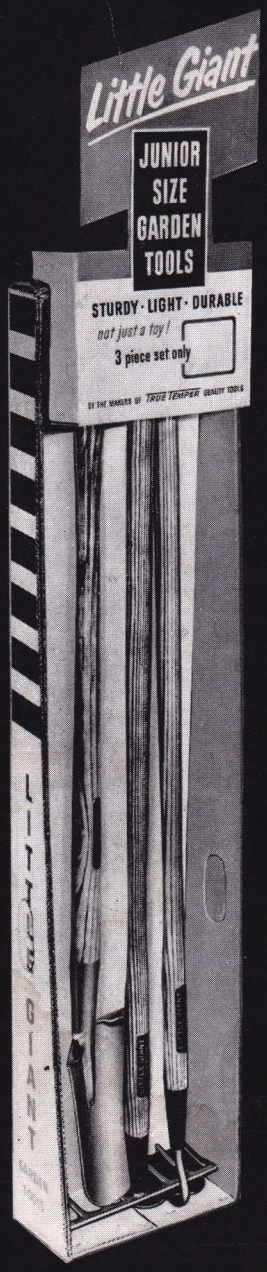

GREEN AND YELLOW shipping carton makes excellent display with lid on or off. Tapered to stand on end by itself. Inside support slides up, locks in place to flag customer's attention.



HAND SLOT at balance point of carton lets customers carry tools home easily.

These small-size tools are a wonderful gift for children, and they're ideal for either a Spring tool promotion or a toy promotion. These are real tools — even Mom and Dad use them for light work.

Plenty of eye appeal, too. Copper bronze head finish, maroon ferrules, and fire-hardened splinter-free handles.

Tools are shipped, displayed, and carried home in new carton shown above.

No. 3JT — Packed in individual carton. Weight each, 4 lbs.

TRUE TEMPER Tool Sets and Holders



TOOL TREE

TRUE TEMPER

A new idea in garden tools — 5 tool heads plus two handles making a complete set of 10 basic tools — all that are needed to make flower gardening easier, more fun. The 5 tool heads are taper-forged steel, heat treated and tempered for strength. Polished and trimmed in rust-resisting aluminum lacquer.

The heads are:

Trowel—6" x 3¼" blade
3-Prong Cultivator—4" long tines
Digger-Weeder—V-shape blade
Digging Fork—3 flat tines
Triangle Hoe—keen edge 3" x 3" blade

Long handle is a step-down golf shaft, chrome plated, 38" long with molded red rubber golf grip. Short handle is 9½" long, black molded rubber grip with bright red cap.

Tool heads attach to either handle in seconds. Fool-proof lock holds the heads in place. Simple push button releases head instantly.

Handy tool keeper "tree" holds heads and handles securely—tools can't shake loose, yet insert and remove easily. Carries tools to job, stands upright in ground to keep tools handy. Hangs compactly in garage or tool shed. Holder finished in rich antique black to contrast with bright tools and chrome-plated handles.

Packed individually in attractive display carton.

No. TT10 Weight per set 5 lbs.

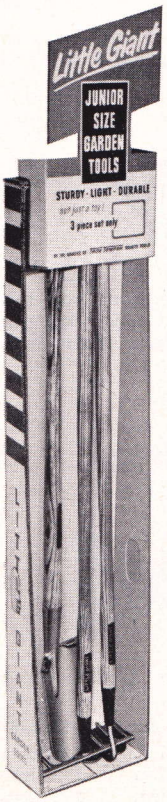

3-PIECE JUNIOR SIZE GARDEN TOOL SET

TRUE TEMPER

Basic tools for youngsters but can also be used by adults where access is limited or for light work. Will fit a gift or toy promotion as well as being a perfect addition to the garden tool department.

Lightweight and sturdy — heads built from high grade steel finished with rich copper bronze. Crystalite maroon ferrules. Handles are good quality ash with famous fire hardened finish, for longer life, better feel and rich appearance.
Set includes:

Shovel—Steel blade 6" x 8¼" with turned steps. 36" overall.
Rake —7½" head and 8 tines forged in one piece. 37" overall.
Hoe —Shank pattern. Steel blade 4½" x 3". 39" overall.

Eye-catching carton in green and yellow, tapered to stand on end without any additional support. Sales features on inside and outside of carton. Slotted handle on side for balanced carrying. Packed individually in carton.

No. 3JT Weight per set 4 lbs.

5-PIECE FLORAL TOOL SET

TRUE TEMPER

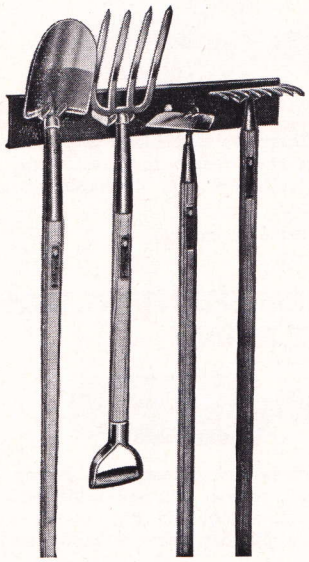

4 FLORAL TOOLS WITH WALL HOLDER

Pre-packed set includes 4 small-size floral tools, plus free compact size tool holder. Tools are:

Floral Hoe—No. LY5. Forged steel, lightweight, blade size 5" x 3¾". Shank pattern, fire hardened handle 4 ft. long.

Floral Rake—No. TR8. Width 7⅝" for easy working among flowers. Forged steel head, teeth, and shank. Fire hardened handle 4 ft. long.

Floral Spading Fork—No. B4D. Four 8½" diamond back tines, width 7½". Long tubular maroon ferrule. Steel D handle top.

D Top (No. FSD) or long handle (No. FS3½) Floral Shovel. Forged steel blade 5⅞" x 8" with turned steps for easier digging.

Steel tool holder, 4" x 25", at no extra charge.

Set can be broken and tools and holder sold separately if desired. Set is shipped in sturdy display carton.

No. 4PF—with long handle Shovel. Weight per set 9 lbs.
No. 4PFD—with D-handle Shovel. Weight per set 9 lbs.

3-Piece Set Without Tool Holder

No. 3PF—Hoe, Rake and long handle Shovel. Weight per set 7 lbs.
No. 3PFD—Hoe, Rake and D-handle Shovel. Weight per set 7 lbs.

GARDEN TOOL WALL HOLDER

TRUE TEMPER

Every homeowner is a prospect for this convenient wall tool holder. An ideal way to promote the sale of additional garden tools. Use as a basic starter item for the new householder. A safe, systematic and compact method for the storage of garden tools. Avoids injury to children, pets and automobiles.

Holds 9 or more tools securely. Readily attached through prepunched holes to walls or studding in any building. Braced steel plate is 6" wide by 34" long with firmly anchored snap-in tool hooks. Finished in bright red enamel. White lettering serves as reminder for basic sharpening and cleaning care. Each tool holder is individually paper wrapped. Packed 6 in carton.

No. GTH Weight each 2 lbs.

TRUE TEMPER Hand Tools — Finest Quality

STAINLESS STEEL TROWEL
TRUE TEMPER



English Gardeners design. Sharp pointed blade 5½" long, 3¼" wide. Heavy gauge stainless steel resists rust, soil acids, strong fertilizers. Shaped handles of select ash, fire-hardened smooth finish. Correct overall balance.

No. TS—Wt. doz. 6 lbs. Packed 6 in carton

STAINLESS STEEL TRANSPLANTING TROWEL
TRUE TEMPER



Built to specifications of professional nurserymen. Heavy gauge stainless steel blade, 2¼" x 5", resists rust, soil acids, strong fertilizers. Semi-flat rounded point. Straight lift for easier transplanting and digging. Ash handle, fire-hardened to resist wear and weather.

No. TTS—Wt. doz. 4 lbs. Packed 6 in carton

STAINLESS STEEL CULTIVATOR
TRUE TEMPER

Three sturdy prongs with sharp pointed tips are curved and angled for maximum "scratch" action. Heavy gauge stainless steel resists rust, soil acids, strong fertilizers. Eight-inch handle, shaped to fit hand comfortably, has smooth fire-hardened finish which resists wear and weather.

No. WS—Wt. doz. 3 lbs. Packed 6 in carton

FORGED STEEL TROWEL
TRUE TEMPER



Drop shank pattern, blade and shank forged in one piece from solid steel. A brute strength tool built for long service. Pointed 6" x 3¼" blade, heat treated and half polished with half copper bronze finish. Smooth fire-hardened handle.

No. DST—Wt. doz. 8 lbs. Packed 6 in carton

FORGED STEEL GEM FORK
TRUE TEMPER



Tines and shank forged in one piece from solid steel, with a copper bronze finish. Flat shaped tines are sharp pointed and have a 3¼" span. Handle is shaped from select ash and has a fire-hardened finish which resists weather and wear.

No. G—Wt. doz. 7 lbs. Packed 6 in carton

FORGED STEEL EUREKA WEEDER
TRUE TEMPER



Three sharp pointed tines and shank are forged from solid steel and heat treated. Copper bronze finish. Width 3½". Smooth fire-hardened handle.

No. E—Wt. doz. 7 lbs. Packed 6 in carton

DANDELION DIGGERS — 2 SIZES
TRUE TEMPER—SHORT HANDLE

Also used as asparagus cutters. Sharp forged steel blades, ½ polished face, V-shaped. Copper bronze finish. Shaped handles of select ash have a smooth fire-hardened finish which resists weather and wear.

No.	Handle	Wt. Doz.	Packed
F88	Short	5 lbs.	12 in carton

TRUE TEMPER—LONG HANDLE

Also used as asparagus cutter. Sharp V-shaped forged blade, ½ polished face, copper bronze finish. Maroon ferrule. Fire-hardened handle.

No.	Overall Length	Wt. Doz.	Packed
DW	41"	13 lbs.	6 in bundle

FORGED STEEL WEEDER HOE
TRUE TEMPER



Triangle shaped blade and shank forged in one piece from solid steel. Blade is 3" wide by 3" deep, with sharp cutting edge. Copper bronze finish. Select ash handle has smooth, fire-hardened finish which resists wear and weather.

No. 3W—Wt. doz. 7 lbs. Packed 6 in carton

FORGED STEEL LETTUCE CUTTERS
TRUE TEMPER



For cutting all headed vegetables. Forged steel blades, copper bronze finish, sharpened. Fire-hardened handles.

No.	Blade	Shank	Wt. Doz.	Packed
3WL	3" x 4" Triangle	Bent	8 lbs.	6 in carton
3WLC	3" x 4" Triangle	Straight	8 lbs.	6 in carton
3L	3¼" x 3¾" Rectangle	Bent	8 lbs.	6 in carton

TRUE TEMPER Hand Tools - Low Priced

REGULAR SIZE GARDEN TROWEL
TRUE TEMPER



Sturdy steel pointed blade is 5⅝" long, 3¼" wide. Bright steel with top half copper bronze finish. Shaped ash handle, 4¾" long, is fire-hardened to resist weather and wear.

No. GC20—Wt. doz. 6 lbs. Packed 6 in carton

TRANSPLANTING SIZE TROWEL
TRUE TEMPER

Sturdy steel blade, 6" long by 2" wide, has round point and proper dish for transplanting work. Bright steel with top half copper bronze finish. Ash handle is comfortably shaped to fit palm and fire-hardened to resist weather and wear.

No. GC21—Wt. doz. 4½ lbs. Packed 6 in carton

3-PRONG HAND CULTIVATOR
TRUE TEMPER



Three steel prongs, properly designed and curved for best scratching action in soil. Width at prongs 3". Copper bronze finish on prongs. Maroon ferrule. Ash handle, 12" long, is fire-hardened to provide smooth, wear and weather-resistant finish.

No. GC22—Wt. doz. 7 lbs. Packed 6 in carton

3-TINE DIGGING FORK
TRUE TEMPER



Flat, pointed tines and shank formed into one piece. Steel head with copper bronze finish. 3¾" wide at tines. Fire-hardened ash handle, 5½" long.

No. GC23—Wt. doz. 6½ lbs. Packed 6 in carton.

3-PRONG WEEDING HOE
TRUE TEMPER

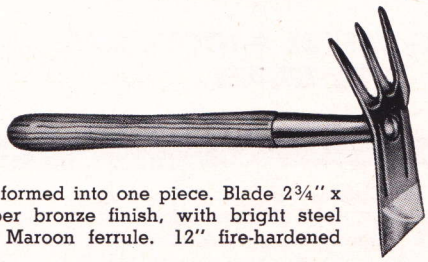

Steel head formed into one piece. Blade 2¾" x 5¾". Copper bronze finish, with bright steel blade tip. Maroon ferrule. 12" fire-hardened handle.

No. GC24—Wt. doz. 7 lbs. Packed 6 in carton

2-PRONG POINTED HOE
TRUE TEMPER

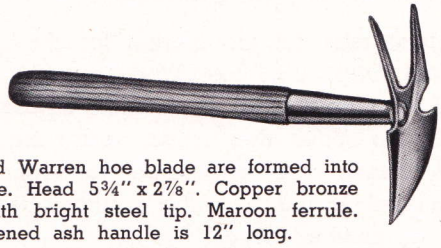

Tines and Warren hoe blade are formed into one piece. Head 5¾" x 2⅞". Copper bronze finish with bright steel tip. Maroon ferrule. Fire-hardened ash handle is 12" long.

No. GC25—Wt. doz. 7 lbs. Packed 6 in carton

4-TOOTH HAND RAKE
TRUE TEMPER



Four steel teeth formed in one piece for strength. Head is 3½" wide, teeth 2¾" long. Copper bronze finish. Maroon ferrule. Handle is 12" long, fire-hardened to resist weather and wear.

No. GC26—Wt. doz. 6 lbs. Packed 6 in carton

24 TOOL ASSORTMENT AND STAND
TRUE TEMPER

Selection of 24 tools, balanced as to item and quantity of each. Tools are built for long use, yet priced for mass market volume. Heads finished in copper bronze, with fire-hardened ash handles. Green and yellow metal stand, a model of simplicity, displays tools prominently in 13" x 14" area. Assembles quickly and easily, and won't mar surface of counter. Selection includes:

6 Trowels	**No. GC20**	2 Hoes	**No. GC24**
4 Trowels	**No. GC21**	2 Hoes	**No. GC25**
4 Cultivators	**No. GC22**	2 Rakes	**No. GC26**
4 Digging Forks	**No. GC23**	1 Display Stand	

No. GCA—24 Tools and Display Stand, Weight Each 15 lbs.

Powerful New Lawn Rake Styled to Sell

CHROME-PLATED SPRING ADDS RIGIDITY
STIFFER FLEXING, HEAVY DUTY
22 TEMPERED TEETH, LARGE CAPACITY

The sturdiest rake on the market for the heaviest litter on the lawn. Built like True Temper's famous No. DL22 'Dynamic' with the added strength of a steel spring to stiffen flex action, and a spring clip which reinforces the one-piece tubular socket. Chrome plated spring and clip contrast beautifully with maroon finished head.

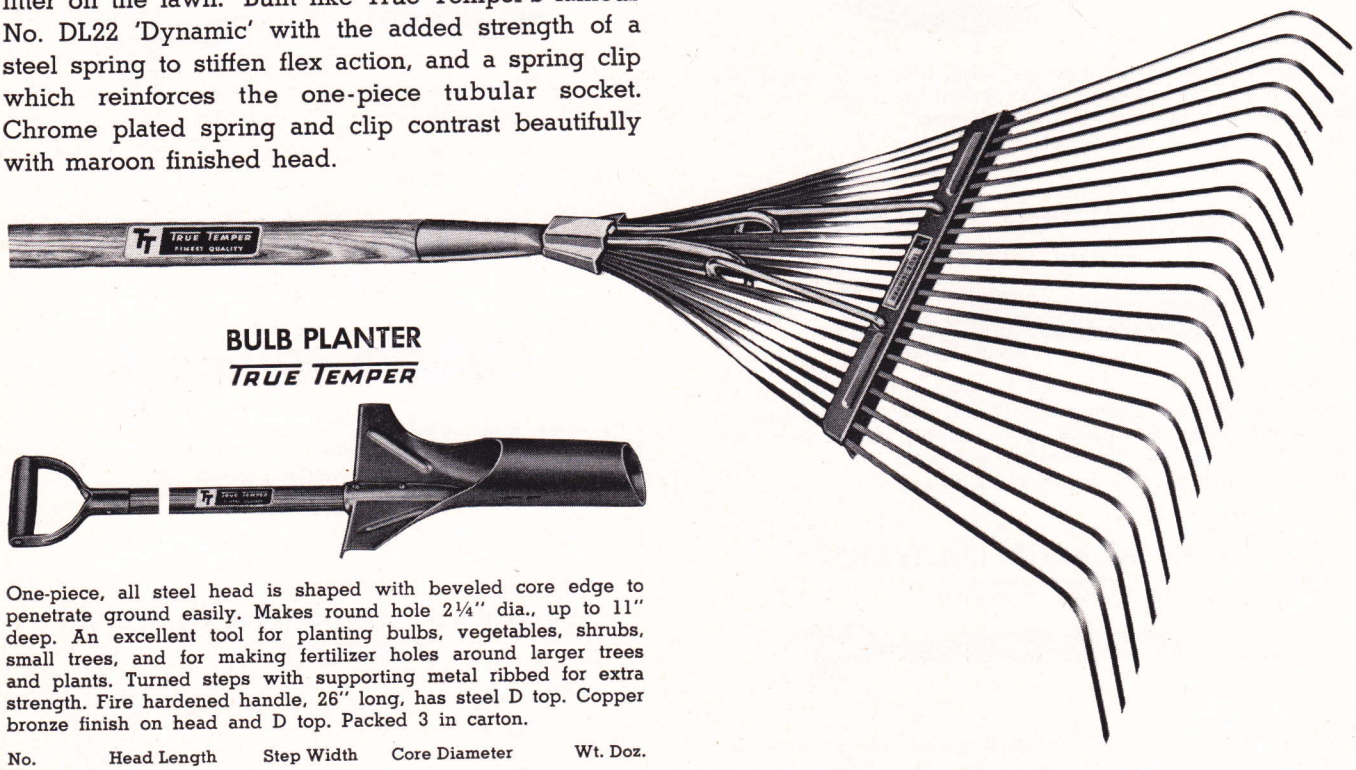

BULB PLANTER
TRUE TEMPER

One-piece, all steel head is shaped with beveled core edge to penetrate ground easily. Makes round hole 2¼" dia., up to 11" deep. An excellent tool for planting bulbs, vegetables, shrubs, small trees, and for making fertilizer holes around larger trees and plants. Turned steps with supporting metal ribbed for extra strength. Fire hardened handle, 26" long, has steel D top. Copper bronze finish on head and D top. Packed 3 in carton.

No.	Head Length	Step Width	Core Diameter	Wt. Doz.
BP	11½"	7½"	2¼"	26 lbs.

LONG HANDLE LIGHTWEIGHT FLORAL TOOLS FOR STAND-UP USE

Four of True Temper's basic, short handle tools are now also available with 36" long fire hardened handles for "stand-up" cultivation.

LONG HANDLE 3-PRONG CULTIVATOR
TRUE TEMPER



Prongs are properly designed and curved for effective scratching action. Width at prongs 3". Ash handle, 36" long, is fire hardened to resist wear and weather. Copper bronze head finish, maroon ferrule.

No. 22L—Wt. doz. 14 lbs. Packed 6 in bundle.

LONG HANDLE 2-PRONG POINTED HOE
TRUE TEMPER

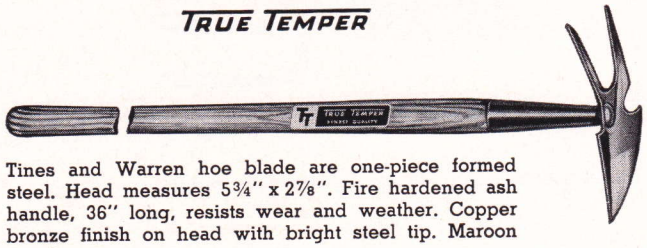

Tines and Warren hoe blade are one-piece formed steel. Head measures 5¾" x 2⅞". Fire hardened ash handle, 36" long, resists wear and weather. Copper bronze finish on head with bright steel tip. Maroon ferrule.

No. 25L—Wt. doz. 14 lbs. Packed 6 in bundle.

LONG HANDLE 3-PRONG WEEDING HOE
TRUE TEMPER

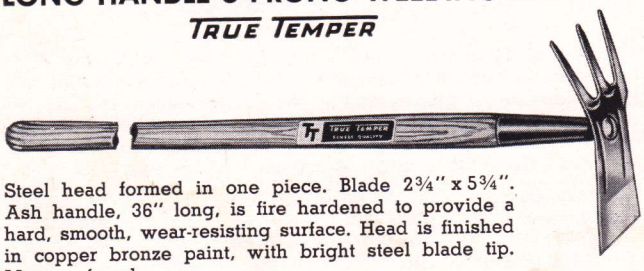

Steel head formed in one piece. Blade 2¾" x 5¾". Ash handle, 36" long, is fire hardened to provide a hard, smooth, wear-resisting surface. Head is finished in copper bronze paint, with bright steel blade tip. Maroon ferrule.

No. 24L—Wt. doz. 14 lbs. Packed 6 in bundle.

LONG-HANDLE 4-TOOTH RAKE
TRUE TEMPER



Four steel teeth formed in one piece. Head is 3½" wide, teeth 2¾" long. 36" long ash handle is fire hardened, a long wearing, weather resisting finish. Copper bronze finish on head, maroon ferrule.

No. 26L—Wt. doz. 13 lbs. Packed 6 in bundle.

TRUE TEMPER Lawn and Leaf Rakes

LARGE PULL-TYPE LAWN RAKE

TRUE TEMPER 'DYNAMIC'

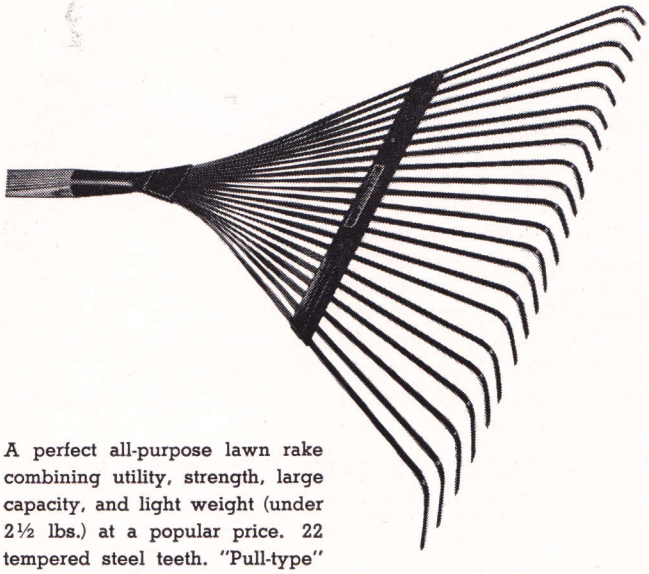

A perfect all-purpose lawn rake combining utility, strength, large capacity, and light weight (under 2½ lbs.) at a popular price. 22 tempered steel teeth. "Pull-type" straight edge. Powerful flex action permits light combing or stiff scratching with minimum effort. Tooth spacer bar distributes flex action over entire width of head. One-piece tubular socket ferrule of heavy gauge steel. Head finished bright green. Fire hardened ash handle. Large capacity: 19" head length, and 2" raking depth. 6 heads in carton, 6 handles in bundle

No.	Handle	Width	Wt. Doz.	Repair Handle
DL22	4⅓ ft.	22"	29 lbs.	**TBR4⅓**

NEW DELUXE SPRING-BACK RAKE

TRUE TEMPER

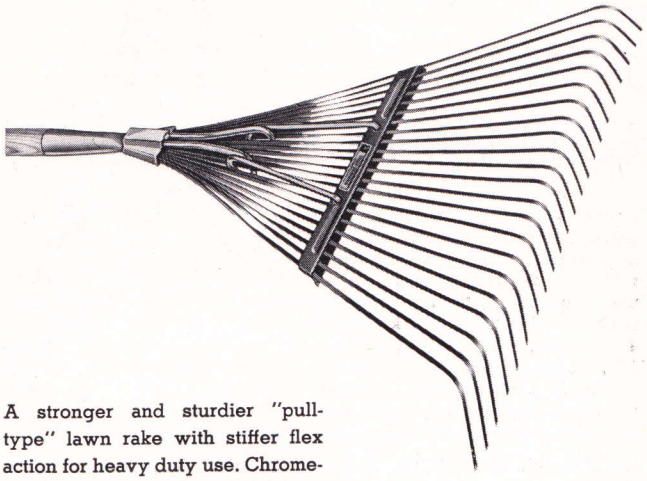

A stronger and sturdier "pull-type" lawn rake with stiffer flex action for heavy duty use. Chrome-plated steel spring provides extra rigidity when needed in heavy litter . . . adds sales making eye appeal. A special chrome-plated spring clip reinforces one-piece tubular socket. Straight edge with large capacity. 22 tempered steel teeth with tooth spacer bar that distributes flex action across full width of head. Head finished in metallic maroon. Ash handle with fire hardened finish. 19" head length. 2" raking depth. 6 heads in carton, 6 handles in bundle.

No.	Handle	Width	Wt. Doz.	Repair Handle
SL22	4⅓ ft.	22"	32 lbs.	**TBR4⅓**

LARGE CAPACITY LAWN RAKE

TRUE TEMPER 'LAWNCOMB'

Finest quality construction with 24-tooth efficiency for raking lawns without harming grass roots. Wide, flat arc permits all teeth to touch the ground with each raking motion. Teeth are easily replaceable. Heads finished olive green. Select ash handle, fire hardened finish. 6 heads in carton, 6 handles in bundle.

No.	Handle	Teeth	Width	Wt. Doz.	Repair Handle
LC24	5 ft.	9½"	24"	38 lbs.	**TBR5**
LC18	4⅓ ft.	8"	18"	30 lbs.	**TBR4⅓**
LC18S	3½ ft.	8"	18"	26 lbs.	**TBR3½**

Add suffix "T" to catalog number when ordering replacement teeth.

SWEEP-TYPE LAWN (BRUME) RAKE

TRUE TEMPER

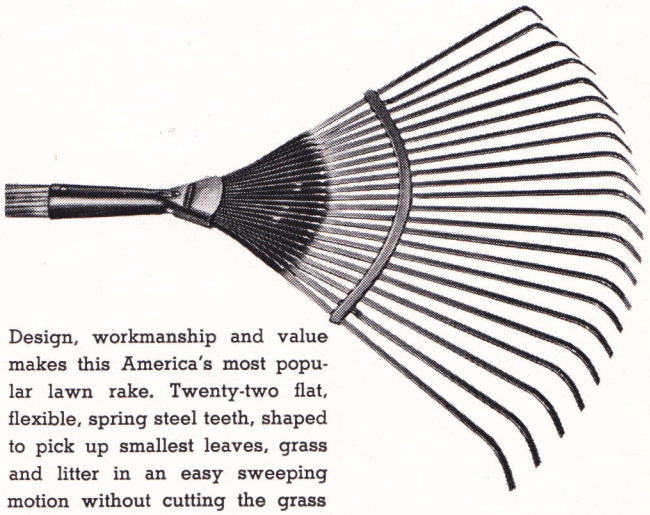

Design, workmanship and value makes this America's most popular lawn rake. Twenty-two flat, flexible, spring steel teeth, shaped to pick up smallest leaves, grass and litter in an easy sweeping motion without cutting the grass roots. Head finished in copper bronze. Ash handle with smooth, fire hardened finish to resist weather and wear, feels good and looks good. Tubular socket of heavy gauge steel. Overall length 56". 12 heads in carton, 12 handles in bundle.

No.	Handle	Width	Wt. Doz.	Repair Handle
FBR22	3½ ft.	19"	24 lbs.	**TBR3½**

TRUE TEMPER Garden Rakes

15-TOOTH GARDEN BOW RAKE
TRUE TEMPER

Forged from a bar of solid steel. Extra long rounded bow provides a powerful spring action with maximum strength to stand rough use. Tapered teeth are properly curved and dished to rake clean and are 2¾" long. Width of head 15", copper bronze finish. Overall depth of head 3¼". Shaped 5 ft. ash handle has knob end and is fire-hardened. Long plain ferrule in maroon lacquer.

No. B15—Wt. doz. 38 lbs. Tied 6 in bundle. Repair handle **TR5C.**

12-TOOTH GARDEN BOW RAKE
TRUE TEMPER

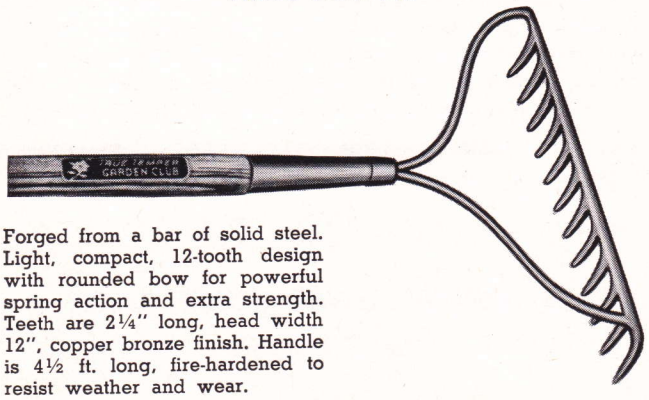

Forged from a bar of solid steel. Light, compact, 12-tooth design with rounded bow for powerful spring action and extra strength. Teeth are 2¼" long, head width 12", copper bronze finish. Handle is 4½ ft. long, fire-hardened to resist weather and wear.

No. B12—Wt. doz. 28 lbs. Packed 6 in bundle. Repair handle **TR4½C.**

14-TOOTH LEVEL HEAD RAKE
TRUE TEMPER 'DYNAMIC'

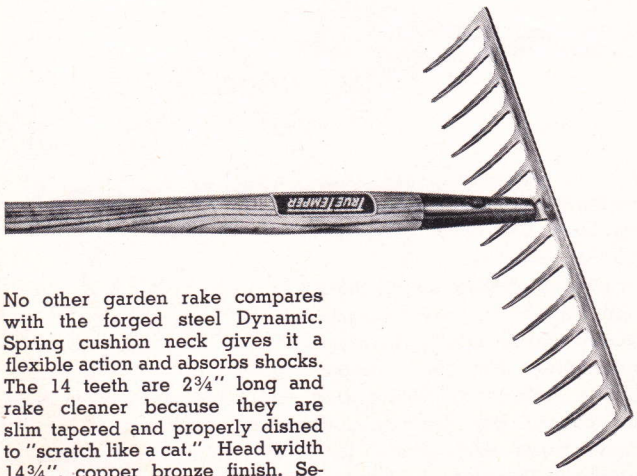

No other garden rake compares with the forged steel Dynamic. Spring cushion neck gives it a flexible action and absorbs shocks. The 14 teeth are 2¾" long and rake cleaner because they are slim tapered and properly dished to "scratch like a cat." Head width 14¾", copper bronze finish. Select ash handle, 5½ ft. long, is shaped with a spring neck. Fire-hardened finish. Long plain ferrule in crystal maroon lacquer.

No. T14—Wt. doz. 33 lbs. Tied 6 in bundle. Repair handle **TR5½.**

8-TOOTH FLORAL RAKE
TRUE TEMPER

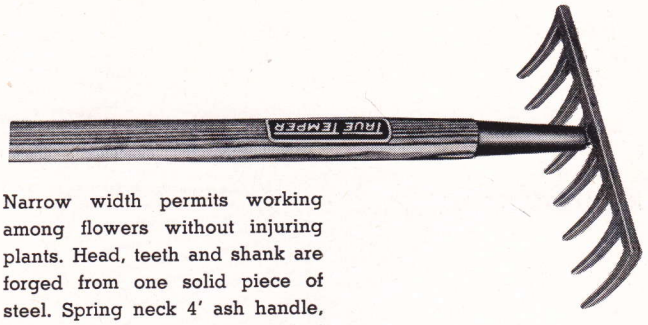

Narrow width permits working among flowers without injuring plants. Head, teeth and shank are forged from one solid piece of steel. Spring neck 4' ash handle, fire-hardened to protect against weather and wear. Crystal maroon ferrule, copper bronze head. Head width 7⅝", teeth 2½" long.

No. TR8—Wt. doz. 18 lbs. Tied 6 in bundle. Repair handle **TR4L.**

14-TOOTH GARDEN BOW RAKE
'BRIAR EDGE' BY TRUE TEMPER

Forged steel head 14" wide, finished in rust resisting gold bronze. Bow design provides powerful spring action with great strength. Slightly curved teeth 2¼" long. Long plain ferrule. 5' sound ash handle with smooth, clear lacquer finish. Ferrule lacquered bright red.

No. PB14—Wt. doz. 32 lbs. Tied 6 in bundle. Repair handle **BR5C.**

14-TOOTH LEVEL HEAD RAKE
'BRIAR EDGE' BY TRUE TEMPER

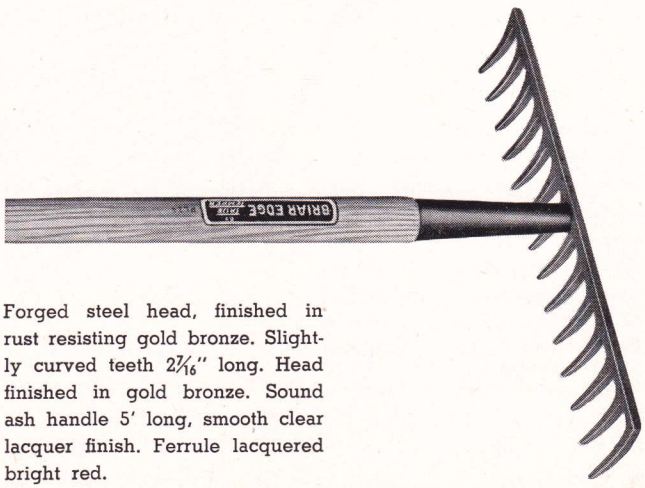

Forged steel head, finished in rust resisting gold bronze. Slightly curved teeth 2 7/16" long. Head finished in gold bronze. Sound ash handle 5' long, smooth clear lacquer finish. Ferrule lacquered bright red.

No. PL14—Wt. doz. 30 lbs. Tied 6 in bundle. Repair handle **BR5.**

TRUE TEMPER Special and Industrial Rakes

GRAVEL AND LAWN-MAKER'S RAKE

TRUE TEMPER

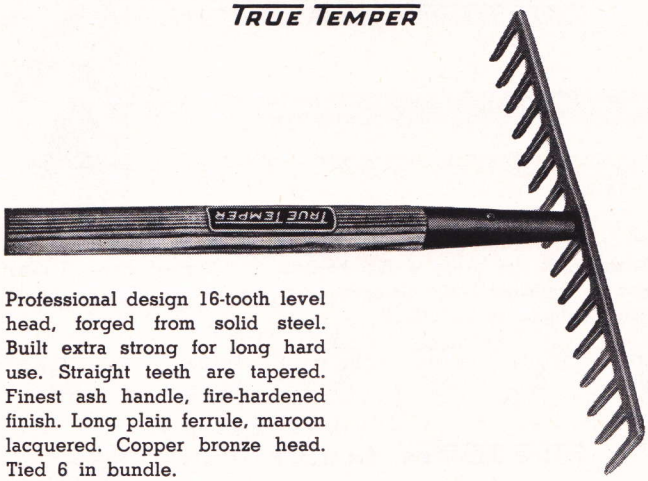

Professional design 16-tooth level head, forged from solid steel. Built extra strong for long hard use. Straight teeth are tapered. Finest ash handle, fire-hardened finish. Long plain ferrule, maroon lacquered. Copper bronze head. Tied 6 in bundle.

No.	Handle	Width	Teeth	Wt. Doz.	Repair Handle
G16	5½ ft.	14"	16—1¾"	35 lbs.	TSR5½

STEEL ASPHALT OR TAR RAKE

TRUE TEMPER HEAVY DUTY

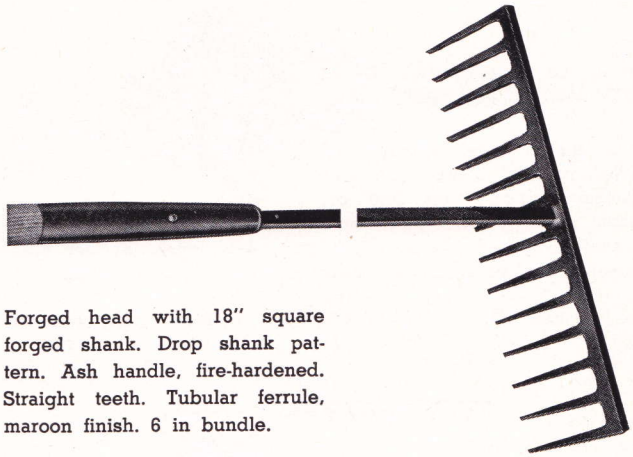

Forged head with 18" square forged shank. Drop shank pattern. Ash handle, fire-hardened. Straight teeth. Tubular ferrule, maroon finish. 6 in bundle.

No.	Handle	Width	Teeth	Wt. Doz.	Repair Handle
1014L	5 ft.	15½"	14—3½"	71 lbs.	TA5
1014H	5 ft.	16½"	14—3⅞"	78 lbs.	TA5

STRAIGHT TOOTH RAKE

TRUE TEMPER

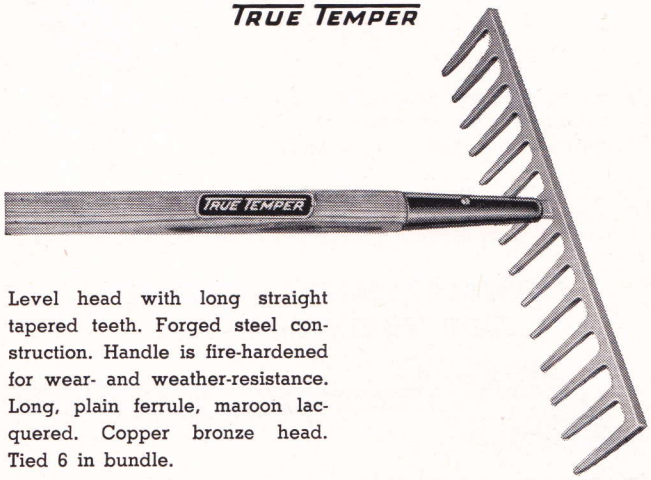

Level head with long straight tapered teeth. Forged steel construction. Handle is fire-hardened for wear- and weather-resistance. Long, plain ferrule, maroon lacquered. Copper bronze head. Tied 6 in bundle.

No.	Handle	Width	Teeth	Wt. Doz.	Repair Handle
14L	5½ ft.	14¾"	14—3¼"	36 lbs.	TSR5½
16L	5½ ft.	17"	16—3¼"	38 lbs.	TSR5½

ROAD OR STONE RAKE

TRUE TEMPER HEAVY DUTY

Forged steel head with heavy straight teeth. Ash handle, fire-hardened. Long plain ferrule, maroon finish. 6 in bundle.

No.	Handle	Width	Teeth	Wt. Doz.	Repair Handle
X14	5½ ft.	15½"	14—3½"	51 lbs.	TRR5½
X16	5½ ft.	17⅞"	16—3½"	54 lbs.	TRR5½

24-TOOTH WIRE LAWN RAKE

TRUE TEMPER

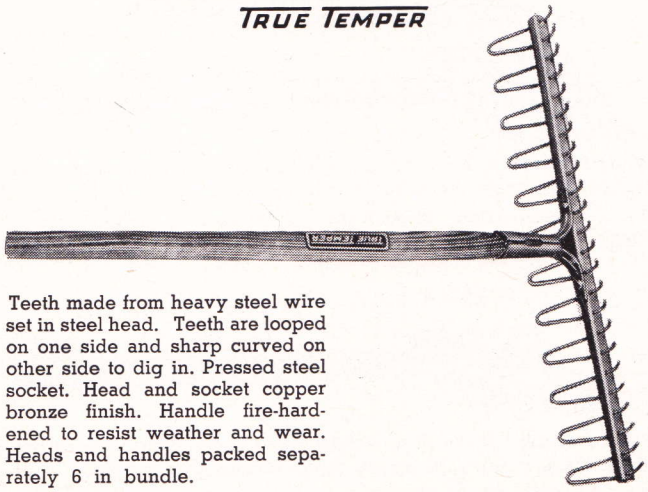

Teeth made from heavy steel wire set in steel head. Teeth are looped on one side and sharp curved on other side to dig in. Pressed steel socket. Head and socket copper bronze finish. Handle fire-hardened to resist weather and wear. Heads and handles packed separately 6 in bundle.

No.	Handle	Width	Wt. Doz.	Repair Handle
124R	5 ft.	20⅝"	35 lbs.	BRS5S

CRAB GRASS OR DANDELION RAKE

TRUE TEMPER

Heads stamped from high carbon steel. Slotted teeth pull out crab grass and nip off dandelion blooms before they go to seed. Does not injure grass or sod. Socket riveted to head. 26 teeth, 1⅜" long. Handle fire-hardened to resist weather and wear. 6 in bundle.

No.	Handle	Width	Wt. Doz.	Repair Handle
CG	5 ft.	15¼"	38 lbs.	TRS5

TRUE TEMPER Edgers and Scrapers

ROTARY EDGERS

TRUE TEMPER—2-WHEEL



High carbon steel construction. Self-sharpening blade with adjustable tension trims fine or coarse grass in either direction. Fire hardened 4' shaped handle riveted to ribbed braces which have 4½" span. Rubber tired wheels. Finished in copper bronze and maroon. 2 in carton.

No.	Cutter Blade Dia.	Wheel Dia.	Wheel Width	Wt. Each	Repair Handle
RE2	6¼"	4½"	1¼"	5¼ lbs.	TR4RE

TRUE TEMPER—1-WHEEL

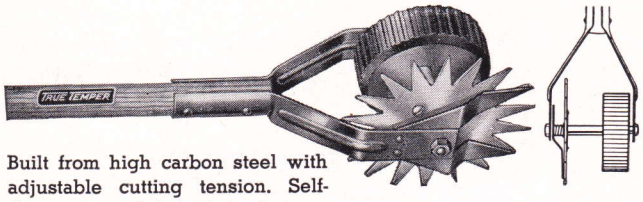

Built from high carbon steel with adjustable cutting tension. Self-sharpening blade trims fine or coarse grass in either direction. Shaped 4' handle, fire hardened, riveted to ribbed braces. Braces have 4½" span. Rubber tired wheel. Finished in copper bronze and maroon. 2 in carton.

No.	Cutter Blade Dia.	Wheel Dia.	Wheel Width	Wt. Each	Repair Handle
RE1	6¼"	4½"	1¼"	4¼ lbs.	TR4RE

TRUE TEMPER CLOSE-COUPLED 1-WHEEL



High carbon steel construction with close-coupled blade and wheel. Self-sharpening blade has adjustable cutting tension. Operates in either direction. Fire hardened 4' shaped handle riveted to ribbed braces. Braces have 3¼" span. Rubber tired wheel. Finished in copper bronze and maroon. 2 in carton.

No.	Cutter Blade Dia.	Wheel Dia.	Wheel Width	Wt. Each	Repair Handle
RE0	6¼"	4½"	1¼"	4 lbs.	TR4RE

EXCLUSIVE SELLING FEATURES of TRUE TEMPER ROTARY EDGERS

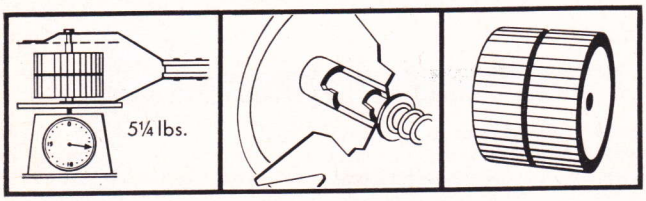

Adequate weight in the head where it's needed for maximum traction & efficiency. (RE2 model above)

Wheel and hub rotate over fixed bushing for smooth, easier operation.

Heavy-duty tires stand up under years of hard use. Cross-ribbed for better traction.

ROUND BLADE EDGERS

TRUE TEMPER SOCKET PATTERN

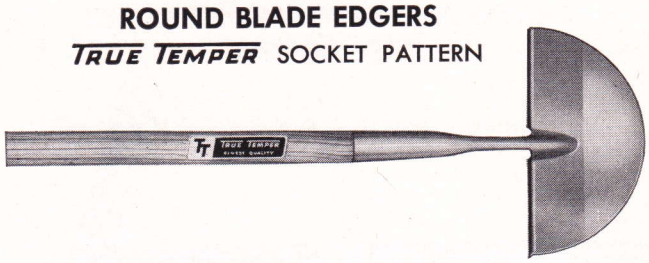

Trims thick sod along walks, borders, etc. Turned steps. Socket and ½ polished blade finished in copper bronze. Fire-hardened ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
040F	4'	9"	4¾"	32 lbs.	TRS4

TRUE TEMPER SHANK PATTERN

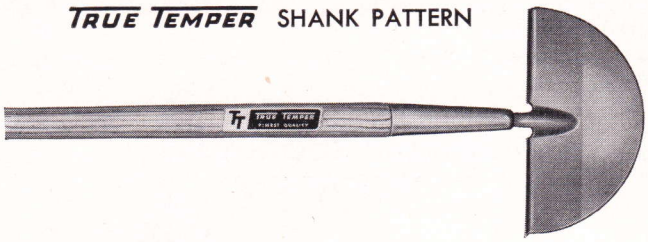

For cutting thick sod or trimming along walks, etc. Turned steps. Blade finished in copper bronze, ½ polished. Plain maroon ferrule. Fire-hardened ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
40F	4'	9"	4¾"	32 lbs.	TC4

SIDEWALK CLEANERS — SCRAPERS

TRUE TEMPER HEAVY DUTY

Built to withstand roughest treatment. Heavyweight blade forged from special analysis high carbon steel. Forged socket for extra strength. 4½ ft. fire hardened ash handle. 6 in bundle.

No.	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
OSC	7"	6"	48 lbs.	TPS4½

TRUE TEMPER MEDIUM WEIGHT

Blade forged from high carbon steel. Forged shank with long plain ferrule. 4½ ft. fire hardened handle. 6 in bundle.

No.	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
CSC	7"	5"	32 lbs.	TC4½

'BRIAR EDGE' LIGHTWEIGHT



Forged shank pattern. Lightweight blade forged from high carbon steel. Black finish. 4 ft. natural finish handle. 6 in bundle.

No.	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
6	7"	5"	27 lbs.	BC4

TRUE TEMPER Cultivators and Weeding Hoes

SPEEDY CULTIVATORS

TRUE TEMPER —4-TINE

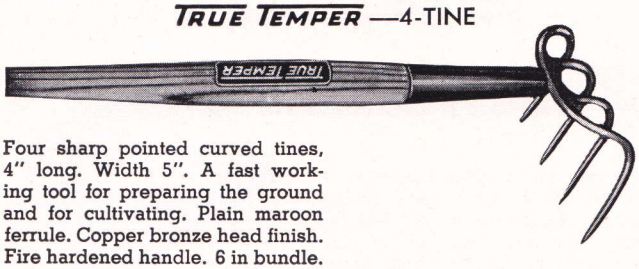

Four sharp pointed curved tines, 4" long. Width 5". A fast working tool for preparing the ground and for cultivating. Plain maroon ferrule. Copper bronze head finish. Fire hardened handle. 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
SC4	4⅓' long	20 lbs.	TR4⅓

TRUE TEMPER —3-TINE

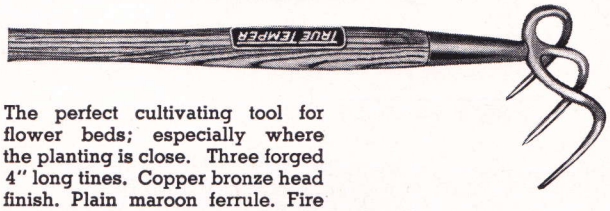

The perfect cultivating tool for flower beds; especially where the planting is close. Three forged 4" long tines. Copper bronze head finish. Plain maroon ferrule. Fire hardened handle. Width 3¼". 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
FW3	4' long	20 lbs.	TR4L

'BRIAR EDGE'—4-TINE

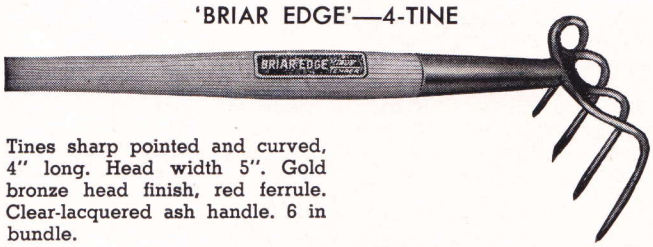

Tines sharp pointed and curved, 4" long. Head width 5". Gold bronze head finish, red ferrule. Clear-lacquered ash handle. 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
PSC4	4⅓' long	20 lbs.	BR4⅓

INVINCIBLE CULTIVATORS

TRUE TEMPER —5-BLADE

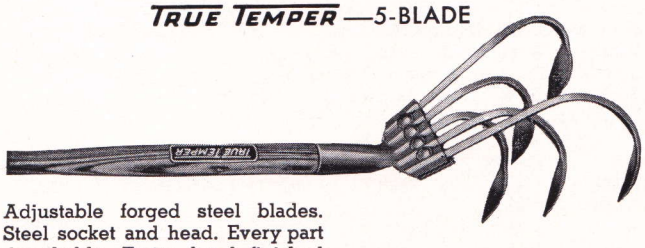

Adjustable forged steel blades. Steel socket and head. Every part detachable. Entire head finished in copper bronze. Ash handle, fire hardened. 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
IGC5	4⅓' long	32 lbs.	TRS4⅓S

TRUE TEMPER —3-BLADE

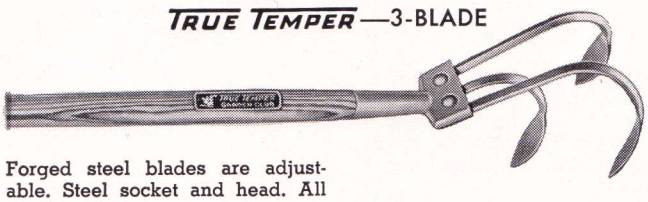

Forged steel blades are adjustable. Steel socket and head. All parts detachable. Copper bronze finish overall. Fire hardened handle. 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
IGC3	4' long	19 lbs.	TRS4S

ONE-PRONG WEEDING HOE

TRUE TEMPER

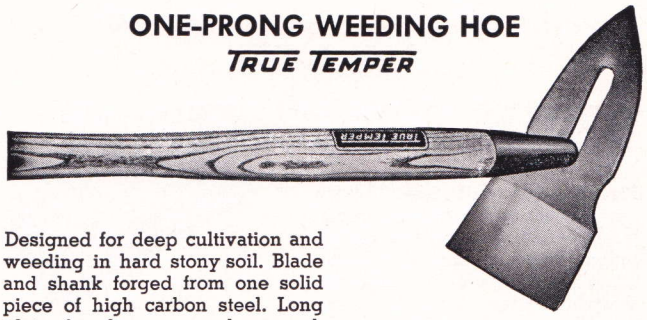

Designed for deep cultivation and weeding in hard stony soil. Blade and shank forged from one solid piece of high carbon steel. Long plain ferrule, maroon lacquered. Polished and sharpened bit, copper bronze point. Ash handle, fire hardened. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
1PF	4⅓'	3½"	8⅛"	27 lbs.	TR4⅓

TWO-PRONG WEEDING HOE

TRUE TEMPER

For deep cultivation and weeding in hard stony soil. Blade and shank forged from solid steel. Polished and sharpened bit. Long plain ferrule, crystalite maroon finish. Copper bronze prongs. Ash handle, fire hardened. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
2PF	4⅓'	3⅝"	8¼"	26 lbs.	TR4⅓

ONE-PRONG WEEDING HOE

'BRIAR EDGE' BY TRUE TEMPER

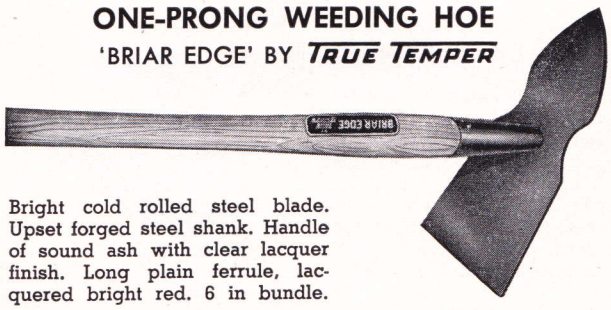

Bright cold rolled steel blade. Upset forged steel shank. Handle of sound ash with clear lacquer finish. Long plain ferrule, lacquered bright red. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
1P	4⅓'	3½"	9"	24 lbs.	BR4⅓

TWO-PRONG WEEDING HOE

'BRIAR EDGE' BY TRUE TEMPER

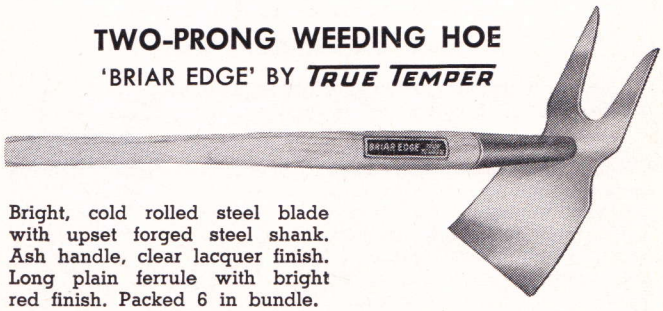

Bright, cold rolled steel blade with upset forged steel shank. Ash handle, clear lacquer finish. Long plain ferrule with bright red finish. Packed 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
2P	4⅓'	3⅝"	9"	22 lbs.	BR4⅓

TRUE TEMPER Garden and Weeding Hoes

IMPROVED DESIGN GARDEN HOE
TRUE TEMPER

Finest quality garden hoe. Thin tapered blade and gooseneck socket for perfect balance and spring action with minimum weight. Taper forged blade full polished, sharpened edge and sides. Copper bronze socket. Spring neck ash handle, fire hardened. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
T06¼	4⅓'	6¼"	2¾"	20 lbs.	TRS4⅓
T07	4⅓'	7"	2¾"	22 lbs.	TRS4⅓

CULTIVATOR, WEEDER HOE
TRUE TEMPER

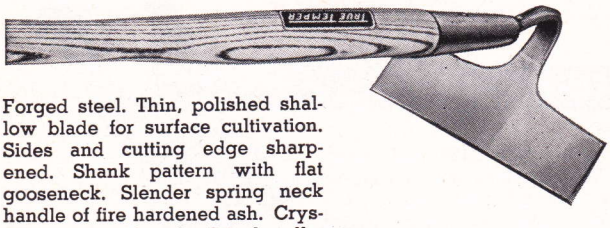

Forged steel. Thin, polished shallow blade for surface cultivation. Sides and cutting edge sharpened. Shank pattern with flat gooseneck. Slender spring neck handle of fire hardened ash. Crystalite maroon ferrule. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
T6¼	4⅓'	6¼"	1¾"	18 lbs.	TR4⅓

WARREN CULTIVATOR HOES
TRUE TEMPER

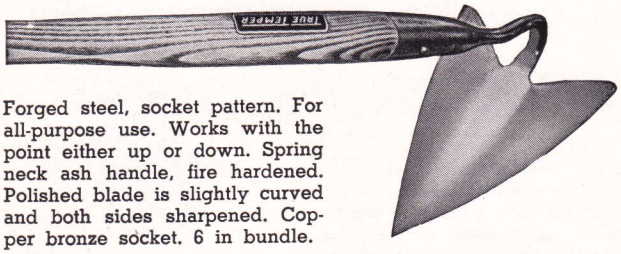

Forged steel, socket pattern. For all-purpose use. Works with the point either up or down. Spring neck ash handle, fire hardened. Polished blade is slightly curved and both sides sharpened. Copper bronze socket. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
W7H	4⅓'	4¾"	6⅝"	24 lbs.	TRS4⅓

SMALL SIZE FLORAL HOE
TRUE TEMPER

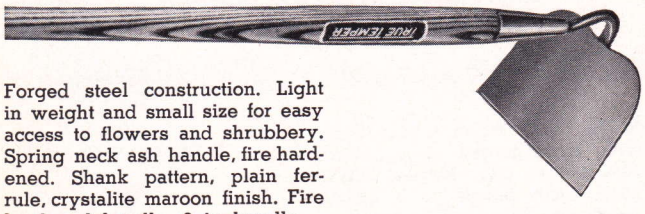

Forged steel construction. Light in weight and small size for easy access to flowers and shrubbery. Spring neck ash handle, fire hardened. Shank pattern, plain ferrule, crystalite maroon finish. Fire hardened handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
LY5	4'	5"	3¾"	21 lbs.	TR4L

STANDARD GARDEN OR FIELD HOES
TRUE TEMPER SOCKET PATTERN

Forged steel, socket pattern. Polished blade has sharp cutting edge. Spring neck ash handle, fire hardened, has spring neck for powerful flexing action. Socket finished in copper bronze. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
G06¼	4⅓'	6¼"	4¼"	26 lbs.	TRS4⅓
G07	4⅓'	7"	4¼"	28 lbs.	TRS4⅓
G08	4⅓'	8"	4½"	30 lbs.	TRS4⅓

TRUE TEMPER SHANK PATTERN

Forged steel, shank pattern. Blade is polished with sharp cutting edge. Spring neck ash handle has powerful flexing action. Fire hardened finish. Crystalite maroon ferrule. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
G6¼	4⅓'	6¼"	4¼"	25 lbs.	TR4⅓
G7	4⅓'	7"	4¼"	27 lbs.	TR4⅓
G8	4⅓'	8"	4½"	29 lbs.	TR4⅓

'BRIAR EDGE' SOCKET PATTERN

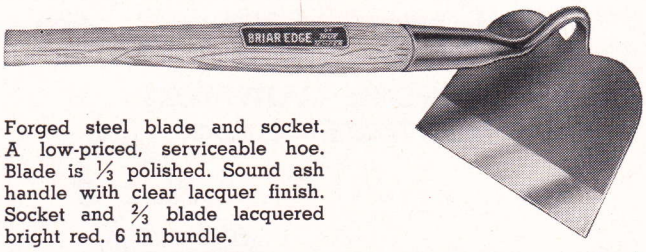

Forged steel blade and socket. A low-priced, serviceable hoe. Blade is ⅓ polished. Sound ash handle with clear lacquer finish. Socket and ⅔ blade lacquered bright red. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
PG06¼	4⅓'	6¼"	4¼"	26 lbs.	BRS4⅓
PG07	4⅓'	7"	4¼"	27 lbs.	BRS4⅓
PG08	4⅓'	8"	4½"	28 lbs.	BRS4⅓

'BRIAR EDGE' SHANK PATTERN

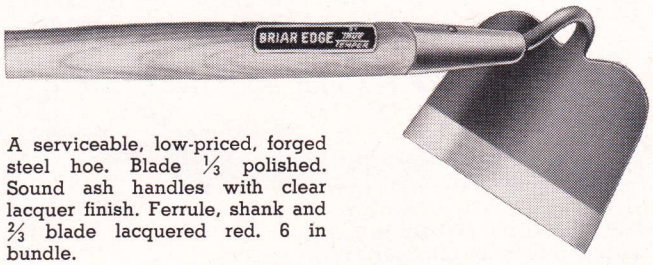

A serviceable, low-priced, forged steel hoe. Blade ⅓ polished. Sound ash handles with clear lacquer finish. Ferrule, shank and ⅔ blade lacquered red. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
PG6¼	4⅓'	6¼"	4¼"	26 lbs.	BR4⅓
PG7	4⅓'	7"	4¼"	27 lbs.	BR4⅓
PG8	4⅓'	8"	4½"	28 lbs.	BR4⅓

TRUE TEMPER Garden and Nursery Hoes

NARROW BLADE NURSERY HOE

TRUE TEMPER

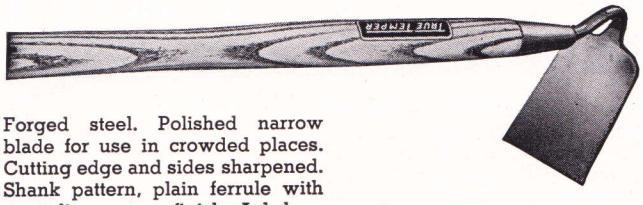

Forged steel. Polished narrow blade for use in crowded places. Cutting edge and sides sharpened. Shank pattern, plain ferrule with crystalite maroon finish. Ash handle, fire hardened. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
N2½	4'	2½"	3½"	16 lbs.	**TR4L**

WONDER CULTIVATOR

TRUE TEMPER

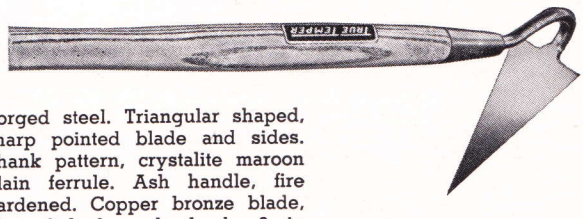

Forged steel. Triangular shaped, sharp pointed blade and sides. Shank pattern, crystalite maroon plain ferrule. Ash handle, fire hardened. Copper bronze blade, ½ polished, and shank. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
WW1	4'	2"	4¼"	15 lbs.	**TR4L**

SWAN NECK WEEDER

TRUE TEMPER



Forged steel blade and arched shank. Design permits use behind and around plants where access is limited. Blade is polished, with sharpened point and sides. Copper bronze shank, crystalite maroon ferrule. Ash handle, fire hardened. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
SN3	4'	3⅜"	3⅜"	17 lbs.	**TR4L**

NURSERYMEN'S OR BEET HOE

TRUE TEMPER



Cutting edges and sides sharpened. Polished forged blade. Socket pattern. Ash handle, fire hardened. 6 in bundle.

No.	Handle	Blade Width	Blade Center	Depth Sides	Weight Doz.	Repair Handle
N06	4⅓'	6"	3⅜"	2¼"	26 lbs.	**TRS4⅓**
N07	4⅓'	7"	3⅝"	2¼"	26 lbs.	**TRS4⅓**
N08	4⅓'	8"	3⅝"	2¼"	27 lbs.	**TRS4⅓**

SHORT HANDLE BEET THINNING HOES

TRUE TEMPER NURSERYMEN PATTERN

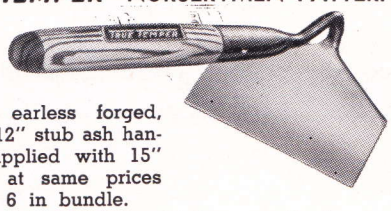

Socket pattern, earless forged, polished blade. 12" stub ash handle, red tip. Supplied with 15" or 18" handle at same prices when specified. 6 in bundle.

No.	Handle	Blade Width	Blade Center	Depth Sides	Wt. Doz.
N06S	12"	6"	3⅜"	2¼"	16 lbs.
N07S	12"	7"	3⅝"	2¼"	16 lbs.
N08S	12"	8"	3⅝"	2¼"	17 lbs.

TRUE TEMPER FIELD TRIM PATTERN

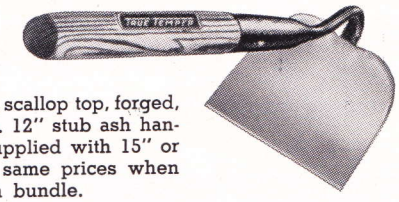

Socket pattern, scallop top, forged, polished blade. 12" stub ash handle, red tip. Supplied with 15" or 18" handle at same prices when specified. 6 in bundle.

No.	Handle	Blade Width	Depth at Center	Wt. Doz.
G04½S	12"	4½"	4¼"	15 lbs.
G05S	12"	5"	4¼"	15 lbs.
G06¼S	12"	6¼"	4¼"	16 lbs.
G07S	12"	7"	4¼"	16 lbs.
G08S	12"	8"	4¼"	17 lbs.

TRUE TEMPER LADY HOE PATTERN

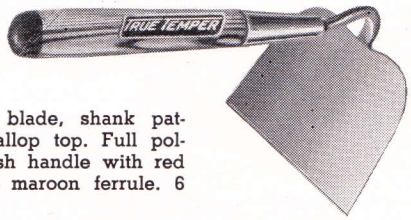

Forged steel blade, shank pattern, with scallop top. Full polished. Stub ash handle with red tip. Crystalite maroon ferrule. 6 in bundle.

No.	Handle	Blade Width	Depth at Center	Wt. Doz.
LY5S	12"	5"	3¾"	15 lbs.

NURSERY OR SUGAR BEET HOES

'BRIAR EDGE' SHANK PATTERN

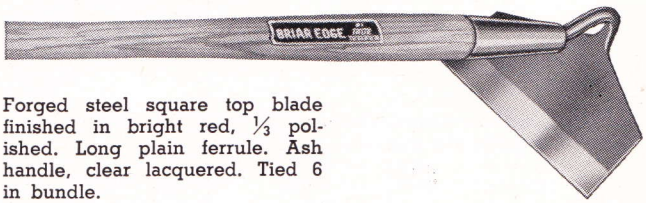

Forged steel square top blade finished in bright red, ⅓ polished. Long plain ferrule. Ash handle, clear lacquered. Tied 6 in bundle.

No.	Handle	Blade	Wt. Doz.	Repair Handle
PN6	4⅓'	6"	25 lbs.	**BR4⅓**
PN7	4⅓'	7"	26 lbs.	**BR4⅓**

'BRIAR EDGE' SOCKET PATTERN

Forged steel square top blade and long socket. Bright red finish on metal with blade ⅓ polished. Ash handle, clear lacquered. 6 in bundle.

No.	Handle	Blade	Wt. Doz.	Repair Handle
PN06	4⅓'	6"	25 lbs.	**BRS4⅓**
PN07	4⅓'	7"	26 lbs.	**BRS4⅓**
PN08	4⅓'	8"	27 lbs.	**BRS4⅓**

TRUE TEMPER Special Hoes

NEW ENGLAND MEADOW HOES
TRUE TEMPER

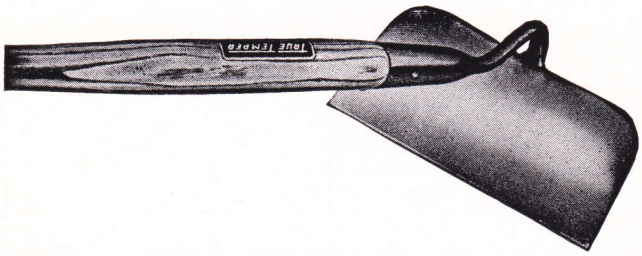

Wide, thin, shallow blade mulches the top soil. Forged steel, full polished blade. Socket pattern. Spring neck ash handle, fire hardened. Socket finished in copper bronze. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
M08	4⅓'	8"	3½"	28 lbs.	**TRS4⅓**
M09	4⅓'	9"	3½"	29 lbs.	**TRS4⅓**

'BRIAR EDGE' BY TRUE TEMPER

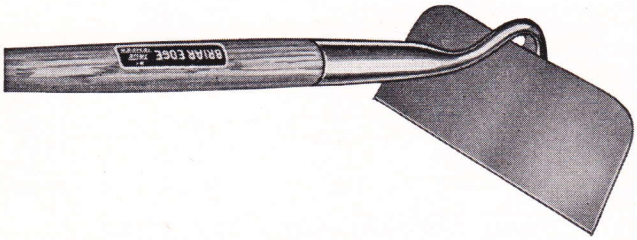

A serviceable hoe with special shallow blade, ⅓ polished. Forged steel, socket pattern. Bright red finish on socket and upper ⅔ of blade. Clear finish handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
PM08	4⅓'	8"	3½"	26 lbs.	**BRS4⅓**
PM09	4⅓'	9"	3½"	27 lbs.	**BRS4⅓**

ELY CORN AND TOBACCO HOE
TRUE TEMPER

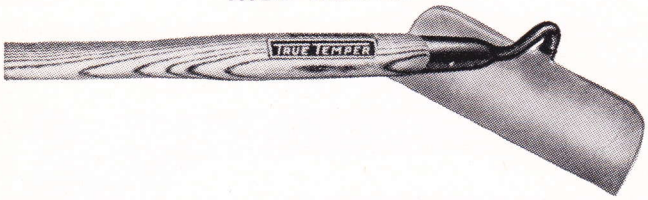

Extra thin, shallow forged blade, polished. Socket pattern. Spring neck ash handle, fire hardened. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
CT08½	4⅓'	8½"	2¾"	27 lbs.	**TRS4⅓**

For 2" blade depth, specify **No. CT08½2.**

SQUARE TOP ONION HOE
TRUE TEMPER

Shallow, forged steel blade, full polished. Sides as well as cutting edge sharpened. Ash handle, fire hardened. Shank pattern, long plain ferrule. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
S71¾	4⅓'	7"	1¾"	21 lbs.	**TR4⅓L**

TRUE TEMPER Mattocks

GARDEN CUTTER MATTOCK
TRUE TEMPER

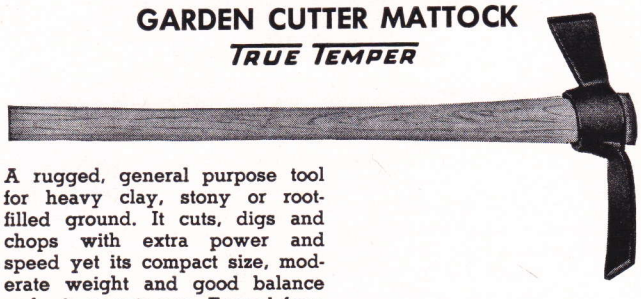

A rugged, general purpose tool for heavy clay, stony or root-filled ground. It cuts, digs and chops with extra power and speed yet its compact size, moderate weight and good balance make it easy to use. Forged from special analysis steel, properly heat treated for strength. Finished in bright red. Blade 3" wide, 5½" long. Cutter 2½" wide, 3¾" long. White lacquer hickory handle. No. 7 eye. 6 heads in carton, 6 handles in bundle.

No.	Handle	Head Wt.	Head Length	Wt. Doz.
200H	36"	3 lbs.	13"	48 lbs.

DIG EZY MATTOCK
TRUE TEMPER

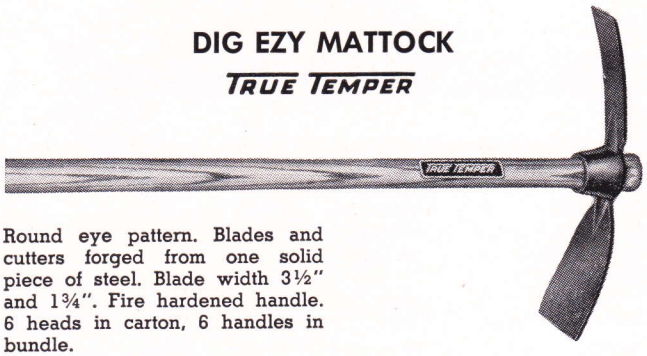

Round eye pattern. Blades and cutters forged from one solid piece of steel. Blade width 3½" and 1¾". Fire hardened handle. 6 heads in carton, 6 handles in bundle.

No.	Handle	Head Length	Wt. Doz.	Repair Handle
DE3	4½ ft.	13¾"	40 lbs.	**TMHR4½**

SOUTHERN QUEEN MATTOCK
TRUE TEMPER

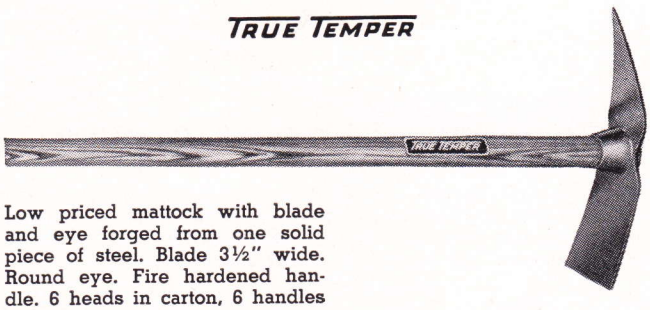

Low priced mattock with blade and eye forged from one solid piece of steel. Blade 3½" wide. Round eye. Fire hardened handle. 6 heads in carton, 6 handles in bundle.

No.	Handle	Head Length	Wt. Doz.	Repair Handle
SQ3½	4½ ft.	11½"	32 lbs.	**TMHR4½**

FORGED STEEL ICE CHISEL
TRUE TEMPER

Heavy forged steel blade, half polished. Blade 3¼" wide, 6¼" deep, 9/16" thick at socket end. Tapered to sharp cutting edge. 4 ft. heavy ash handle, fire hardened. 6 in bundle.

No.	Blade Size	Weight Doz.	Repair Handle
3¼C	3¼" x 6¼"	46 lbs.	**T4IC**

TRUE TEMPER Scuffles and Special Tools

LIGHT WEIGHT SCUFFLE HOE

TRUE TEMPER

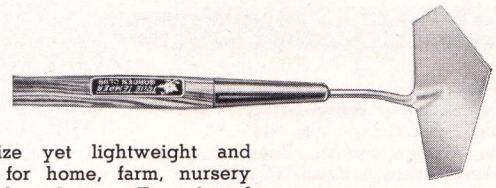

Full size yet lightweight and sturdy for home, farm, nursery and truck gardening. Forged steel blade is designed for easiest push-pull action. Bent shank and blade have copper bronze finish. Blade ½ polished. Beveled edge sharpened on all sides. Long plain maroon ferrule. Fire hardened ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
GS7	4⅓ ft.	7¼"	3⅝"	18 lbs.	TR4⅓

GARDEN SCUFFLE HOE

TRUE TEMPER

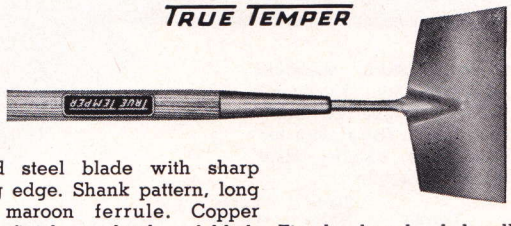

Forged steel blade with sharp cutting edge. Shank pattern, long plain maroon ferrule. Copper bronze finish on shank and blade. Fire hardened ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
A25	5 ft.	7½"	4"	29 lbs.	TR5

DIAMOND BLADE SCUFFLE HOE

TRUE TEMPER

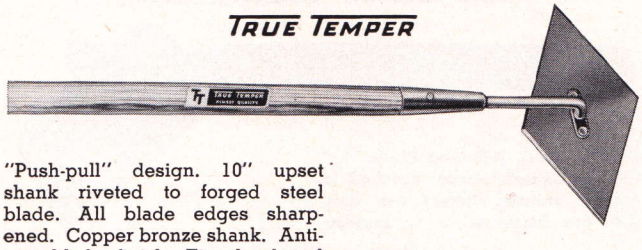

"Push-pull" design. 10" upset shank riveted to forged steel blade. All blade edges sharpened. Copper bronze shank. Anti-rust blade finish. Fire hardened ash handle. Long plain maroon ferrule. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
DBS	4½ ft.	10½"	5"	42 lbs.	TC4½

PUSH-PULL SCUFFLE HOE

TRUE TEMPER

Upset shank riveted to forged steel blade. Blade sharpened front and back. Long plain maroon ferrule. Copper bronze shank and anti-rust blade finish. Fire hardened ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
XGS	4½ ft.	8"	2½"	31 lbs.	TR4½

ORANGE GROVE SCUFFLE HOE

TRUE TEMPER

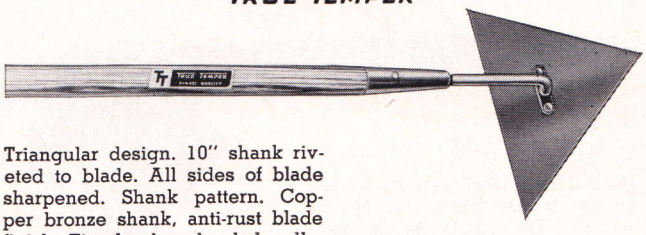

Triangular design. 10" shank riveted to blade. All sides of blade sharpened. Shank pattern. Copper bronze shank, anti-rust blade finish. Fire hardened ash handle. Long plain maroon ferrule. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
OGS	5½ ft.	12"	6"	42 lbs.	TC5½

RAILROAD SCUFFLE HOE

TRUE TEMPER

Heavy blade and shank forged from one solid piece of steel. Anti-rust blade finish. Fire hardened ash handle. Long plain maroon ferrule. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
RS84	5 ft.	8½"	4"	40 lbs.	TRR5

FORGED STEEL DOCK CUTTER

TRUE TEMPER



Polished blade. Long tubular ferrule. Fire hardened ash handle. Maroon ferrule, copper bronze trim. 6 in bundle.

No.	Handle	Blade	Wt. Doz.	Repair Handle
39C	4'	2½" x 10½"	53 lbs.	TGS4
39D	30" IDL D Top	2½" x 10½"	54 lbs.	TGSI

SOD LIFTER

TRUE TEMPER



Blade and 18" shank forged from solid steel. Polished blade. Fire hardened ash handle 32" long, IDL steel D Top. Tubular ferrule. Shank is set at proper angle for straight under cut. 6 in bundle.

No.	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
1	9"	5"	58 lbs.	TIM32SL

TRUE TEMPER Southern Hoes

REGULAR PATTERN COTTON HOES
TRUE TEMPER

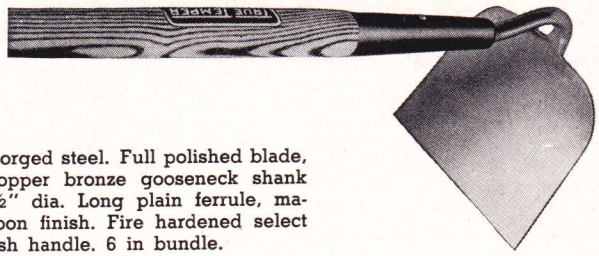

Forged steel. Full polished blade, copper bronze gooseneck shank ½" dia. Long plain ferrule, maroon finish. Fire hardened select ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
C64½	4½'	6"	5"	33 lbs.	**TC4½**
C65	5'	6"	5"	35 lbs.	**TC5**
C75	5'	7"	5"	36 lbs.	**TC5**
C85	5'	8"	5"	38 lbs.	**TC5**

'BRIAR EDGE'

Forged steel head with ½" dia. gooseneck shank. Bright red metal finish with ⅓ polished blade. Long plain ferrule. Ash handle, clear finish. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
PC64½	4½'	6"	5"	33 lbs.	**BC4½**
PC65	5'	6"	5"	35 lbs.	**BC5**
PC75	5'	7"	5"	36 lbs.	**BC5**
PC85	5'	8"	5"	38 lbs.	**BC5**

LIGHT PATTERN COTTON HOES
TRUE TEMPER

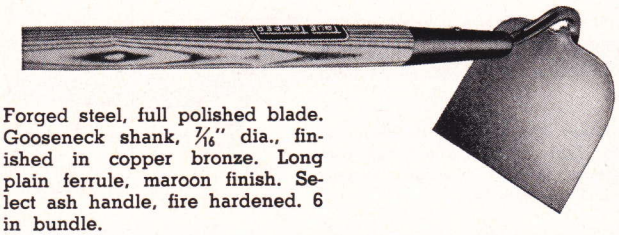

Forged steel, full polished blade. Gooseneck shank, 7/16" dia., finished in copper bronze. Long plain ferrule, maroon finish. Select ash handle, fire hardened. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
LC64½	4½'	6"	4⅝"	27 lbs.	**TR4½**
LC65	5'	6"	4⅝"	28 lbs.	**TR5**
LC75	5'	7"	4¾"	30 lbs.	**TR5**

'BRIAR EDGE'

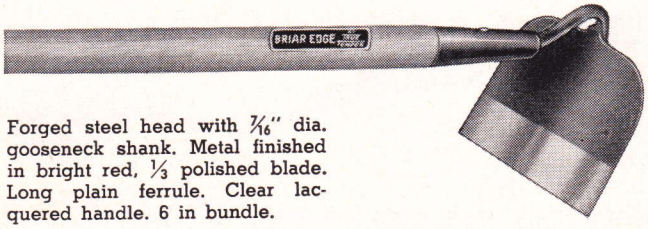

Forged steel head with 7/16" dia. gooseneck shank. Metal finished in bright red, ⅓ polished blade. Long plain ferrule. Clear lacquered handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
PLC64½	4½'	6"	4⅝"	27 lbs.	**BR4½**
PLC65	5'	6"	4⅝"	28 lbs.	**BR5**
PLC75	5'	7"	4¾"	30 lbs.	**BR5**

FIELD TRIM LIGHT COTTON HOES
TRUE TEMPER

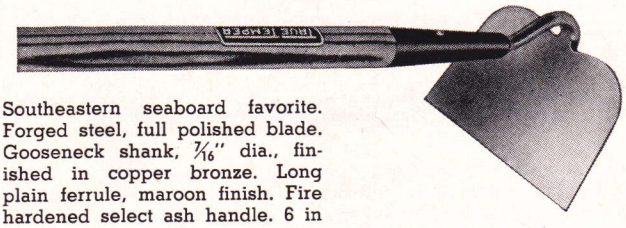

Southeastern seaboard favorite. Forged steel, full polished blade. Gooseneck shank, 7/16" dia., finished in copper bronze. Long plain ferrule, maroon finish. Fire hardened select ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
LCF54½	4½'	5"	4¼"	24 lbs.	**TR4½**
LCF55	5'	5"	4¼"	26 lbs.	**TR5**
LCF64½	4½'	6¼"	4¼"	27 lbs.	**TR4½**
LCF65	5'	6¼"	4¼"	29 lbs.	**TR5**
LCF75	5'	7"	4¼"	31 lbs.	**TR5**

'BRIAR EDGE'

Popular southeastern seaboard pattern. Forged steel, gooseneck shank 7/16" dia. Bright red finish, ⅓ polished blade. Long plain ferrule. Sound ash handle, clear lacquered. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
PLCF54½	4½'	5"	4¼"	24 lbs.	**BR4½**
PLCF55	5'	5"	4¼"	26 lbs.	**BR5**
PLCF64½	4½'	6¼"	4¼"	27 lbs.	**BR4½**
PLCF65	5'	6¼"	4¼"	29 lbs.	**BR5**
PLCF75	5'	7"	4¼"	31 lbs.	**BR5**

SOUTHERN MEADOW, BLACKLAND HOES
TRUE TEMPER SOCKET PATTERN

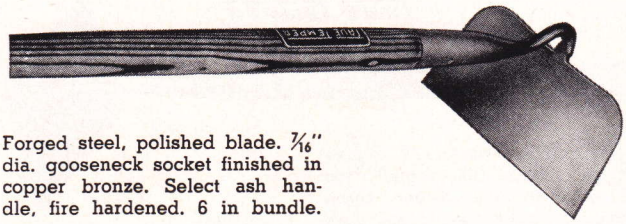

Forged steel, polished blade. 7/16" dia. gooseneck socket finished in copper bronze. Select ash handle, fire hardened. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
SM06	5'	6"	3½"	30 lbs.	**TRS5**
SM07	5'	7"	3½"	31 lbs.	**TRS5**
SM08	5'	8"	3½"	32 lbs.	**TRS5**
SM09	5'	9"	3½"	33 lbs.	**TRS5**
SM010	5'	10"	3½"	34 lbs.	**TRS5**

'BRIAR EDGE' SOCKET PATTERN

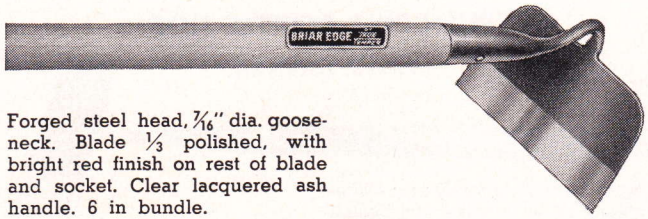

Forged steel head, 7/16" dia. gooseneck. Blade ⅓ polished, with bright red finish on rest of blade and socket. Clear lacquered ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
PSM06	5'	6"	3½"	30 lbs.	**BRS5**
PSM07	5'	7"	3½"	31 lbs.	**BRS5**
PSM08	5'	8"	3½"	32 lbs.	**BRS5**
PSM09	5'	9"	3½"	33 lbs.	**BRS5**
PSM010	5'	10"	3½"	34 lbs.	**BRS5**

TRUE TEMPER Southern Hoes

SOUTHERN MEADOW, BLACKLAND HOES

TRUE TEMPER SHANK PATTERN

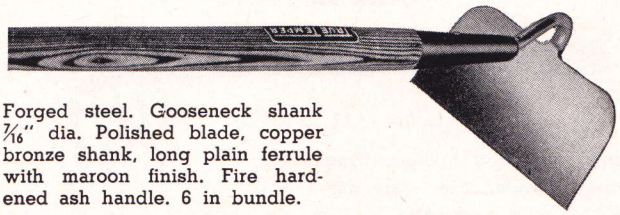

Forged steel. Gooseneck shank 7/16" dia. Polished blade, copper bronze shank, long plain ferrule with maroon finish. Fire hardened ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
SM7	5'	7"	3½"	29 lbs.	TR5
SM8	5'	8"	3½"	30 lbs.	TR5

'BRIAR EDGE' SHANK PATTERN

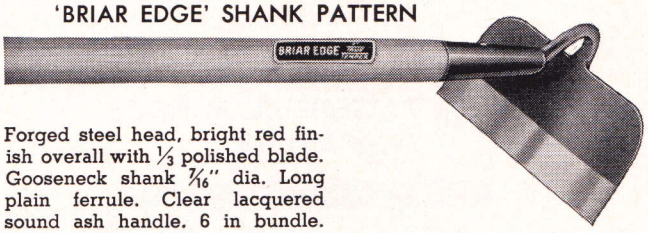

Forged steel head, bright red finish overall with 1/3 polished blade. Gooseneck shank 7/16" dia. Long plain ferrule. Clear lacquered sound ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
PSM7	5'	7"	3½"	29 lbs.	BR5
PSM8	5'	8"	3½"	30 lbs.	BR5

COTTON CHOPPER HOES

TRUE TEMPER

For heavy chopping. Full polished forged steel blade with straight shank ½" dia. Long plain ferrule, maroon finish. Fire hardened ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
CC7	5'	7"	4"	36 lbs.	TC5
CC8	5'	8"	4"	38 lbs.	TC5

'BRIAR EDGE'

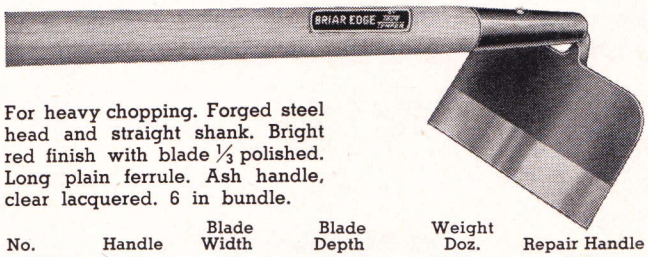

For heavy chopping. Forged steel head and straight shank. Bright red finish with blade 1/3 polished. Long plain ferrule. Ash handle, clear lacquered. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
PCC7	5'	7"	4"	36 lbs.	BC5
PCC8	5'	8"	4"	38 lbs.	BC5

STRAIGHT SHANK COTTON HOE

'BRIAR EDGE'

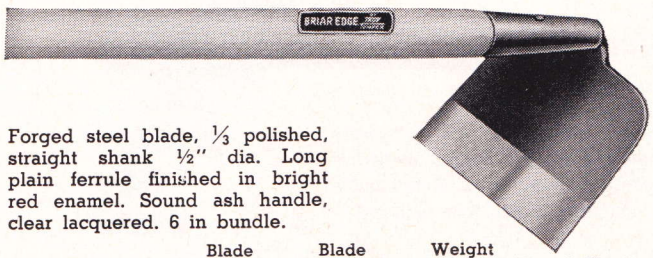

Forged steel blade, 1/3 polished, straight shank ½" dia. Long plain ferrule finished in bright red enamel. Sound ash handle, clear lacquered. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
PSC75	5'	7"	5¼"	36 lbs.	BC5

GOOSENECK PLANTER HOES

TRUE TEMPER

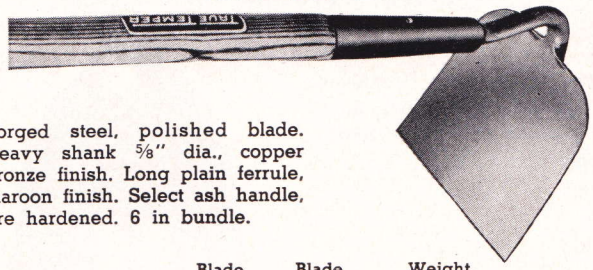

Forged steel, polished blade. Heavy shank 5/8" dia., copper bronze finish. Long plain ferrule, maroon finish. Select ash handle, fire hardened. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
P54½	4½'	5"	5¼"	35 lbs.	TP4½
P64½	4½'	6"	5½"	36 lbs.	TP4½
P55	5'	5"	5¼"	37 lbs.	TP5
P65	5'	6"	5½"	38 lbs.	TP5
P75	5'	7"	5¾"	39 lbs.	TP5
P855	5'	8½"	6"	41 lbs.	TP5
P95½	5½'	9"	6¼"	44 lbs.	TP5½

'BRIAR EDGE'

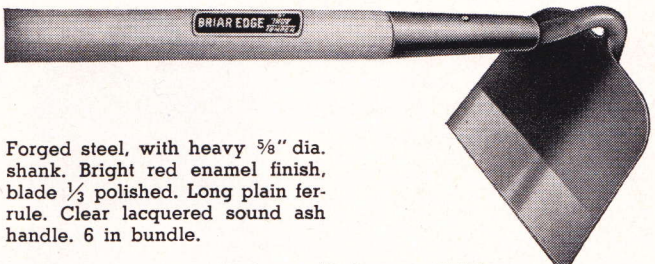

Forged steel, with heavy 5/8" dia. shank. Bright red enamel finish, blade 1/3 polished. Long plain ferrule. Clear lacquered sound ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
PP54½	4½'	5"	5¼"	35 lbs.	BP4½
PP64½	4½'	6"	5½"	36 lbs.	BP4½
PP55	5'	5"	5¼"	37 lbs.	BP5
PP65	5'	6"	5½"	38 lbs.	BP5
PP75	5'	7"	5¾"	39 lbs.	BP5
PP855	5'	8½"	5¾"	41 lbs.	BP5

STRAIGHT SHANK PLANTER HOES

TRUE TEMPER

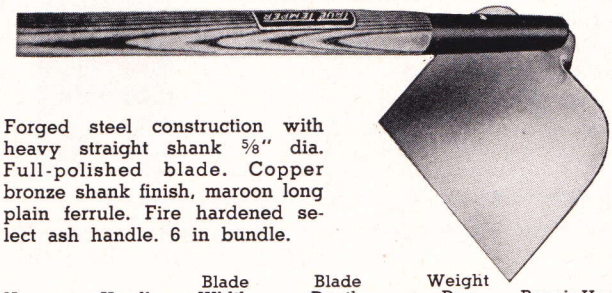

Forged steel construction with heavy straight shank 5/8" dia. Full-polished blade. Copper bronze shank finish, maroon long plain ferrule. Fire hardened select ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
SP85	5'	8"	5¾"	43 lbs.	TP5

'BRIAR EDGE'

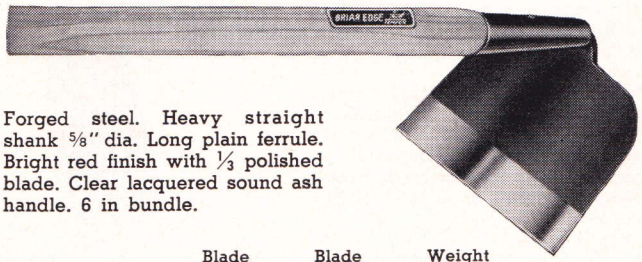

Forged steel. Heavy straight shank 5/8" dia. Long plain ferrule. Bright red finish with 1/3 polished blade. Clear lacquered sound ash handle. 6 in bundle.

No.	Handle	Blade Width	Blade Depth	Weight Doz.	Repair Handle
PSP85	5'	8"	5¾"	43 lbs.	BP5

PLANTERS EYE HOE
TRUE TEMPER AMERICAN FIELD PATTERN



Forged steel blade, ⅓ polished and ⅔ black enamel finish. Round eye. Furnished without handle. Packed 6 in carton.

No.	Blade Width	Blade Depth	Wt. Doz.
AE0H	7"	6½"	18 lbs.
AE1H	7½"	6¾"	19 lbs.
AE2H	8"	7"	21 lbs.

PLANTERS EYE HOE
TRUE TEMPER SCOVIL FIELD PATTERN

Forged steel blade with round eye. Blade is ⅓ polished, ⅔ black enamel finish. Furnished without handle. Packed 6 in carton.

No.	Blade Width	Blade Depth	Wt. Doz.
SE0	7"	6¼"	19 lbs.
SE1	7½"	6½"	21 lbs.
SE2	8"	6¾"	23 lbs.

GRUB OR SPROUTING EYE HOE
TRUE TEMPER

Forged steel narrow blade, ⅓ polished and ⅔ black enamel finish. Blade size 4½" wide, 7¾" deep. Round eye. Furnished with or without fire hardened ash handle.

G6-0 Without Handle. 6 in carton. Wt. doz. 19 lbs.

HG6-0 With 4½ ft. Handle. 6 heads in carton, 6 handles in bundle. Wt. doz. 39 lbs. Repair handle **TPA4½.**

ITALIAN GRAPE OR GRADING HOE
TRUE TEMPER

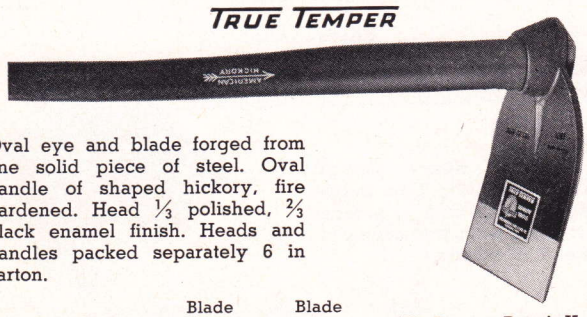

Oval eye and blade forged from one solid piece of steel. Oval handle of shaped hickory, fire hardened. Head ⅓ polished, ⅔ black enamel finish. Heads and handles packed separately 6 in carton.

No.	Handle	Blade Width	Blade Depth	Wt. Doz.	Repair Handle
IGH7	40"	7"	7⅜"	63 lbs.	**TGH40**

PROVIDENCE CLAM HOOK
TRUE TEMPER

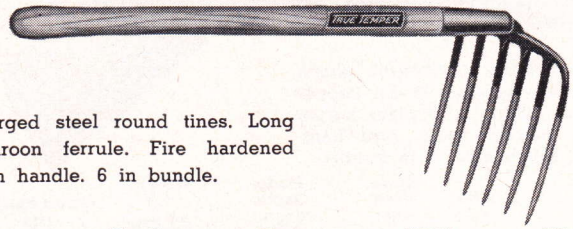

Forged steel round tines. Long maroon ferrule. Fire hardened ash handle. 6 in bundle.

No.	Handle	Tines	Width	Wt. Doz.
000PR	26"	Six 7"	7¼"	25 lbs.

IPSWICH PATTERN CLAM HOOK
TRUE TEMPER

Forged steel with diamond shape tines. ¾" round shank. Long ferrule, maroon finish. Handle is fire hardened ash. 6 in bundle.

No.	Handle	Tines	Width	Wt. Doz.
417	16"	Four 10"	7"	24 lbs.

STONE HOOK
TRUE TEMPER

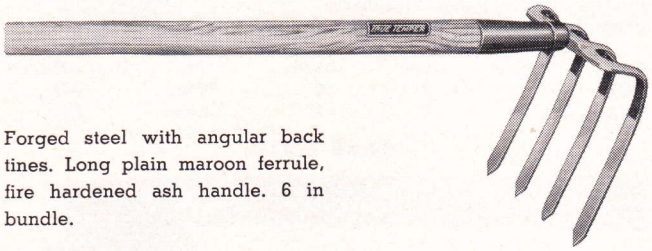

Forged steel with angular back tines. Long plain maroon ferrule, fire hardened ash handle. 6 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
SH4	5 ft.	Four 9"	7½"	56 lbs.	**TMP5**

FIRE FIGHTING HOE
TRUE TEMPER

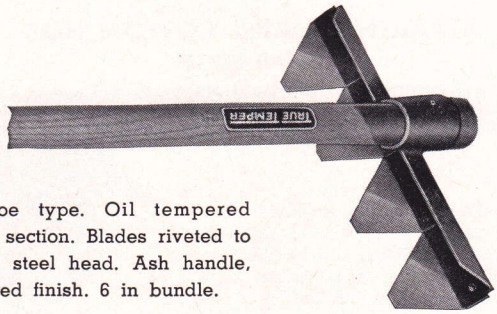

Eye hoe type. Oil tempered mower section. Blades riveted to welded steel head. Ash handle, lacquered finish. 6 in bundle.

No.	Handle	Width	Teeth	Wt. Doz.	Repair Handle
FR4E	4½ ft.	12"	Four	45 lbs.	**TPA4½**

TRUE TEMPER Hooks and Drags

SOUTHERN PATTERN POTATO HOOKS
TRUE TEMPER



Broad oval tines, bent head. Fire hardened ash handle. Long plain maroon ferrule. 6 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
Light Pattern					
4BOL	4½ ft.	Four 6¾"	6¼"	28 lbs.	**TR4½**
5BOL	4½ ft.	Five 6¾"	6½"	29 lbs.	**TR4½**
Heavy Pattern					
4BOH	4½ ft.	Four 7½"	7½"	48 lbs.	**TMP4½**
5BOH	4½ ft.	Five 7½"	7½"	50 lbs.	**TMP4½**

GOOSE NECK POTATO HOOKS
TRUE TEMPER



Forged round tines. Long plain maroon ferrule. Ash handle, fire hardened. 6 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
4GNR	4⅓ ft.	Four 7"	6"	27 lbs.	**TSR4⅓**
5GNR	4⅓ ft.	Five 7"	6¼"	29 lbs.	**TSR4⅓**

WASHINGTON COUNTY POTATO HOOK
TRUE TEMPER

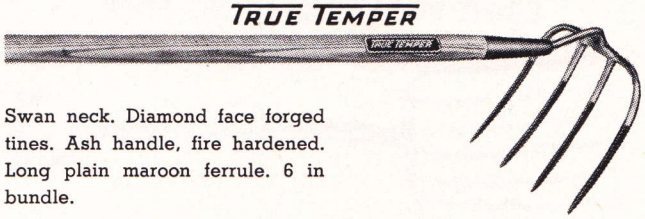

Swan neck. Diamond face forged tines. Ash handle, fire hardened. Long plain maroon ferrule. 6 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
4SNW	4⅓ ft.	Four 7"	7¼"	31 lbs.	**TSR4⅓**

BENT HEAD POTATO HOOKS
TRUE TEMPER

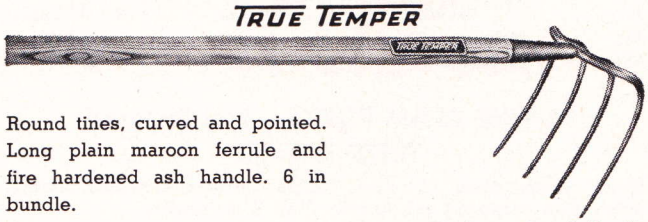

Round tines, curved and pointed. Long plain maroon ferrule and fire hardened ash handle. 6 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
4BHR	4⅓ ft.	Four 7"	6"	27 lbs.	**TSR4⅓**
5BHR	4⅓ ft.	Five 7"	6½"	28 lbs.	**TSR4⅓**
6BHR	4⅓ ft.	Six 7"	7"	30 lbs.	**TSR4⅓**

CALIFORNIA PATTERN POTATO HOOK
TRUE TEMPER

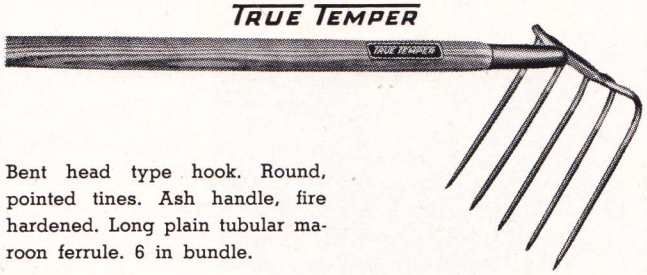

Bent head type hook. Round, pointed tines. Ash handle, fire hardened. Long plain tubular maroon ferrule. 6 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
5CP	5 ft.	Five 9"	8"	46 lbs.	**TMP5**

MANURE HOOKS
TRUE TEMPER

Forged steel, sharp pointed oval tines. Width at points 9". Long plain maroon ferrule. Fire hardened 5 ft. handle of select quality ash. 6 in bundle.

No.	Tines	Wt. Doz.	Repair Hdl.
M40	Four 9½"	40 lbs.	**TMP5**
M50	Five 9½"	42 lbs.	**TMP5**
M60	Six 9½"	44 lbs.	**TMP5**

CHOPPED HAY DRAG
TRUE TEMPER

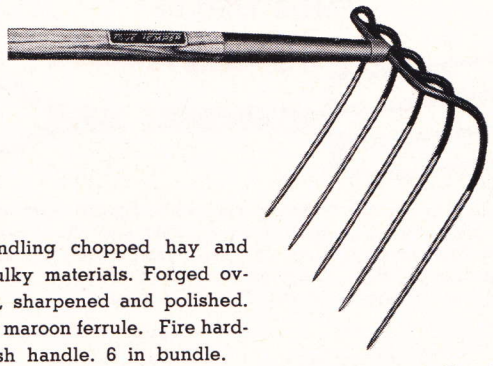

For handling chopped hay and light bulky materials. Forged oval tines, sharpened and polished. Tubular maroon ferrule. Fire hardened ash handle. 6 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
HD56	6 ft.	Five 14"	13"	65 lbs.	**TA6C**

HEAVY CORN DRAG
TRUE TEMPER

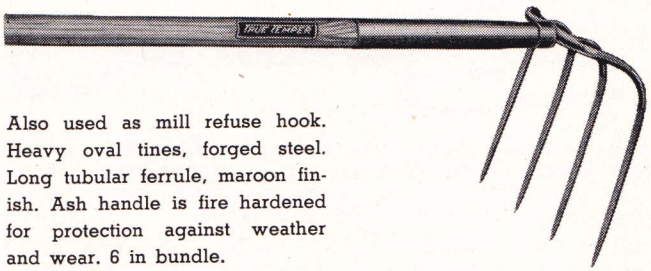

Also used as mill refuse hook. Heavy oval tines, forged steel. Long tubular ferrule, maroon finish. Ash handle is fire hardened for protection against weather and wear. 6 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
CD48	6 ft.	Four 8"	10¼"	54 lbs.	**TA6C**

PHOSPHATE DRAG
TRUE TEMPER

Heavy pattern forged steel head with flat tines 1" wide. Long tubular maroon ferrule, fire hardened ash handle. 6 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
4PD	6 ft.	Four 11"	9"	88 lbs.	**TPD6**

TRUE TEMPER Garden Digging Forks

LIGHTWEIGHT DIGGING FORK
TRUE TEMPER



Light pattern for general purpose home gardeners' use. 10¼" diamond back tines have polished faces. Approximate width 7¼". Long tubular ferrules with crystalite maroon finish. Fire hardened ash handles. Tied 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
LS	30" IDL—D top	46 lbs.	**TIMS**
LS4	4' long	46 lbs.	**TM4S**

ENGLISH PATTERN DIGGING FORK
TRUE TEMPER



English pattern for use in heavy clay soils. Square tines are more slender than regular spading forks, tapered and chisel pointed to penetrate hard ground. Tines 12" long, total width approximately 8". Tines face polished. Long tubular ferrule, crystalite maroon finish. Ash handle, fire hardened. Tied 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
EDS4D	30" Sturd E Top	60 lbs.	**TGSE**
EDS4L	4' long	60 lbs.	**TGS4**

MEDIUM WEIGHT DIGGING FORK
TRUE TEMPER



General purpose digging forks. Broad diamond back tines, tapered and diamond pointed. Tines 10¾" long. Polished faces. Approximate width 7¼". Long tubular ferrule, crystalite maroon finish. Ash handles, fire hardened. Tied 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
MSD	30" Sturd E Top	57 lbs.	**TGSE**
MSL	4' long	57 lbs.	**TGS4**

HEAVYWEIGHT DIGGING FORK
TRUE TEMPER



Built heavier than regular forks for hard use such as in stony ground. Four 11¼" diamond back tines, tapered and diamond pointed. Polished faces. Width approximately 7½". Tubular ferrules with crystalite maroon finish. Ash handles, fire hardened. Tied 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
HSD	30" Sturd E Top	60 lbs.	**TGSE**
HSL	4' long	60 lbs.	**TGS4**

LADIES' DIGGING FORK
TRUE TEMPER



Ideal for use by boys, ladies or in light garden soil. Four 8½" diamond back tines. Polished faces. Approximate width 6". Tubular ferrule with crystalite maroon finish. Fire hardened ash handle. Tied 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
B4D	30" JR steel D top	30 lbs.	**TBLDS**
B4L	4' long	30 lbs.	**TBL4S**

LOW-COST DIGGING FORK
'BRIAR EDGE' BY TRUE TEMPER



Forged steel head, tumbled finish. Tine length 10¼". Diamond back tines. Sound ash handle with smooth, clear lacquer finish. Fork head trimmed with rust resisting gold bronze. Ferrule, D top are lacquered bright red. Tied 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
POLD	30" IDL—D top	49 lbs.	**BGSI**

6-TINE POTATO DIGGING FORK
TRUE TEMPER



Round tines, 11" long. Spaced properly to hold potatoes while screening out dirt. Tines have blunt ends to avoid piercing potatoes. Tubular ferrules, crystalite maroon finish. Ash handles, fire hardened. Tied 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
P6D	32" IDL—D top	45 lbs.	**TIM32S**
P64	4' long	45 lbs.	**TM4S**

6-TINE CLAM FORKS—Not Pictured
TRUE TEMPER

Sharp pointed tines, 11" long. Tubular ferrules, crystalite maroon finish. Fire hardened ash handle. Tied 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
C6D	32" IDL—D top	45 lbs.	**TIM32S**
C6L	4' long	45 lbs.	**TM4S**

True Temper Tools are Nationally Advertised

month after month, year after year, in leading home and garden magazines. Pictured are 6 of dozens of magazines used.

TRUE TEMPER Hay Forks

REGULAR 3-TINE HAY FORKS

TRUE TEMPER BENT HANDLE PATTERN



Forged steel with polished oval tines, sharp pointed. Copper bronze head trim. Long tubular ferrule finished in crystalite maroon lacquer. Fire hardened handle of finest select ash. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
033½B	3½ ft.	Three 12"	7"	31 lbs.	**THB3½**
034B	4 ft.	Three 12"	7"	33 lbs.	**THB4**
034½B	4½ ft.	Three 12"	7"	35 lbs.	**THB4½**
035B	5 ft.	Three 12"	7"	37 lbs.	**THB5**
035½B	5½ ft.	Three 12"	7"	39 lbs.	**THB5½**

'BRIAR EDGE' BENT HANDLE PATTERN



Forged oval tines, tumbled finish and pointed. Long tubular ferrule finished in red. Sound ash handle, clear lacquer finish. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
P034B	4 ft.	Three 12"	7"	31 lbs.	**BHB4**
P034½B	4½ ft.	Three 12"	7"	33 lbs.	**BHB4½**
P035B	5 ft.	Three 12"	7"	35 lbs.	**BHB5**

TRUE TEMPER STRAIGHT HANDLE PATTERN



Forged oval tines, polished and sharp pointed. Copper bronze head trim, crystalite maroon long tubular ferrule. Select ash handle, fire hardened. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
034	4 ft.	Three 12"	7"	33 lbs.	**TH4**
034½	4½ ft.	Three 12"	7"	35 lbs.	**TH4½**
035	5 ft.	Three 12"	7"	37 lbs.	**TH5**
035½	5½ ft.	Three 12"	7"	39 lbs.	**TH5½**
036	6 ft.	Three 12"	7"	41 lbs.	**TH6**

'BRIAR EDGE' STRAIGHT HANDLE PATTERN



Forged oval tines, tumbled finish and sharp pointed. Long tubular ferrule, red finish. Clear-lacquered sound ash handle. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
P035	5 ft.	Three 12"	7"	35 lbs.	**BH5**
P035½	5½ ft.	Three 12"	7"	37 lbs.	**BH5½**

LONG 3-TINE HAY FORKS

TRUE TEMPER



Forged oval tines, polished and sharp pointed. Head trimmed in copper bronze. Bent handle. Long tubular ferrule finished in crystalite maroon. Fire hardened select ash handle. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
0133½B	3½ ft.	Three 13"	8½"	32 lbs.	**THB3½**
0134B	4 ft.	Three 13"	8½"	34 lbs.	**THB4**
0134½B	4½ ft.	Three 13"	8½"	36 lbs.	**THB4½**
0135B	5 ft.	Three 13"	8½"	38 lbs.	**THB5**

REGULAR 4-TINE HAY FORKS

TRUE TEMPER



Oval tines of forged steel, polished and pointed. Bent handle. Head trimmed in copper bronze. Long tubular ferrule finished in crystalite maroon. Select ash handle, fire hardened. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
044½B	4½ ft.	Four 12"	7¼"	36 lbs.	**THB4½**
045B	5 ft.	Four 12"	7¼"	38 lbs.	**THB5**

BOYS' OR LIGHT 3-TINE FORKS

TRUE TEMPER



Forged oval tines, polished and sharp pointed. Bent handle. Copper bronze head trim. Long tubular ferrule with crystalite maroon finish. Fire hardened handle of select ash. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
034YB	4 ft.	Three 10½"	6½"	26 lbs.	**THBL4**
034½YB	4½ ft.	Three 10½"	6½"	28 lbs.	**THBL4½**

ALFALFA OR CLOVER FORKS

TRUE TEMPER

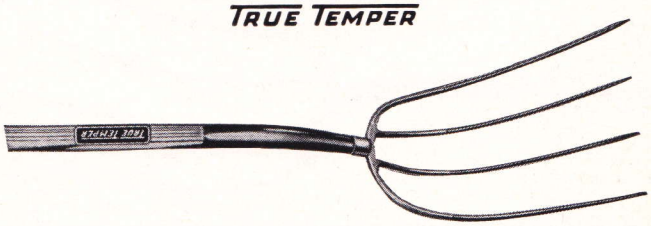

Forged tines, oval shape, polished and pointed. Bent handle. Copper bronze head trim. Long tubular ferrule with crystalite maroon finish. Fire hardened select ash handle. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
A0134	4 ft.	Four 13"	9⅜"	36 lbs.	**THB4**
A0134½	4½ ft.	Four 13"	9⅜"	38 lbs.	**THB4½**
A0135	5 ft.	Four 13"	9⅜"	40 lbs.	**THB5**

TRUE TEMPER Header and Barley Forks

MARSH HAY OR HEADER FORKS
TRUE TEMPER

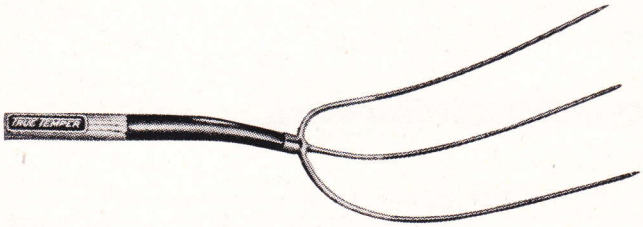

Forged long oval tines, polished smooth and pointed, properly dished and wide spaced. Copper bronze head trim. Crystalite maroon ferrule and fire hardened bent handle of select ash. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
03154½	4½ ft.	Three 15"	11"	35 lbs.	**THB4½**
03155	5 ft.	Three 15"	11"	37 lbs.	**THB5**
03155½	5½ ft.	Three 15"	11"	39 lbs.	**THB5½**

STANDARD 4-TINE HEADER FORKS
TRUE TEMPER

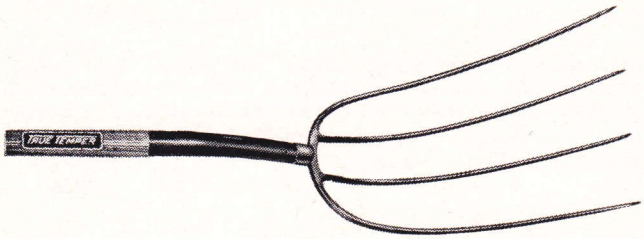

Bent handle pattern with forged tines smooth polished and pointed. Round shoulder. Head has copper bronze trim with ferrule finished in crystalite maroon. Fire hardened select ash handle. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
R0154	4 ft.	Four 15"	10¾"	42 lbs.	**TM4**
R0154½	4½ ft.	Four 15"	10¾"	44 lbs.	**TM4½**
R0155	5 ft.	Four 15"	10¾"	46 lbs.	**TM5**
R0155½	5½ ft.	Four 15"	10¾"	48 lbs.	**TM5½**

KANSAS 4-TINE HEADER FORKS
TRUE TEMPER DEEP DISH PATTERN

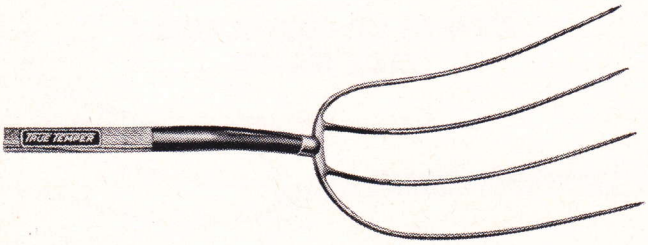

Forged steel with round shoulder and polished, pointed tines. Bent handle. Head trimmed in copper bronze. Crystalite maroon ferrule, and fire hardened select ash handle. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
K0154	4 ft.	Four 15"	11"	43 lbs.	**TM4**
K0154½	4½ ft.	Four 15"	11"	45 lbs.	**TM4½**
K0155	5 ft.	Four 15"	11"	47 lbs.	**TM5**

DAKOTA 4-TINE HEADER FORKS
TRUE TEMPER

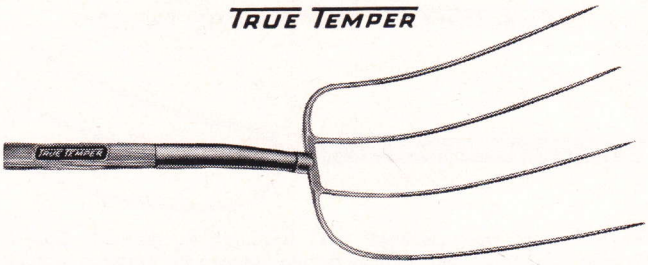

Large capacity with square shoulders. Bent handle. Forged oval tines, smooth polished and sharp pointed. Copper bronze head trim, maroon ferrule, fire hardened handle. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
D0164	4 ft.	Four 16"	12½"	44 lbs.	**TM4**
D0164½	4½ ft.	Four 16"	12½"	46 lbs.	**TM4½**
D0165	5 ft.	Four 16"	12½"	48 lbs.	**TM5**
D0165½	5½ ft.	Four 16"	12½"	50 lbs.	**TM5½**

BARLEY OR STRAW FORKS
TRUE TEMPER 4-TINE LONG OR D HANDLE

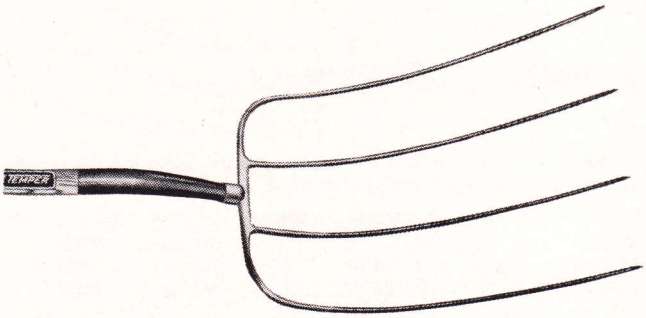

Extra large capacity for general utility. Square shoulders, bent handle. Slender oval forged tines are smooth polished. Head trimmed in copper bronze. Maroon ferrule. Fire hardened handle. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
B0184	4 ft. long	Four 18"	14¾"	45 lbs.	**TM4**
B0184½	4½ ft. long	Four 18"	14¾"	47 lbs.	**TM4½**
B0185	5 ft. long	Four 18"	14¾"	49 lbs.	**TM5**
B018D	34" IDL Dee	Four 18"	14¾"	47 lbs.	**TIM34**

For bails and braces add suffix "BB" to number — extra charge.

TRUE TEMPER 5-TINE LONG OR D HANDLE

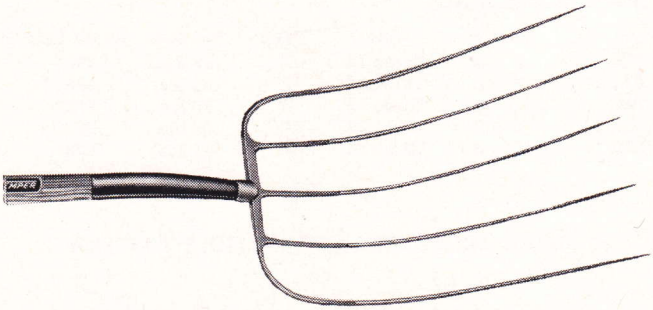

An extra large capacity, general utility fork with square shoulders. Forged slender tines, oval shape, are polished and sharp pointed. Head trimmed in copper bronze. Crystalite maroon ferrule. Fire hardened bent handle of select ash. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
B0504	4 ft. long	Five 18"	14"	52 lbs.	**TM4**
B0504½	4½ ft. long	Five 18"	14"	54 lbs.	**TM4½**
B0505	5 ft. long	Five 18"	14"	56 lbs.	**TM5**
B050D	34" IDL D Top	Five 18"	14"	52 lbs.	**TIM34**

For bails and braces add suffix "BB" to number — extra charge.

TRUE TEMPER Manure and Misc. Forks

STANDARD MANURE FORKS
TRUE TEMPER 4-TINE LONG OR D HANDLE

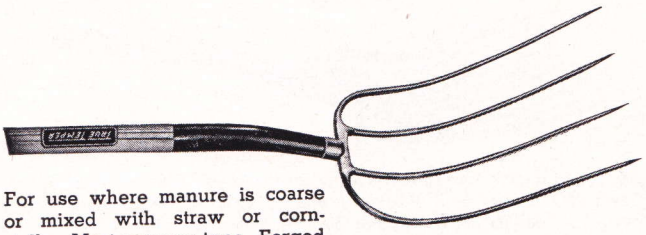

For use where manure is coarse or mixed with straw or cornstalks. Most common type. Forged oval tines, polished and sharp pointed. Bent handle. Copper bronze head trim and crystalite maroon tubular ferrule. Fire hardened handle of select ash. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
044	4 ft. long	Four 12¼"	10"	41 lbs.	TM4
044½	4½ ft. long	Four 12¼"	10"	43 lbs.	TM4½
04D	32" IDL D Top	Four 12¼"	10"	42 lbs.	TIM

'BRIAR EDGE' 4-TINE LONG OR D HANDLE

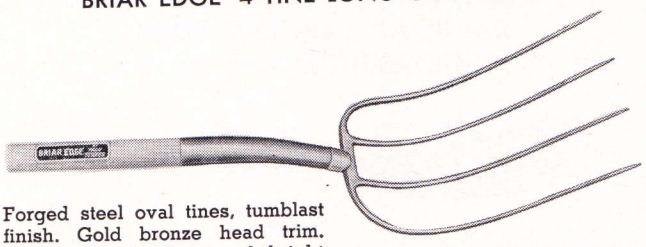

Forged steel oval tines, tumblast finish. Gold bronze head trim. Tubular ferrule lacquered bright red. Bent handle. Clear-finished ash handle. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
P044	4 ft. long	Four 12¼"	10"	38 lbs.	BM4
P044½	4½ ft. long	Four 12¼"	10"	40 lbs.	BM4½
P04D	32" IDL D Top	Four 12¼"	10"	38 lbs.	BIM

TRUE TEMPER 5-TINE LONG OR D HANDLE

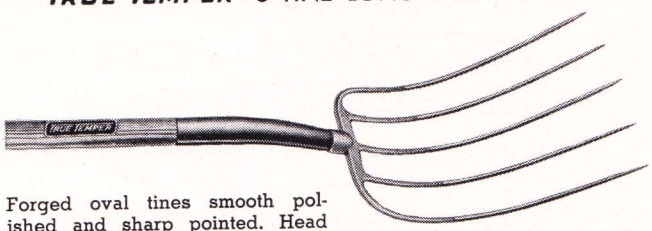

Forged oval tines smooth polished and sharp pointed. Head trimmed in copper bronze, with crystalite maroon finish on tubular ferrule. Select ash handle, fire hardened. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
054	4 ft. long	Five 12¼"	10"	42 lbs.	TM4
054½	4½ ft. long	Five 12¼"	10"	44 lbs.	TM4½
05D	32" IDL D Top	Five 12¼"	10"	43 lbs.	TIM

'BRIAR EDGE' 5-TINE LONG OR D HANDLE

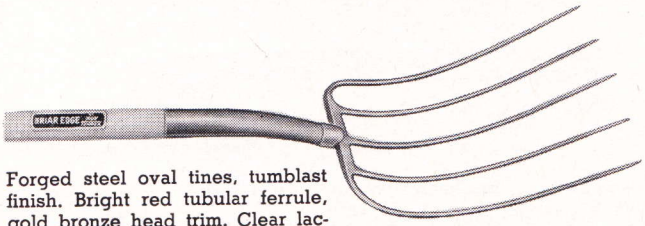

Forged steel oval tines, tumblast finish. Bright red tubular ferrule, gold bronze head trim. Clear lacquered ash handle. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
P054	4 ft. long	Five 12¼"	10"	41 lbs.	BM4
P054½	4½ ft. long	Five 12¼"	10"	43 lbs.	BM4½
P05D	32" IDL D Top	Five 12¼"	10"	41 lbs.	BIM

STANDARD MANURE FORKS
TRUE TEMPER 6-TINE LONG OR D HANDLE

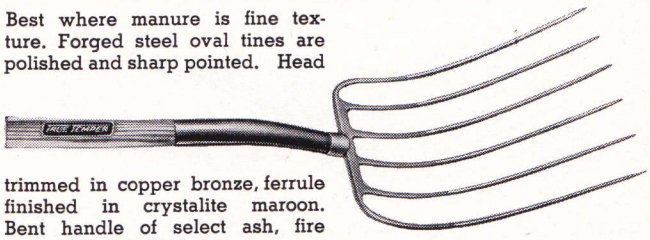

Best where manure is fine texture. Forged steel oval tines are polished and sharp pointed. Head trimmed in copper bronze, ferrule finished in crystalite maroon. Bent handle of select ash, fire hardened. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
064	4 ft. long	Six 12¼"	10"	45 lbs.	TM4
064½	4½ ft. long	Six 12¼"	10"	47 lbs.	TM4½
06D	32" IDL D Top	Six 12¼"	10"	45 lbs.	TIM

'BRIAR EDGE' 6-TINE LONG OR D HANDLE

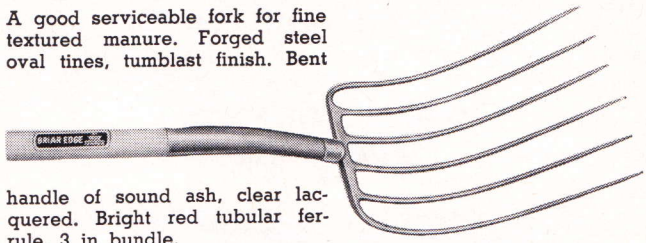

A good serviceable fork for fine textured manure. Forged steel oval tines, tumblast finish. Bent handle of sound ash, clear lacquered. Bright red tubular ferrule. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
P064	4 ft. long	Six 12¼"	10"	43 lbs.	BM4
P064½	4½ ft. long	Six 12¼"	10"	45 lbs.	BM4½
P06D	32" IDL D Top	Six 12¼"	10"	43 lbs.	BIM

ACME PATTERN MANURE FORK
TRUE TEMPER

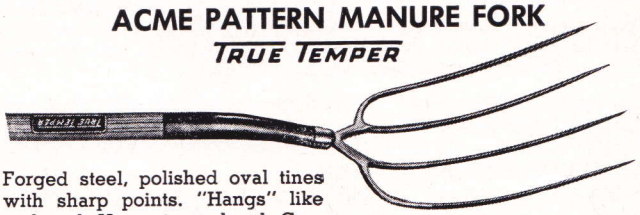

Forged steel, polished oval tines with sharp points. "Hangs" like a shovel. Very strong head. Copper bronze head trim, maroon ferrule, fire hardened bent ash handle. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
A044½	4½ ft.	Four 12"	9"	41 lbs.	TM4½

BALING PRESS 4-TINE FORK
TRUE TEMPER

Forged oval tines, polished and pointed. Bronze head trim, maroon ferrule. Straight handle of fire hardened ash. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
4BP	4 ft.	Four 7½"	9¼"	37 lbs.	TMP4C

FISH FORKS
TRUE TEMPER



Round tines, forged steel, polished and pointed. Maroon ferrule. Fire hardened ash handle. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
3F4	4 ft. straight	Three 8"	4¾"	26 lbs.	TH4
3F4½	4½ ft. straight	Three 8"	4¾"	28 lbs.	TH4½
2F4	4 ft. straight	Two 8"	4¾"	23 lbs.	TH4
2F4½	4½ ft. straight	Two 8"	4¾"	25 lbs.	TH4½
1FB4	4 ft. bent	One 5½"	----	21 lbs.	THB4
1FB4½	4½ ft. bent	One 5½"	----	23 lbs.	THB4½

TRUE TEMPER Heavy Forks and Hoes

COKE FORKS
TRUE TEMPER

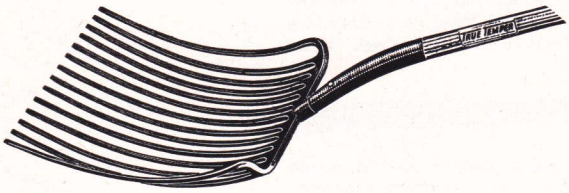

Head and shank forged from high carbon steel, heat treated and tempered. Diamond shape tines have black finish. 30" bent handle of fine quality ash with fire hardened finish. Fitted with TT steel D tops. Tubular maroon ferrule. 3 in bundle.

No.	Tines		Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
710	Ten	17"	15"	1¼"	96 lbs.	TTC
712	Twelve	17"	18"	1¼"	107 lbs.	TTC
712½	Twelve	16"	16"	1"	109 lbs.	TTC
714	Fourteen	17"	20¼"	1¼"	122 lbs.	TTC

COAL SCOOP FORKS
TRUE TEMPER



Forged steel head and shank. Round tines have black finish. Heat treated and tempered for maximum strength and resilience. 30" bent handle of fine quality ash, fire hardened. Fitted with TT steel D tops. Tubular ferrule. 3 in bundle.

No.	Tines		Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
1010R	Ten	15"	14"	1¼"	83 lbs.	TTC
1012R	Twelve	15"	13½"	⅞"	92 lbs.	TTC
1012½R	Twelve	16"	15"	1"	98 lbs.	TTC
1014R	Fourteen	15"	14"	¾"	100 lbs.	TTC

COAL FORKS
TRUE TEMPER



Forged steel head and shank. Diamond shape tines have black finish. 30" bent handle of fine quality ash, fire hardened. Fitted with TT steel D tops. Tubular ferrule. 3 in bundle.

No.	Tines	Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
812	Twelve 16"	16"	1"	102 lbs.	TTC

ALL STEEL ASPHALT FORK
TRUE TEMPER

Forged steel head and shank. Shank is driven into handle with metal plugs riveted through. 30" tubular steel bent handle, iron D top. 3 in bundle.

No.	Tines	Width	Btwn. Tines	Wt. Doz.
AF10	Ten 13½"	9½"	¾"	86 lbs.

STONE OR BALLAST FORKS
TRUE TEMPER 'BULLDOG'

Head and shank forged from high carbon steel. Square tines, black finish. 30" bent handle of fine quality ash, fire hardened. Fitted with TT steel D tops. Tubular ferrule. 3 in bundle.

No.	Tines		Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
98S	Eight	13½"	10½"	1⅛"	83 lbs.	TTC
100S	Ten	14"	13"	1⅛"	97 lbs.	TTC
100SB	Ten	13½"	8½"	⅝"	80 lbs.	TTC
100SC	Ten	13½"	9½"	¾"	80 lbs.	TTC
100SCS	Ten	11"	9½"	¾"	79 lbs.	TTC
102S	Twelve	13½"	11½"	¾"	87 lbs.	TTC
104S	Fourteen	13½"	12"	⅝"	92 lbs.	TTC

RAILROAD TAMPING FORK
TRUE TEMPER 'BULLDOG'

Specially designed for tamping. Forged steel head and shank. Square tines, black finish. Tines are only slightly curved and the handle slightly bent. 32" bent handle of fine quality ash, fire hardened. Fitted with TT steel D tops. Tubular ferrule. 3 in bundle.

No.	Tines	Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
100STC	Ten 11"	9½"	¾"	79 lbs.	TTC32

MORTAR HOES
TRUE TEMPER PLAIN BLADE

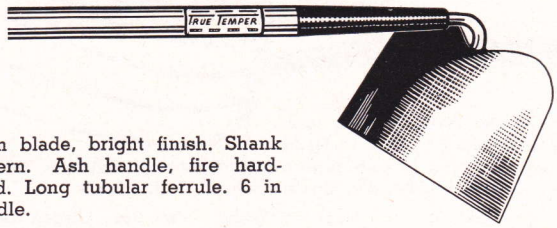

Plain blade, bright finish. Shank pattern. Ash handle, fire hardened. Long tubular ferrule. 6 in bundle.

No.	Handle	Width	Depth	Wt. Doz.	Repair Handle
M9	5½ ft.	9"	6"	48 lbs.	TA5½
M10	5½ ft.	10"	6"	49 lbs.	TA5½

TRUE TEMPER MIXER BLADE

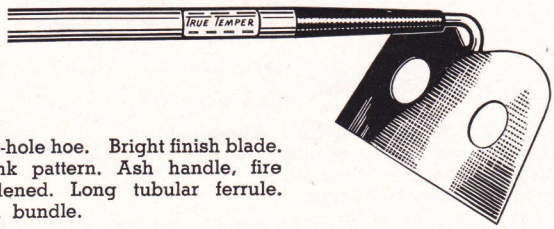

Two-hole hoe. Bright finish blade. Shank pattern. Ash handle, fire hardened. Long tubular ferrule. 6 in bundle.

No.	Handle	Width	Depth	Wt. Doz.	Repair Handle
M29	5½ ft.	9"	6"	47 lbs.	TA5½
M210	5½ ft.	10"	6"	48 lbs.	TA5½

TRUE TEMPER Heavy Steel Forks

HEAVY MANURE OR MILL FORKS

TRUE TEMPER



Also designed as a pulp, shaving fork, or handling frozen ensilage. Forged steel construction. 30" bent ash handle, fire hardened. Fitted with TT steel D tops. Tubular ferrule. 3 in bundle.

No.	Tines	Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
	Oval Tines, Natural Finish				
163	Street 4 - 15"	11"	3⅛"	55 lbs.	**TTCP**
306	Shaving 6 - 18"	15"	2¾"	67 lbs.	**TTC**
	Diamond Tines, Natural Finish				
155	Street 5 - 14"	10½"	2"	65 lbs.	**TTC**
157	Street 5 - 16"	11½"	2¼"	70 lbs.	**TTC**
	Heavy Oval Tines, Natural Finish				
163P	Pulp 4 - 15"	10½"	3¼"	53 lbs.	**TTCP**

SCOOP SHAPED COTTON SEED FORKS

TRUE TEMPER



Head and shank forged from high carbon steel. Black finish diamond shape tines. 30" bent ash handle, fire hardened. TT steel D tops. Tubular ferrule. 3 in bundle.

No.	Tines	Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
410S	Ten 16"	14"	1¼"	84 lbs.	**TTC**
412S	Twelve 16"	17½"	1¼"	107 lbs.	**TTC**

Can be furnished with Sturd E steel D tops, add suffix "E".

SCOOP SHAPED VEGETABLE FORKS

TRUE TEMPER



Forged steel head and shank. Black oval tines with flattened points. 30" bent ash handle, fire hardened. TT steel D tops. Tubular ferrule. 3 in bundle.

No.	Tines	Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
910	Ten 15½"	14"	1¼"	85 lbs.	**TTC**
912	Twelve 16"	17½"	1¼"	95 lbs.	**TTC**

SCOOP SHAPED BEET FORK

TRUE TEMPER



Black round forged steel tines with ball points. 32" bent ash handles, fire hardened. TT steel D tops. Tubular ferrule. 3 in bundle.

No.	Tines	Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
037S	Seven 16½"	13¾"	2"	80 lbs.	**TTB**

ENSILAGE, MAIZE, KAFFIR CORN FORKS

TRUE TEMPER



Forged steel oval tines. Turned up outside tines, natural finish. 30" bent ash handle, fire hardened. Fitted with TT steel D tops. Tubular ferrule. 3 in bundle.

No.	Tines	Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
508	Eight 16"	13"	1½"	72 lbs.	**TTC**
510	Ten 16"	15½"	1½"	78 lbs.	**TTC**

For 4 ft long handle, add suffix "L".

OYSTER FORK—Not Pictured

Round forged steel tines. Outside tines turned up. Pinch points. 42" bent ash handle, fire hardened. Fitted with TT steel D top. Galvanized tubular ferrule and cap. 3 in bundle.

No.	Tines	Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
1510R	Ten 16"	13"	1⅛"	96 lbs.	**TTC42G**

EIGHT-TINE CHAFF FORK

TRUE TEMPER



Scoop shaped forged steel construction. Oval tines. Space between tines at center 2¼". Long bent handle of fine quality ash, fire hardened finish. Tubular ferrule. 3 in bundle.

No.	Handle	Tines	Width	Wt. Doz.	Repair Handle
C1717L	4½'	Eight 17"	18"	71 lbs.	**THCF4½**

EIGHT-TINE CHOPPED HAY FORK

TRUE TEMPER



Forged steel head and shank. Polished oval tines. Outside tines turn up. 36" bent ash handle, fire hardened. Fitted with TT steel D tops. Tubular ferrule. 3 in bundle.

No.	Tines	Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
CH8D	Eight 19"	19"	2⅜"	72 lbs.	**TIM36**

For bails and braces add suffix "BB" to number — extra charge.

STONE PICKER FORK

TRUE TEMPER



Oval tines heat treated and tempered. Black finish. 4 ft. long bent ash handle, fire hardened. Tubular ferrule. 3 in bundle.

No.	Tines	Width	Btwn. Tines	Wt. Doz.	Rep. Hdl.
6L	Six 8"	7¼"	1¼"	31 lbs.	**THBL4S**

TRUE TEMPER Garden and General Shovels

LIGHTWEIGHT GARDEN SHOVEL
TRUE TEMPER 'DYNALITE'



Special flat edge pattern for light spading, edging and cultivating. Extra light weight. Taper forged blade and socket distributes the metal where the strain is greatest. Heat treated. Forge finish. Spring tension socket. Fire hardened ash handle. 6 in bundle.

No.	Blade	Handle	Wt. Doz.	Repair Handle
DGS	6⅛" x 9½"	41" long	34 lbs.	T42F

GARDEN SHOVEL
TRUE TEMPER 'BANTAM'

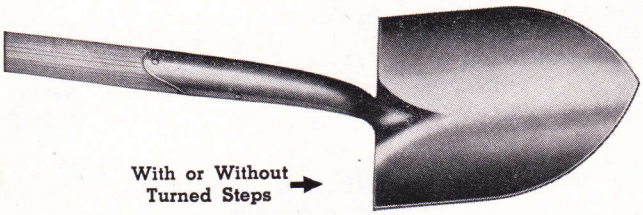

Ideal general purpose home shovel. Blade, solid shank, and socket taper forged for great strength and light weight. Forge finish blade. Spring tension socket. Fire hardened ash handle. 6 in bundle.

No.	Size	Blade	Handle	Wt. Doz.	Repair Handle
LB0	0	8" x 10¼"	40" long	46 lbs.	T38F
LB00	00	7" x 9½"	40" long	42 lbs.	T38F

For turned step model, add suffix "T" to number.

GARDEN AND FORESTRY SHOVEL
'BRIAR EDGE' BY TRUE TEMPER

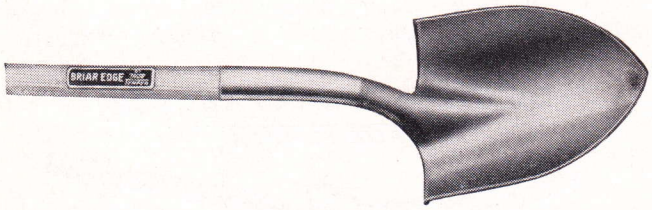

Light weight and small size, yet sturdy for the home gardener. Also frequently used by the Forest Service. Improved design with perfect lift and balance. Carbon steel blade. Heat treated. Black finish with bright polished socket. Rolled shoulders. Northern white ash handle. 6 in a bundle.

No.	Blade	Handle	Wt. Doz.	Repair Handle
HLO	8" x 10"	40" long	48 lbs.	B40H

For 48" handle, add suffix "L" to number.

SMALL SIZE FLORAL SHOVEL
TRUE TEMPER



Suitable for planting shrubbery, transplanting, digging bulbs and similar light digging. Forged steel blade and shank. Turned step. Tubular ferrule finished in crystalite maroon. Copper bronze blade trim, polished point. Ash handle, fire hardened. 6 in bundle.

No.	Blade	Handle	Wt. Doz.	Repair Handle
FSD	5⅞" x 8"	30" JR Steel D	30 lbs.	TBLD
FS3½	5⅞" x 8"	42" long bent	30 lbs.	TBL3½

NEW SMALL SIZE GARDEN SHOVEL
TRUE TEMPER



Small size garden shovel of hollow back construction designed especially for the lady gardener or light digging. Heat treated blade, ½ polished face only, tumblast finished back. Socket and top of blade copper bronze. Fire hardened ash handle. 6 in bundle.

No.	Blade	Handle	Wt. Doz.	Repair Handle
HGD	6" x 8½"	30" JR Steel D	34 lbs.	TJH
HGL	6" x 8½"	42" long	34 lbs.	T42HS

ALUMINUM ALL-PURPOSE SHOVEL
TRUE TEMPER

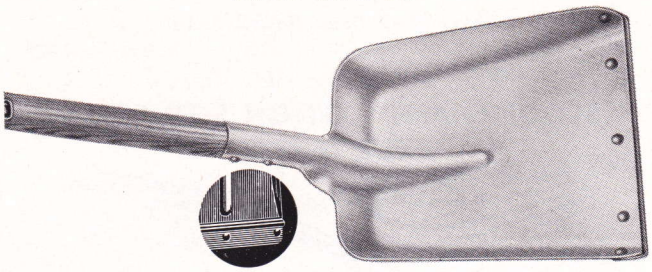

A new lightweight shovel that saves lifting and reduces fatigue . . . ideal as an all-purpose, clean-up shovel for household use. Thicker aluminum alloy blade has steel wear strip riveted on back to add long life and extra strength. Smooth ash handle, fire hardened. Bright red wear strip and D grip. 3 in bundle.

No.	Blade	Handle	Wt. Doz.	Repair Handle
50A	11¼" x 12½"	32" Steel D	40 lbs.	SS32D
51A	11¼" x 12½"	48" long	41 lbs.	SS48

GENERAL PURPOSE STEEL SHOVELS
TRUE TEMPER 'LITTLE GIANT'

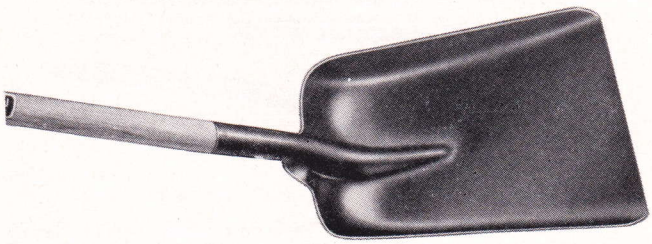

Strong one-piece blade and socket construction. Blades hot formed from high carbon 16 gauge steel; shaped for all-purpose use. Sanded clear ash handles. Overall black blade and socket. 6 in bundle.

No.	Blade	Handle	Wt. Doz.	Repair Handle
50	11½" x 13¾"	32" Steel D	55 lbs.	SS32D
51	11½" x 13¾"	46½" long	56 lbs.	SS48

Illustrations and descriptions of TRUE TEMPER'S full line of SHOVELS - SPADES - SCOOPS on pages 38 through 51.

TRUE TEMPER Garden Spades

LIGHTWEIGHT GARDEN SPADE
TRUE TEMPER 'DYNALITE'



Extra light weight. Taper forged blade and socket distributes metal where strain is greatest. Heat treated. Spring tension socket. Square points. Fire hardened ash handle. 6 in bundle.

No.	Size	Blade	Handle	Wt. Doz.	Repair Handle
SD	2	7¼" x 12"	TT 30" Steel D Top	51 lbs.	**TT29F**
SDL	2	7¼" x 12"	49" long	47 lbs.	**T48F**

LONG BLADE GARDEN SPADE
TRUE TEMPER



Ideal for digging, transplanting in all types of soil. Blade and socket formed in one piece from heavy gauge high carbon steel, heat treated. Turned step. Tapered blade has sharpened edge, tumbled finish, with red trim. 11-inch polished socket. Fire hardened ash handle. 6 in bundle.

No.	Blade	Handle	Wt. Doz.
GS12	5½" x 12"	Sturd-E D Top	49 lbs.
GS14	5½" x 14"	Sturd-E D Top	53 lbs.

GARDEN SPADE
'BRIAR EDGE' BY TRUE TEMPER



Hollow back spade. Carbon steel blade. Heat treated. Black finish. Polished socket. Rolled shoulder. Ash handle. 6 in bundle.

No.	Blade	Handle	Wt. Doz.	Repair Handle
SH	7" x 12"	27" Sturd-E D Top	51 lbs.	**BEH**
SHL	7" x 12"	47" long	49 lbs.	**B48H**

GARDEN SPADE
TRUE TEMPER 'BANTAM'



Square point. Taper forged blade and socket. Distributes the metal where strain is greatest. Heat treated. Hard forge finish. Spring tension socket. Fire hardened ash handle. 6 in bundle.

No.	Size	Blade	Handle	Wt. Doz.	Repair Handle
SB	2	7¼" x 12"	27" Sturd-E Steel D Top	52 lbs.	**TE24F**
SBL	2	7¼" x 12"	47" long	52 lbs.	**T44½F**

IOWA PATTERN GARDEN SPADE
TRUE TEMPER 'BANTAM'



Taper forged blade and socket. Distributes the metal where the strain is greatest. Heat treated. Hard forge finish. Spring tension socket. Fire hardened ash handle. 6 in bundle.

No.	Size	Blade	Handle	Wt. Doz.	Repair Handle
ISB	2	6" x 5¾" x 12½"	30" Sturd-E Steel D Top	50 lbs.	**TE27F**
ISBL	2	6" x 5¾" x 12½"	47" long	49 lbs.	**T44½F**

For riveted steps add suffix "T" to number.

CURVED BLADE GARDEN SPADE
TRUE TEMPER 'BANTAM'



Taper forged blade and socket. Distributes the metal where the strain is greatest. Heat treated. Hard forge finish. Spring tension socket. Fire hardened ash handle protects against weather, wear, and vermin. 6 in bundle.

No.	Size	Blade	Handle	Wt. Doz.	Repair Handle
HGS	0	4½" x 5½" x 11½"	27" Sturd-E Steel D Top	44 lbs.	**TE24F**

FLAT BLADE NURSERY OR GARDEN SPADE
TRUE TEMPER 'BANTAM'



Flat blade pattern. Ideal for use in greenhouses and nurseries. Specially adapted for use in hard ground. Taper forged blade and socket. Distributes the metal where the strain is greatest. Heat treated. Hard forge finish. Spring tension socket. Fire hardened ash handle. 6 in bundle.

No.	Size	Blade	Handle	Wt. Doz.	Repair Handle
HGSF	0	7" x 7" x 10½"	27" Sturd-E Steel D Top	46 lbs.	**TE24F**

AUTO CAMPERS' SPADE
TRUE TEMPER

Short and compact for easy carrying in auto. Also handy for many uses around the home. Turned step for easier digging. Blade and shank forged from steel. Plain maroon ferrule. Copper bronze blade trim, polished point. 16" short, straight ash handle, fire hardened. 6 in bundle.

No.	Blade	Handle	Wt. Doz.	Repair Handle
AFSD	5⅞" x 8"	16" JR Steel D Top	22 lbs.	**THSD**

TRUE TEMPER Post Hole Diggers and Augers

HERCULES DIGGER
TRUE TEMPER



Designed for hard soils. Tough, high carbon blades are securely riveted to strong, well designed steel frames. Hinge and steel bolt give rigid, strong, yet easy to operate construction. All metal parts are protected with red enamel. Select grade, fire hardened, ash handles. Shaped with square shoulders at frame, double bolted for greatest strength. Tied two in bundle.

No.	Blade Size	Handle Length	Weight Each	Repair Handle
33	9½" x 6½"	4 ft.	10½ lbs.	PDH4
33-5	9½" x 6½"	5 ft.	11 lbs.	PDH5
33-6	9½" x 6½"	6 ft.	11¼ lbs.	PDH6
33-7	9½" x 6½"	7 ft.	11¾ lbs.	PDH7
33-8	9½" x 6½"	8 ft.	12 lbs.	PDH8
33-9	9½" x 6½"	9 ft.	12¼ lbs.	PDH9

Repair blade **No. 33B** Repair casting **No. 33C**

ATLAS DIGGER
TRUE TEMPER



Designed for all types of heavy or gravel soils. Strong, high carbon blades are securely riveted to well designed, steel frames. Double hinge and steel bolt give firm but smoother operation construction. All metal parts are protected with red enamel. Fire hardened, shaped handles with square shoulders are double bolted to frame. Tied two in bundle.

No.	Blade Size	Handle Length	Weight Each	Repair Handle
35	9" x 5½"	4 ft.	10 lbs.	PDH4
35-5	9" x 5½"	5 ft.	10½ lbs.	PDH5
35-6	9" x 5½"	6 ft.	11 lbs.	PDH6
35-7	9" x 5½"	7 ft.	11¼ lbs.	PDH7
35-8	9" x 5½"	8 ft.	11½ lbs.	PDH8
35-9	9" x 5½"	9 ft.	12 lbs.	PDH9

Repair blade **No. 35B** Repair casting **No. 35C**

PERFECTION DIGGER
TRUE TEMPER



Designed for all sandy, loamy or light soils. Blades are shaped to hold full loads of light soils, without spilling. Two identical, one-piece high carbon steel blades are accurately hinged by a strong steel bolt. Red enamel protects all steel parts. Shaped, fire hardened ash handles with square shoulders are bolted for greatest strength. Tied two in bundle.

No.	Blade Size	Handle Length	Weight Each	Repair Handle
34	10½" x 7"	4 ft.	8¼ lbs.	PDH4
34-5	10½" x 7"	5 ft.	8¾ lbs.	PDH5
34-6	10½" x 7"	6 ft.	9 lbs.	PDH6
34-7	10½" x 7"	7 ft.	9¼ lbs.	PDH7
34-8	10½" x 7"	8 ft.	9¾ lbs.	PDH8
34-9	10½" x 7"	9 ft.	10 lbs.	PDH9

Repair blade **No. 34B**

PROFESSIONAL DIGGER
TRUE TEMPER

For ease and speed of operation, the PROFESSIONAL has no equal for use by fence contractors, highway departments, outdoor advertising companies or railroads. It was built to meet the need for a better and more powerful digger for all types of soil. A strong, chisel type, high carbon blade securely bolted to a strong, round design, straight fire hardened handle loosens the soil. The high carbon bucket blade operated by a lever scoops up a full load. Red enamel protects metal parts. Tied two in bundle.

No.	Will Dig Hole	Length Overall	Weight Each	Repair Handle
1PD	34"	4' 10"	16 lbs.	1H
2PD	46"	5' 10"	17½ lbs.	2H

Repair Parts:

No.	Part Description
PDB	Straight Repair Blade for Nos. 1 & 2 Post Hole Diggers
PDBS	Scoop Repair Blade for Nos. 1 & 2 Post Hole Diggers
PDC	Straight Blade Repair Casting for Nos. 1 & 2 Post Hole Diggers
PDCS	Scoop Blade Repair Casting for Nos. 1 & 2 Post Hole Diggers
PD1R	Repair Lever Connecting Rod for No. 1 Post Hole Diggers
PD2R	Repair Lever Connecting Rod for No. 2 Post Hole Diggers
PDLH	Repair Lever Handle for Nos. 1 & 2 Post Hole Diggers

IWAN AUGER
TRUE TEMPER

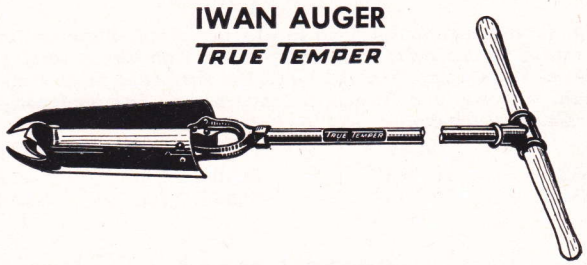

Popular "Iwan" pattern. Fast cutting and easy to use. Extra large cutting surface makes round, clean holes in wet or dry soil. Easily emptied—no suction when removing from soil. Takes up smaller stones in graveled soil. 13 gauge high carbon steel blades. Half inch pipe upright on 2" size, ¾" pipe on sizes 3" to 10" inclusive. Blue enamel protects all metal parts. Complete with hardwood cross handle. Tied 3 in a bundle.

No.	Size	Length Overall	Wt. Each	Bottoms Only
W2	2"	3¾ ft.	5½ lbs.	W2B
W3	3"	4 ft.	6½ lbs.	W3B
W4	4"	4 ft.	7 lbs.	W4B
W5	5"	4 ft.	7½ lbs.	W5B
W6	6"	4 ft.	8½ lbs.	W6B
W7	7"	4 ft.	8¾ lbs.	W7B
W8	8"	4 ft.	9 lbs.	W8B
W9	9"	4 ft.	9½ lbs.	W9B
W10	10"	4 ft.	11 lbs.	W10B

ADJUSTABLE AUGER
TRUE TEMPER

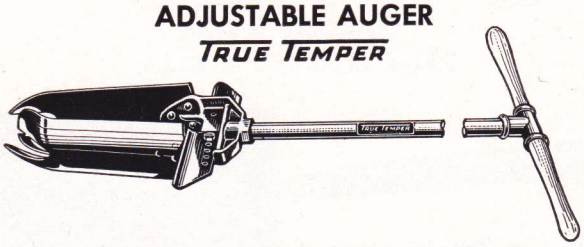

"Iwan" pattern. Fast cutting and easy to use. Tool feeds itself into soil with slight downward pressure. Big cutting surface makes round, clean cut holes in wet or dry soil. Easily empties—no suction when removing from soil. 13 gauge high carbon steel blades. Complete with ¾" pipe upright and hardwood cross handle. Blue enamel protects all metal parts. Tied 2 in a bundle.

No.	Size	Length Overall	Weight Each
WA8	4 in. to 8 in.	4 ft.	9 lbs.
WA15	8 in. to 15 in.	4 ft.	16 lbs.

No. S18 *True Temper* Shear Merchandiser

FREE DISPLAY STAND with 18 SHEARS

COMPACT—displays all 18 shears in 18" x 6¼" area.

STURDY—heavy gauge wire construction for permanent use. Welded joints.

VERSATILE—sets on counter, on shelf, or in window; or hangs on peg board or wall from two hooks.

EFFECTIVE—designed to encourage self service. Speeds turnover.

COLORFUL—rich green and white sign contrasts beautifully with tool colors.

CLEAN—neat appearance avoids cluttered look.

PORTABLE—can be carried from one display area to another if desirable.

SINGLE UNIT—shipped assembled in one carton with tools.

SAFE—won't tip over, even loaded one side only.

SETS UP INSTANTLY. Open easel back and push down wire support.
CONVERTS TO WALL DISPLAY. Hang on pegboard on wall hooks from top corner openings.

Dealer's Cost.. regular price of 18 Shears only. Display Stand is FREE.

Selling Price... suggested retail prices based on 50% mark-up.

Full Profit ..... no gimmicks — no hidden costs.

The **No. S18** True Temper Shear Merchandiser is available from True Temper wholesalers. It provides dealers with a logical selection of the three most basic types of garden shears at a low investment. These fast selling True Temper tools, attractively displayed, assure quickest turnover and full profits.

SELECTION CONSISTS OF THESE FAST-SELLING SHEARS — THE 3 MOST BASIC TYPES



6 each No. TD HEDGE SHEARS

America's most popular hedge shear. 8½" forged steel blades, hardened, tempered and shock tested. Lower blade serrated. Dynamic hinge nut and bolt adjust easily, won't loosen. Fire-hardened oval handles with crystalite maroon ferrules.



6 each No. 22 GRASS SHEAR

Sensational new shear has a true draw cut slicing action which cuts all types of grass. Long, wide-opening blades are hollow ground to hold a keen edge. Read about the many exclusive features of this amazing tool on page 30.



6 each No. 250 PRUNING SHEAR

Deluxe design with powerful draw cut action. Replaceable brass anvil. Beautifully chrome plated. Hinge nut and bolt provide positive adjustment, won't loosen. Fully tempered blades, slide action thumb catch. Handles shaped for positive grip and comfort.

No. S18— 18 Garden Shears and free Display Stand—all packed in one carton with retail price list. Weight per carton 27 lbs. Order from your True Temper wholesaler.

TRUE

DRAW-CUT ACTION MAKES THIS THE MOST EFFICIENT GRASS SHEAR EVER BUILT

No. 22 Garden Club Grass Shears

Dealers everywhere are excited about No. 22 Shears sales. No wonder – true, draw-cut action shears off grass quicker and cleaner. Cutting pressure increases as grip is tightened. Lets you cut even toughest grass with just a light squeeze.

Less tiring, more comfortable to use. Light in weight. Lower grip has extra clearance to avoid scraped knuckles, and protective sheath to stop blisters.

Hollow-ground blades stay sharp longer. Convenient thumb latch locks shears closed while not in use.

Streamlined design with bright plated handles. Packed six in colorful display carton to catch your customers' eyes.

Don't miss the big spring and summer business these shears can bring you. Order now from your True Temper Wholesaler!

TRUE TEMPER® YOU CAN LOOK TO TT FOR LEADERSHIP

TRUE TEMPER Grass Shears and Pruners

DRAW CUT GRASS SHEAR
TRUE TEMPER



A new design lightweight shear has slicing action which cuts all types of grass. Draw cut action—upper blade under constant pressure draws back and over lower blade. Hollow ground blades hold keen edge, open wider. Sharpen without disassembly by crossing top blade over lower blade stop. Natural grip handles have extra clearance to avoid scraped knuckles. Bright plated finish. Bright red composition grip on lower handle. Handy catch locks shears in closed position. Packed in attractive display carton.

No.	Length	Wt. Doz.	Packed
22	13"	12 lbs.	6 in carton

SQUEEZE TYPE GRASS SHEAR
'BRIAR EDGE' BY TRUE TEMPER



A popular priced shear with easy squeeze type action. Small size is ideal for ladies. Pressed steel handles. Tempered blades. Finished in fire engine red.

No.	Length	Wt. Doz.	Packed
66	10¼"	8 lbs.	6 in box 36 in carton

DELUXE SCISSOR TYPE GRASS SHEAR
TRUE TEMPER



Deluxe shear of popular design. Will cut heavy tough grass. Forged steel blades are fully tempered and hollow ground. Mirror polished. Positive spring latch. Glossy jet black handles.

No.	Length	Wt. Doz.	Packed
55	12"	11 lbs.	1 in box 12 in carton

LOW PRICED SCISSOR TYPE GRASS SHEAR
'BRIAR EDGE' BY TRUE TEMPER



Popular design of sturdy construction. Forged steel blades, tempered, hollow ground and polished. Positive spring clip. Bright red handles.

No.	Length	Wt. Doz.	Packed
44	12"	11 lbs.	6 in box 36 in carton

'TRUE KUT' DELUXE PRUNER
TRUE TEMPER

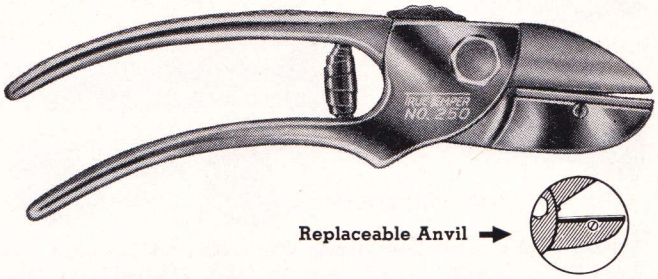

Deluxe pruner with powerful draw cut action. Replaceable brass anvil. Chrome plated. Volute spring for smooth action. Dynamic hinge bolt and nut provides positive adjustment. Improved blade design, fully tempered. Slide action thumb catch.

No.	Length	Wt. Doz.	Packed
250	8"	9 lbs.	1 in box 24 in carton

'DYNACUT' ALL-PURPOSE PRUNER
TRUE TEMPER



A favorite all-purpose pruner. Powerful anvil type. Coil spring for smooth action. Dynamic hinge bolt and nut. Non-slip corrugated handle. Slide action thumb catch. Finished in bright red. Packed in colorful counter display carton.

No.	Length	Wt. Doz.	Packed
D150	8"	10 lbs.	6 in carton

LOW PRICED PRUNER
'BRIAR EDGE' BY TRUE TEMPER



Competitively priced pruner. Polished and tempered steel blade, strong malleable handles. Adjustable hinge nut with strong volute spring. Bright red handles.

No.	Length	Wt. Doz.	Packed
117	9"	9 lbs.	6 in box 36 in carton

SHEEP SHEAR TYPE GRASS SHEAR
'BRIAR EDGE' BY TRUE TEMPER

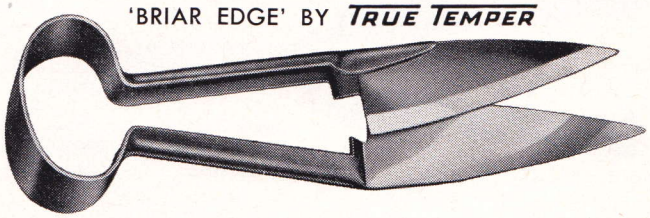

Sturdy, one-piece construction. Spring action tempered steel. Sheep shear type. Bevels and inside of blades polished. Bright red bows.

No.	Length	Wt. Doz.	Packed
33S	12"	8 lbs.	6 in box 72 in carton

TRUE TEMPER Hedge Shears

'ROCKET' FULL SIZE HEDGE SHEAR
TRUE TEMPER

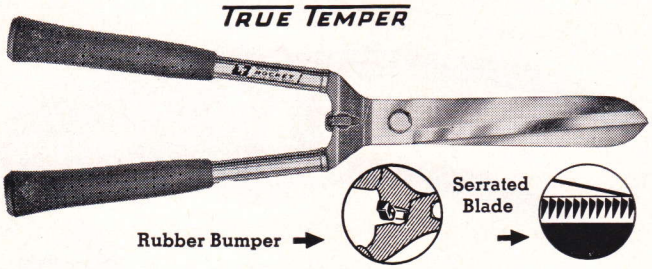

Tubular steel chrome-plated shafts, with rubber-cushion grips. Absorbs shocks 3 ways: in the shafts, the grips, and rubber bumper. Handles will not bend, cannot come loose. Grip will not slip. Dynamic hinge bolt and nut provide positive adjustment. Polished blades, lower blade serrated. Lightweight, perfectly balanced.

No.	Blade	Overall	Wt. Doz.	Packed
AT85	8½"	22"	34 lbs.	4 in carton

'DYNAMIC' HEDGE SHEAR WITH BUMPER
TRUE TEMPER

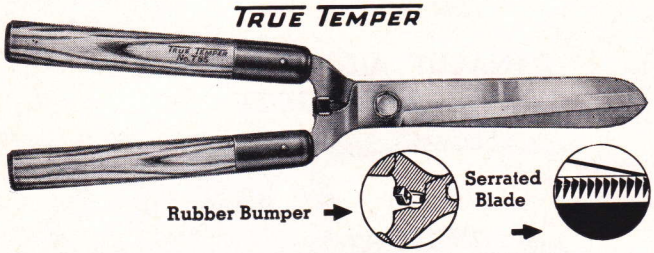

A precision shear for the expert gardener. 8½" polished blades with lower blade serrated. Spring steel retainer holds rubber bumper. Dynamic hinge bolt and nut provide positive adjustment. Fire hardened oval handles.

No.	Blade	Overall	Wt. Doz.	Packed
T85	8½"	21"	30 lbs.	4 in carton

'DYNAMIC' HEDGE SHEAR — OVAL HANDLES
TRUE TEMPER

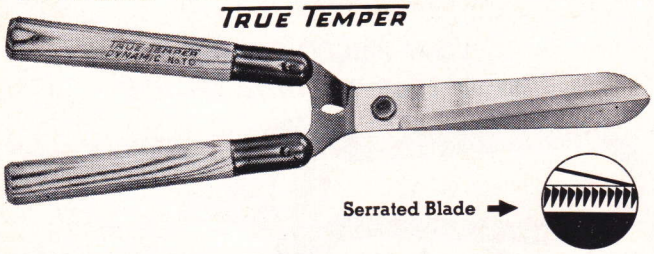

America's most popular hedge shear. Special forged steel blades, hardened and tempered. Polished blades are shock tested, lower blade is serrated. Dynamic hinge bolt and nut provide easy adjustment. Crystalite maroon ferrules. Fire hardened oval handles.

No.	Blade	Overall	Wt. Doz.	Packed
TD	8½"	21"	27 lbs.	4 in carton

'FLINT EDGE' SHEARS — POPULAR PRICED
TRUE TEMPER

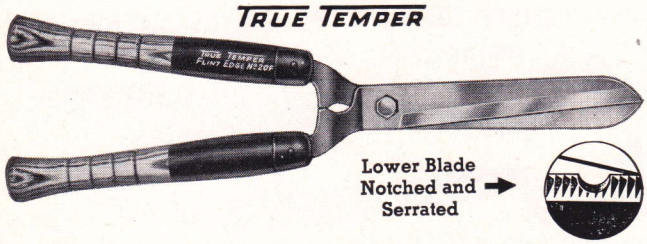

Quality hedge shear of popular design. Finest cutlery steel blades, fully heat treated. Lower blade serrated with limb notch. Dynamic hinge bolt and nut provide positive adjustment. Fire hardened comfort grip handles with black trim and bright red tangs.

No.	Blade	Overall	Wt. Doz.	Packed
20F	8½"	21"	29 lbs.	6 in carton

'ROCKET' LADIES' SIZE HEDGE SHEAR
TRUE TEMPER

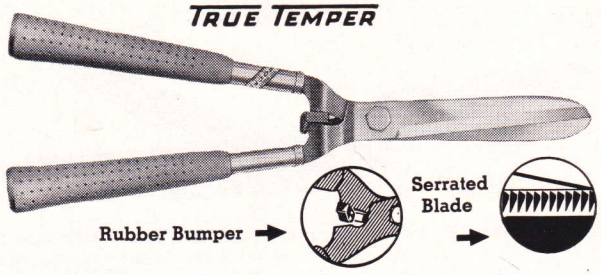

A lightweight and perfectly balanced garden shear. Boron alloy tubular steel handles, chrome plated. Rubber cushion grips will not slip even when wet. Shock absorbing rubber bumper. Dynamic hinge bolt and nut. Polished blades with serrated lower blade. Bright red tangs.

No.	Blade	Overall	Wt. Doz.	Packed
ATL6	6½"	17"	19 lbs.	4 in carton

LOW PRICED LADIES' SIZE HEDGE SHEAR
'COMET'

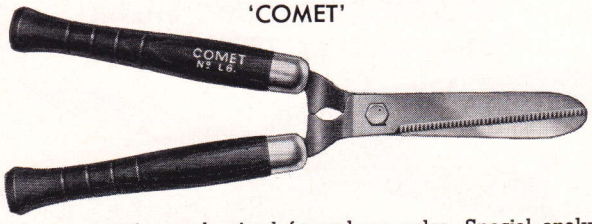

Sturdy construction and priced for volume sales. Special analysis steel blades are heat treated. Top bevel serrated and inside of blades polished. Hardened steel hinge bolt and lock nut provide positive adjustment. Ebony handles with bright red tangs. Bright plated ferrules.

No.	Blade	Overall	Wt. Doz.	Packed
L6	6½"	17"	17 lbs.	6 in carton

LOW PRICED FULL SIZE HEDGE SHEAR
'COMET'

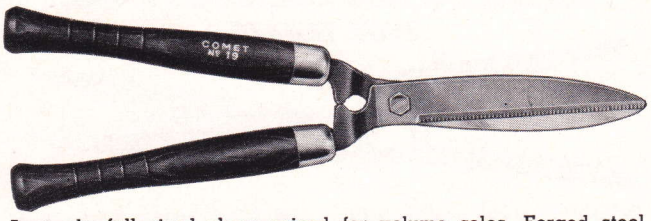

A sturdy full sized shear priced for volume sales. Forged steel heat-treated blades. Top bevel serrated and inside of blade polished. Hardened steel hinge bolt and lock nut. Ebony handles with bright red tangs. Bright plated ferrules.

No.	Blade	Overall	Wt. Doz.	Packed
19	8"	19½"	28 lbs.	6 in carton

LOW PRICED SMALL SIZE LOPPER
'COMET'

Ebony handles shaped for comfortable grip. Bevel and inside of blade polished. Blades are forged steel, heat treated. Self-locking hinge nut and bolt. Bright plated ferrules with bright red tangs.

No.	Length	Wt. Doz.	Packed
121	21"	18 lbs.	6 in carton

TRUE TEMPER Lopping Shears

'ROCKET' HOME AND GARDEN LOPPER
TRUE TEMPER

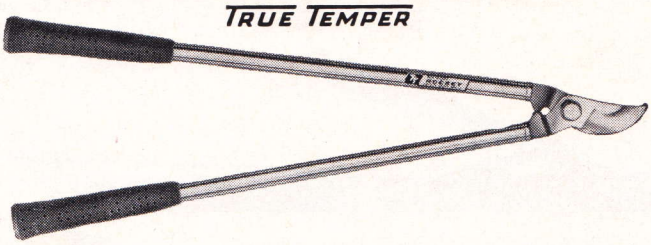

ROCKET construction with tubular steel handles for extra strength. Rubber cushion grips and chrome-plated shafts absorb shocks. Hands will not slip when wet or gloved. Full-size blade and hook with Dynamic hinge bolt and nut for positive adjustment. Lightweight, perfectly balanced.

No.	Length	Wt. Doz.	Packed
A103	26"	31 lbs.	4 in carton

'ROCKET' HEAVY DUTY LOPPER
TRUE TEMPER

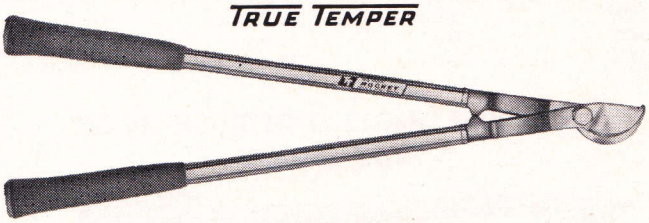

Famous ROCKET handles absorb shocks. Chrome-plated tubular steel shafts. Rubber cushion grip will not slip. Fully heat treated blade, drop-hook action. Dynamic hinge bolt and nut for positive adjustment. Perfect balance. Recommended for tree surgeons, linesmen, expert orchardists, citrus workers.

No.	Length	Wt. Doz.	Packed
A105	26"	33 lbs.	4 in carton

'ROCKET' VINEYARD AND SHRUB LOPPER
TRUE TEMPER

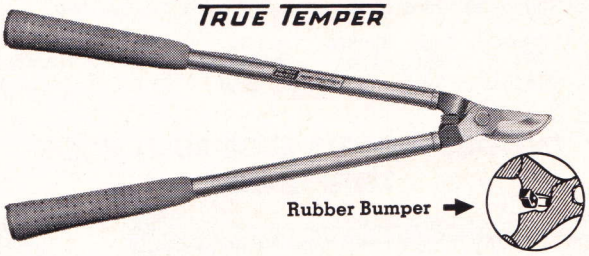

Designed especially for use in vineyard pruning. ROCKET construction provides strongest steel construction—yet light in weight and perfectly balanced. Tubular steel handles are chrome plated and heat treated for extra strength. Rubber cushion grips provide non-slip grip. Rubber shock absorbing bumper reduces fatigue. Dynamic hinge bolt and nut provide positive adjustment. Pointed hook and blade of finest cutlery steel.

No.	Length	Wt. Doz.	Packed
A101	21"	22 lbs.	4 in carton

LIGHTWEIGHT VINE LOPPER
TRUE TEMPER

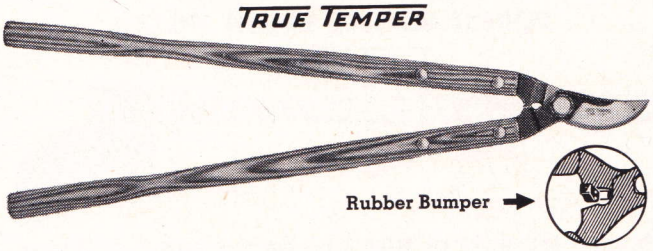

Designed for light grove and vineyard pruning. Available with or without rubber bumper. Expertly hardened and tempered. Precision ground blade and pointed hook. Fire hardened hickory handles bolted to head. Dynamic hinge bolt and nut.

No.	Length	Wt. Doz.	Packed
102 (without bumper)	25½"	27 lbs.	4 in carton
102RB (with bumper, see insert)	25½"	27 lbs.	4 in carton

HOME AND GARDEN LOPPER
TRUE TEMPER

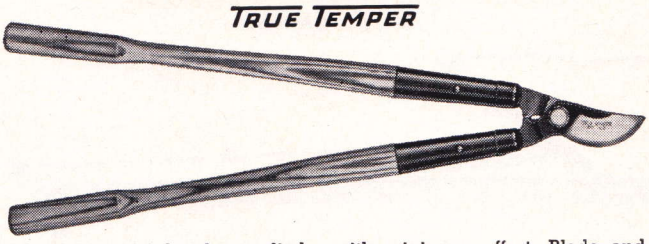

Large powerful head cuts limbs with minimum effort. Blade and hook are precision ground for clean crisp cutting action. Dynamic hinge bolt and nut provide positive adjustment. Steel tubular ferrules finished in Crystalite maroon. Husky, select ash handles—properly shaped and fire hardened.

No.	Length	Wt. Doz.	Packed
103	27¾"	36 lbs.	4 in carton

HEAVY DUTY LOPPER
TRUE TEMPER

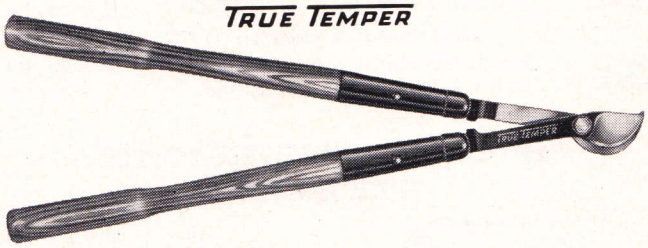

Designed especially for tree surgeons, linesmen and expert orchardists. Head hardened, tempered and polished. Extended steel shanks fully tempered for added strength. Dynamic hinge bolt and nut insure positive adjustment. Tapered steel ferrules finished in Crystalite maroon. Finest fire hardened ash handles.

No.	Length	Wt. Doz.	Packed
105	26½"	37 lbs.	4 in carton

LIGHTWEIGHT SHRUB LOPPER
TRUE TEMPER

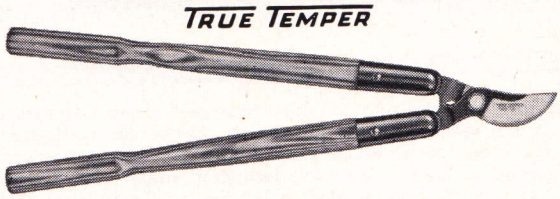

Designed for light vine, shrub and brush pruning—ideal for homeowners. Hardened steel blade and hook, precision ground and polished. Dynamic hinge bolt and nut provide positive adjustment. Strong steel ferrules finished in Crystalite maroon. Finest quality ash handles—fire hardened.

No.	Length	Wt. Doz.	Packed
101	21"	22 lbs.	4 in carton

'FLINT EDGE' FULL SIZE LOPPER
TRUE TEMPER

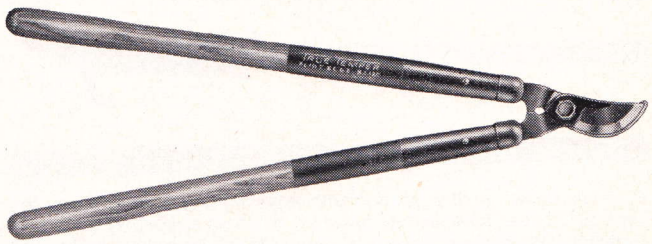

Low priced for average home use but large size and extra rugged to give long service. Hardened steel blade and hook, precision ground. Dynamic hinge bolt and nut provide exact tension and easy adjustment. Tubular steel ferrules lacquered bright red. Shaped hardwood handles, clear lacquer finish.

No.	Length	Wt. Doz.	Packed
122	27¾"	35 lbs.	6 in carton

TRUE TEMPER Tree Pruners and Bush Hooks

2-PIECE EXTENSION TREE LOPPER

TRUE TEMPER

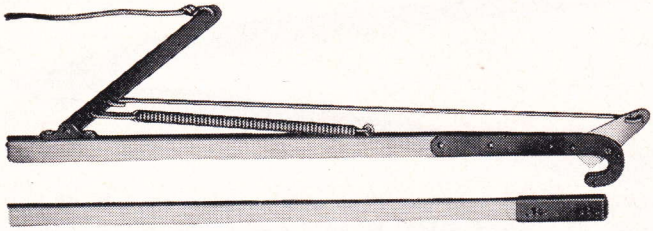

Used by homeowners as well as orchardists and professional tree trimmers. Sturdy steel hook with steel strap ferrules riveted to handle. Heavy steel blade, hardened and tempered. Cuts up to 1" branches. Long rope attached to operating arm. 12 ft. stained hardwood handle—composed of two 6 ft. sections joined with metal clamp. Can be used as 6 or 12 ft. pruner.

No.	Length	Wt. Doz.	Packed
12W2	2—6 ft. sections	72 lbs.	3 in bundle
	Extra Handle Sections for 12W2		
WP2T	Top handle section 6 ft.	18 lbs.	6 in bundle
WP2B	Bottom handle section 6 ft.	18 lbs.	6 in bundle

ALUMINUM 3-PIECE TREE LOPPER

TRUE TEMPER

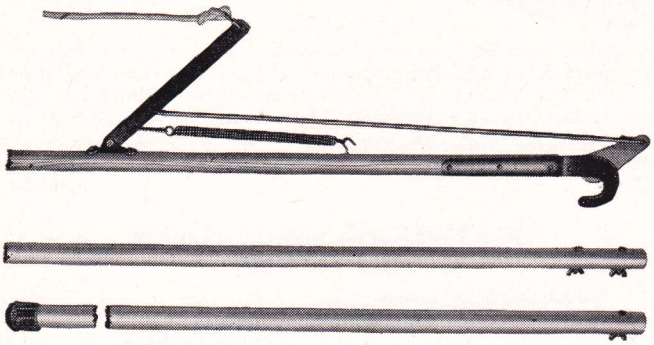

30% lighter in weight yet stronger because the two 4 ft. extension handles are made of aluminum tubing. Lower section telescopes into middle section for easier storage. Bolt and wing nut assembly. Top section is sturdy hardwood lacquered bright red. Steel limb hook has strap ferrules riveted to top section. Long rope attached to operating arm. Rubber bumper cap on base. Can be used as 4, 8, 10 or 12 ft. pruner.

No.	Length	Wt. Doz.	Packed
12A3	3—4 ft. sections	58 lbs.	3 in bundle

2-PIECE PULLEY TREE LOPPER

TRUE TEMPER

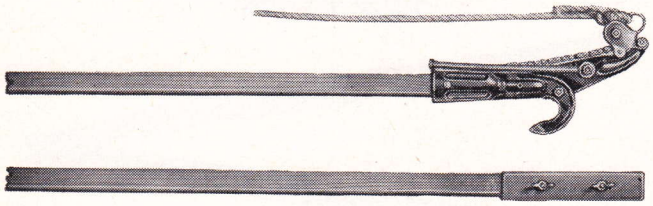

A professional quality pruner with easy cutting action. Operating rope is 12 feet long and is attached to chain cable, which works through ball bearing pulley. Cuts up to 1" branches with ease. Durable malleable head with compression recoil spring. Two six foot stained hardwood handle sections joined with steel side plates. Can be dismantled quickly for use as 6 foot pruner and for storage.

No.	Length	Wt. Doz.	Packed
12P2	2—6 ft. sections	60 lbs.	3 in bundle
12PB Extra blades			12 in carton

WATERS PATTERN TREE LOPPER

TRUE TEMPER

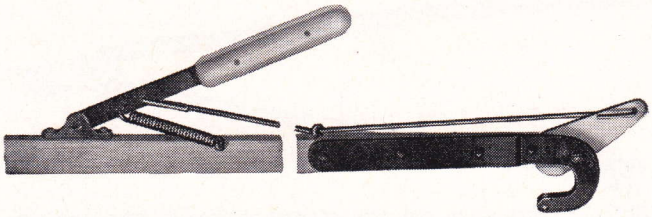

Designed for general purpose use where the advantages of the extension handle are not needed. One-piece handle. Operated by lever connected to heavy blade of high carbon tempered steel. Cuts one inch branches easily. Sturdy steel hook with strap ferrules riveted to hardwood handle. Handle grip is riveted to operating lever.

No.	Length	Wt. Doz.	Packed
6W	6 ft.	36 lbs.	6 in bundle
8W	8 ft.	40 lbs.	6 in bundle
10W	10 ft.	44 lbs.	6 in bundle
12W	12 ft.	48 lbs.	6 in bundle

'BLOODS' SINGLE EDGE BUSH HOOK

TRUE TEMPER

Built for clearing work that is too heavy for a scythe and not suited for an axe. Heavy duty, high carbon forged and tempered steel blade. Sharp beveled edge. Red enameled blade with blue blade stamp. 36" oval hickory handle, white lacquer finish.

No.	Head Wt.	Point Size	Cutting Edge	Handle Pattern	Wt. Doz.	Packed
10	3½ lbs.	3½"	11"	36" Bent	56 lbs.	6 in carton

'BLOODS' DOUBLE EDGE BUSH HOOK

TRUE TEMPER

Built for clearing work that is too heavy for a scythe and not suited for an axe. Heavy duty, high carbon forged and tempered steel blade. Sharp beveled edges. Red enameled blade with blue blade stamp. 36" oval hickory handle, white lacquer finish.

No.	Head Wt.	Point Size	Cutting Edge	Handle Pattern	Wt. Doz.	Packed
32	3¼ lbs.	3¼"	12"	36" Straight	56 lbs.	6 in carton

FOREST SERVICE BRUSH HOOK

TRUE TEMPER

A new safety designed Brush Hook made to meet U. S. Dept. of Agriculture Forest Service Specification No. 180, with blunt point and heel. For cutting and chopping forest fire control line through brush and saplings. Single edged blade forged from best quality steel, heat treated. Finished in fire engine red.

No.	Blade Length	Blade Width	Handle Pattern	Wt. Doz.	Packed
9	9"	3⅜"	36" Straight	56 lbs.	6 in carton

TRUE TEMPER Bank Blades and Scythes

'KELLY PERFECT' HEAVY DUTY BANK BLADE
TRUE TEMPER

Heavy duty for rough going in clearing undergrowth and brush. 12 gauge double edge blade of forged and tempered high carbon steel. Smooth tumblast finish with polished cutting edges. Edges extend beyond channel plates for extra cutting surface. Steel channel plates hold blade securely in handle with bolts for easy removal. Straight hickory handle, white lacquer finish.

No.	Blade Length	Blade Width	Handle Length	Wt. Doz.	Packed
16-40	16"	5"	40"	64 lbs.	6 in carton

'KELLY PERFECT' LIGHTWEIGHT BANK BLADE
TRUE TEMPER

14 gauge double edge blade of forged and tempered high carbon steel. Smooth tumblast finish with polished cutting edges. Steel channel plates hold blade securely with 3 bolts for easy removal. Straight hickory handle, white lacquer finish.

No.	Blade Length	Blade Width	Handle Length	Wt. Doz.	Packed
12-40	12"	4"	40"	46 lbs.	6 in carton
12-36	12"	4"	36"	44 lbs.	6 in carton

LOW PRICED BANK BLADE
'JIM DANDY'

Low priced but sturdily built for hard service. Medium weight double edge blade of high carbon steel, heat treated. Entire front edge and ⅔ of back edge sharpened. Forge finish. Blade is attached to handle with 3 large flat head bolts. Handle of natural hickory.

No.	Blade Length	Blade Width	Handle Length	Wt. Doz.	Packed
116-40	16"	5"	40"	64 lbs.	6 in carton
116-36	16"	5"	36"	52 lbs.	6 in carton

'BULL DOG' COMBINATION PATTERN SCYTHE
TRUE TEMPER

Heavier weight for railways and industry. Built for the roughest kind of use in heavier growth. One-piece forged construction. Web groove extends through the heel for rigidity and extra support. Blade beveled on both sides due to heavier construction. Half set. Forge finish.

No.	Blade Length	Blade Thickness	Blade Width	Heel Width	Wt. Doz.	Packed
BD	26"-30"	.060" to .075"	1⅞"	3" to 3½"	24 lbs.	6 in carton

NEW ENGLAND GRASS SCYTHE
'BRIAR EDGE' BY TRUE TEMPER

One-piece construction. Forged from finest tempered scythe steel. Heel grooved for added strength. Forge finish. 20% lighter, yet stronger. Perfectly balanced. Half set.

No.	Blade Length	Blade Thickness	Blade Width	Heel Width	Wt. Doz.	Packed
BGN	32"	.055" to .065"	1½" to 1⅝"	2½"	24 lbs.	6 in carton

GRASS SCYTHE
'BRIAR EDGE' BY TRUE TEMPER

One-piece construction. Forged from finest tempered scythe steel. Heel grooved for added strength. Forge finish. 20% lighter, yet stronger. Perfectly balanced. Half set.

No.	Blade Length	Blade Thickness	Blade Width	Heel Width	Wt. Doz.	Packed
BG	28"-30"	.055" to .065"	1½" to 1⅝"	2½"	24 lbs.	6 in carton

WEED SCYTHE
'BRIAR EDGE' BY TRUE TEMPER

One-piece construction. Forged from finest tempered scythe steel. Heel grooved for added strength. Forge finish. 20% lighter, yet stronger. Perfectly balanced. Half set.

No.	Blade Length	Blade Thickness	Blade Width	Heel Width	Wt. Doz.	Packed
BW	24"-28"	.060" to .075"	2" to 2⅛"	3"	32 lbs.	6 in carton

BUSH SCYTHE
'BRIAR EDGE' BY TRUE TEMPER



One-piece construction. Forged from finest tempered scythe steel. Heel grooved for added strength. Forge finish. 20% lighter, yet stronger. Perfectly balanced. Half set.

No.	Blade Length	Blade Thickness	Blade Width	Heel Width	Wt. Doz.	Packed
BB	19"-21"	.074" to .088"	2½" to 2¾"	3⅛"	30 lbs.	6 in carton

TRUE TEMPER Grass and Weed Cutters

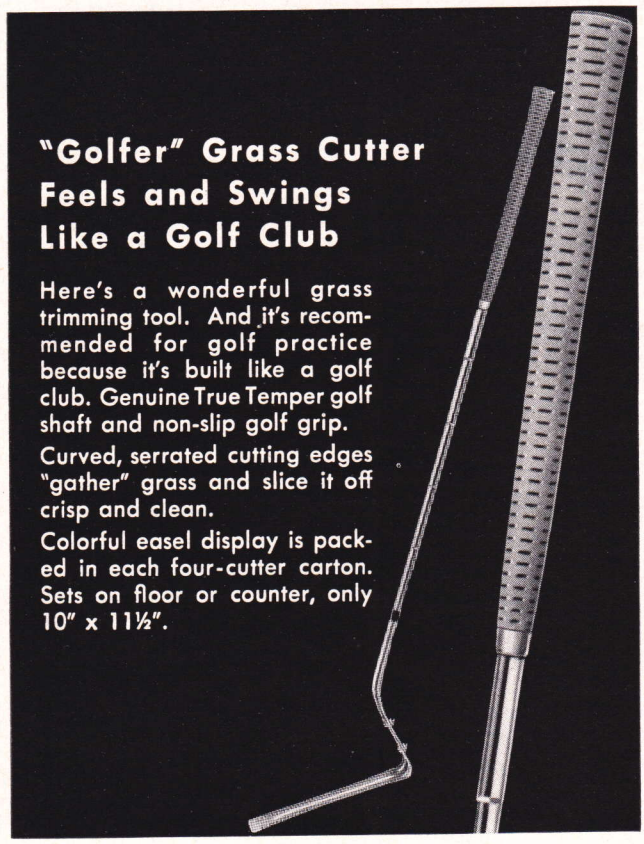

"Golfer" Grass Cutter Feels and Swings Like a Golf Club

Here's a wonderful grass trimming tool. And it's recommended for golf practice because it's built like a golf club. Genuine True Temper golf shaft and non-slip golf grip.

Curved, serrated cutting edges "gather" grass and slice it off crisp and clean.

Colorful easel display is packed in each four-cutter carton. Sets on floor or counter, only 10" x 11½".

'GOLFER' DELUXE GRASS CUTTER

TRUE TEMPER

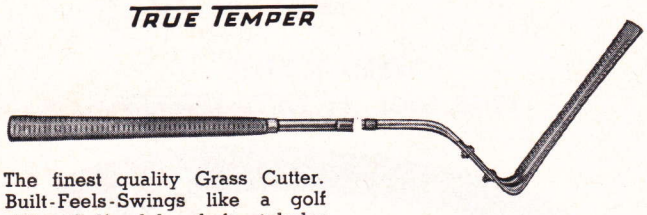

The finest quality Grass Cutter. Built-Feels-Swings like a golf club. Golf club shaft, tubular steel, chrome plated. Golf club grip of non-slip rubber fiber. Serrated double edge blade, razor sharp, elliptical shape. Forged, heat treated and tempered blade, finished in matching silver lacquer and bolted to chrome plated shank, removable for easy sharpening. Each carton of 4 contains a colorful counter display easel.

No.	Length	Blade	Wt. Doz.	Packed
A29	38"	9" x 1½"	15 lbs.	4 in carton
EXTRA BLADES ONLY				
29S (Blades only)		9" x 1½"	3 lbs.	12 in carton

'KELLY PERFECT' GRASS CUTTER

TRUE TEMPER

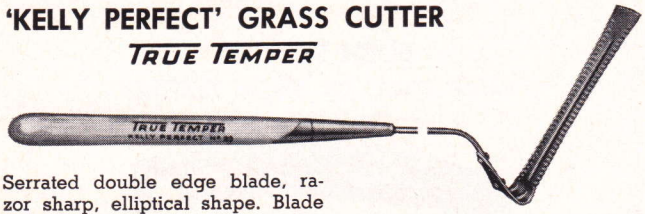

Serrated double edge blade, razor sharp, elliptical shape. Blade forged from high carbon scythe grade steel, heat treated and tempered. Blade is firmly bolted to steel shank, removable for easy sharpening. Shaft and handle ferrule lacquered bright red. Fire hardened ash handle shaped for comfortable grip.

No.	Length	Blade	Wt. Doz.	Packed
29	38"	9" x 1½"	14 lbs.	6 in carton
EXTRA BLADES ONLY				
29S (Blades only)		9" x 1½"	3 lbs.	12 in carton

SERRATED CUTTING EDGES



This bottom view shows the superior cutting edge of True Temper blades on Grass Cutters No. A29, No. 29 and Weed Cutter No. 26. The serrations in the blade are forged deeper, ground sharper and are of a special elliptical shape to provide more cutting edge with grass and weed holding qualities.

'KELLY PERFECT' WEED CUTTERS

TRUE TEMPER

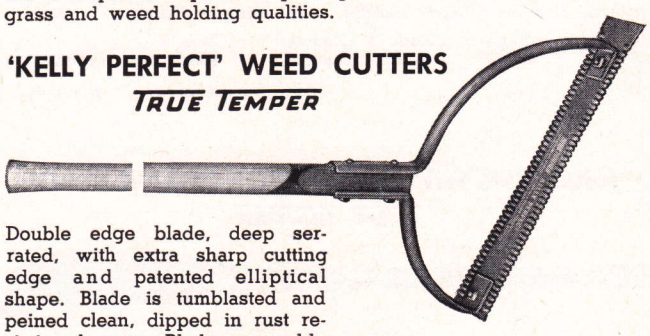

Double edge blade, deep serrated, with extra sharp cutting edge and patented elliptical shape. Blade is tumblasted and peined clean, dipped in rust resisting lacquer. Blade removable for sharpening. Fire hardened oval handle 31" long. Bow arms bolted to handle and finished in bright blue lacquer.

No.	Length	Blade	Wt. Doz.	Packed
26 (serrated blade)	38"	14" x 2½"	28 lbs.	6 in carton
23 (plain blade, not serrated)	38"	14" x 2½"	28 lbs.	6 in carton
EXTRA BLADES ONLY				
26S (Blades only serrated)		14" x 2½"	7 lbs.	12 in carton
23S (Blades only, not serrated)		14" x 2½"	7 lbs.	12 in carton

SMOOTH BLADE WEED CUTTER

'JIM DANDY'

Low cost yet ruggedly built. Double edge blade is elliptical shape with plain cutting edge, heat treated and protected with bright red lacquer. Bolted to heat treated steel bows. Removable for sharpening. Bows and lower section of handle finished in black. 31" oval hardwood handle bolted to bows.

No.	Length	Blade	Wt. Doz.	Packed
36	38"	14" x 2½"	28 lbs.	6 in carton
EXTRA BLADES ONLY				
23S (Blades only)		14" x 2½"	7 lbs.	12 in carton

SMOOTH BLADE GRASS CUTTER

'JIM DANDY'

A competitive priced grass cutter. High carbon steel double edge plain blade, not serrated. Blade is elliptical shape, heat treated and bolted to the steel shank, removable for sharpening. Natural finish ash handle with black trim and red blade.

No.	Length	Blade	Wt. Doz.	Packed
39	36"	9" x 1½"	14 lbs.	6 in carton
EXTRA BLADES ONLY				
39S (Blades only)		9" x 1½"	3 lbs.	12 in carton

TRUE TEMPER Grass Hooks

'KELLY PERFECT' LONG HANDLE HOOK
TRUE TEMPER

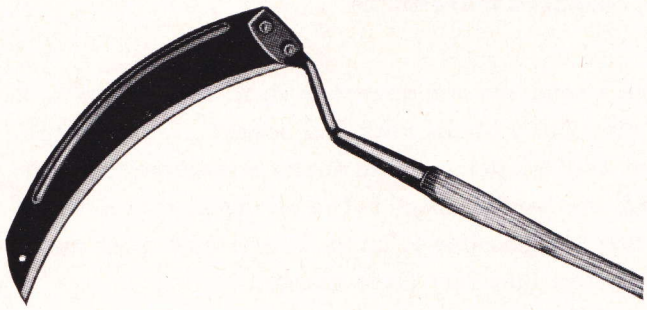

Especially handy for trimming grass under hedges, shrubbery or along fence rows, terraces and corners. Finest quality scythe steel, hardened and tempered. Detachable blade with keen raced edge. Blade furnace blued. Forged steel shank. Fire hardened 44" handle.

No.	Blade Length	Wt. Doz.	Packed
5	11"	20 lbs.	6 in carton

'KELLY PERFECT' SHORT HANDLE HOOK
TRUE TEMPER

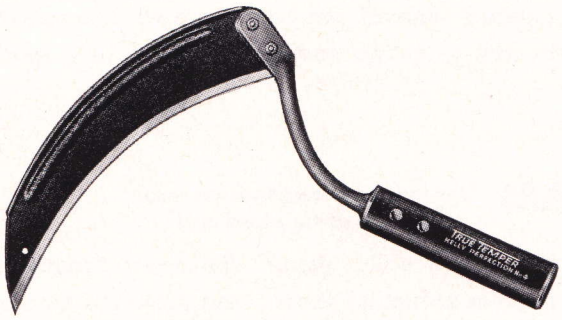

Forged from finest quality scythe steel, hardened and tempered to take and keep a sharp edge. Detachable blade with keen raced edge. Blade furnace blued. Red lacquered steel shank. Nail hole in tip of blade. Oval grip of select quality hickory.

No.	Blade Length	Wt. Doz.	Packed
4	11"	11 lbs.	6 in carton

COMPETITIVE GRASS HOOK
'CHAMPION'

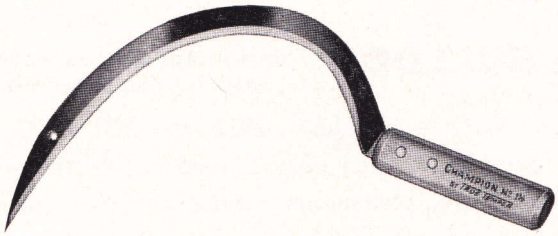

Narrow blade with tapered point, forged from scythe steel. Nail hole in tip. Offset tang riveted to oval shaped handle. Natural finish hickory handle.

No.	Blade Length	Wt. Doz.	Packed
1½	15½"	7 lbs.	6 in carton

FEATHERWEIGHT GRASS TRIMMER
TRUE TEMPER

For extra close cutting near shrubbery and along walks and walls. Special bat shaped 15" handle assures perfect balance and ease in use. Razor blade steel, expertly tempered to a keen cutting edge. Fire hardened handle is securely bolted to the blade with side plate for added strength. Bright red trim.

No.	Blade Length	Wt. Doz.	Packed
1S	8¾"	6 lbs.	6 in carton

LIGHTWEIGHT GRASS HOOK — POLISHED
TRUE TEMPER

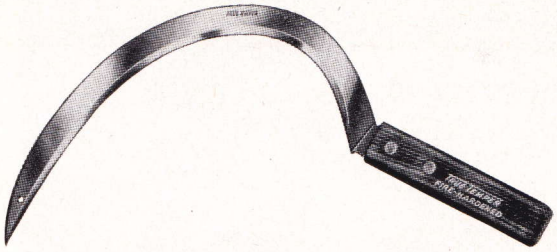

A lightweight grass hook with a narrow blade. Nail hole in tip. Blade forged from scythe steel and full polished on top side. Offset tang riveted to oval hickory handle. Offset tang lacquered red.

No.	Blade Length	Wt. Doz.	Packed
2	15½"	7 lbs.	6 in carton

OUTSTANDING QUALITY FEATURES OF TRUE TEMPER GRASS HOOKS

- High carbon steel blades
- Completely heat treated
- Finest quality northern ash and hickory handles
- Handy hang-up hole in blades
- Convenient six-pack shelf carton

TRUE TEMPER TAPER FORGED SHOVELS

Job rated for every shovel need to best satisfy all your customers

Start with a solid bar of high-carbon steel. Taper forge it on special dies into a blade, neck and socket . . . trim, shape, heat-treat and temper . . . then insert a straight-taper, fire hardened ash handle. Result? The strongest shovel for its weight that it is possible to build. This is what your customers get when they buy these brands . . .

DYNALITE (turned steps at no extra cost)

Taper forged with a tube shank. Combines strength, light weight, and low cost better than any shovel made. Perfect for the average home and for light industrial use. Forging process puts strength at wear points, keeps edges thin for light weight and easier shoveling. Total weight for dirt shovels is under 4 pounds. Smooth, forge finish blade is self scouring—dirt knocks off easily. Fire hardened handle is straight tapered—shovel can be rehandled in 8 minutes. Available in dirt, irrigating and spading, rice, and garden shovels.

BANTAM (turned steps optional on most models at no extra cost)

Taper forged with a solid shank. Strongest construction known. A popular industrial shovel, and preferred by many homeowners because of its ruggedness. Heavier gauge than DYNALITE with extra metal at wear points. Bend (lift) is in the solid steel neck, not in the handle or blade. Full capacity blade is smooth and hard. Dirt knocks right off, makes shoveling faster. Fire hardened straight taper handle.

Available in dirt, irrigating and spading, rice and garden shovels, and ditch and drain spades.

FOX & BULLDOG (turned steps optional on most models at no extra cost)

Taper forged with solid shanks, FOX and BULLDOG are heavy and extra heavy duty shovels respectively. They are used where severe, continuous service requires the ultimate in shovel strength and quality.

FOX is available in dirt, clam, and moulders shovels and in ditch and drain spades.

BULLDOG is available in railroad track and mining shovels.

TRUE TEMPER DYNALITE SHOVELS

STRONGER because they're taper forged



Taper forging produces a one-piece blade and socket—no welds or seams. Starting from a solid bar of high carbon steel, the blade is taper forged by rolling over special dies, then blanked to size and shaped with a tab end spring tension socket. Heat treating in automatically controlled furnaces provides uniform exact hardness. Forged finish is smoother, harder, free scouring and rust resistant.

PUTS METAL WHERE NEEDED

Taper forging produces—thicker points for wear . . . thicker mid-section for extra stiffness . . . thicker shoulders for strength and foot rest . . . thick tubed spring tension neck with proper bend in the steel instead of the handle for perfect lift. Shaped wood plug seals bottom of this tube to keep out mud and dirt.

LIGHTER with perfect balance, lift and hang

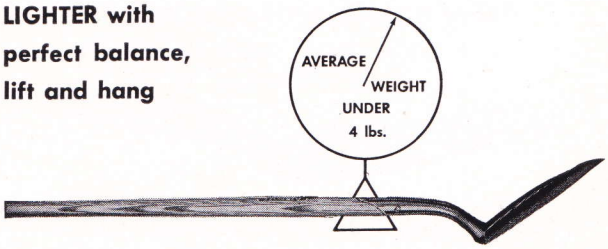

Dynalite Shovels are constantly checked for uniform weight. Long handle round point Dynalite shovels consistently average under 4 lbs. The extra light weight of Dynalite Shovels is made possible by taper forging without sacrificing strength, quality or size. The balance is down-the-center from tip of handle to point of blade. They hang perfectly in the hand with no side wobble.

STRAIGHT TAPER HANDLES—fire hardened



Because taper forged Dynalite shovels take straight taper handles, the bend, lift or balance are not changed when handles are replaced. Can be replaced in 8 minutes. Sound Northern Ash, Fire-Hardened to resist weather, wear and vermin. Smoother finish for better feel. Handles identified by a 2-color imprint.

DYNALITE DIRT SHOVELS

ROUND POINT—LONG HANDLE



Extra light weight but with strength built-in. For general purpose use they are America's outstanding values. 6 in bundle.

No.	Handle	Size	Blade	Wt. Doz.	Repair Handle
DLR	47" Long	2	8⅞" x 11½"	46 lbs.	T44½F

ROUND POINT—D HANDLE



Taper forged blade and socket add strength, make light weight possible. Finest True Temper steel D top. 6 in bundle.

No.	Handle	Size	Blade	Wt. Doz.	Repair Handle
DR	28" Dee	2	8⅞" x 11½"	49 lbs.	TT25½F

SQUARE POINT—LONG HANDLE



Taper forged blade and socket add strength, make light weight possible. For general purpose use. 6 in bundle.

No.	Handle	Size	Blade	Wt. Doz.	Repair Handle
DLS	47" Long	2	9¾" x 12"	52 lbs.	T44½F

SQUARE POINT—D HANDLE



Taper forged blade and socket add strength, make light weight possible. Finest True Temper steel D top. 6 in bundle.

No.	Handle	Size	Blade	Wt. Doz.	Repair Handle
DS	28" Dee	2	9¾" x 12"	54 lbs.	TT25½F

DYNALITE IRRIGATING & SPADING



Straighter lift. Designed for spading, digging and irrigating. Regular dish. 47" long knob-end handles. 6 in bundle.

No.	Size	Blade	Blade Lift	Wt. Doz.	Repair Handle
ID-1	1	8" x 11"	3¾"	44 lbs.	T44½F
ID-2	2	8¾" x 11½"	4½"	46 lbs.	T44½F

DYNALITE RICE SHOVEL



Clipped point. Perforated. 47" long handle. 6 in bundle.

No.	Size	Blade	Blade Lift	Wt. Doz.	Repair Handle
RD	2	8¾" x 11"	3¾"	46 lbs.	T44½F

DYNALITE GARDEN SHOVEL

Special flat edge pattern. Smaller blade makes it ideal for light spading, edging and cultivating. Fitted with 41" long, knob-end handle. Overall length 49½". 6 in bundle.

No.	Blade	Wt. Doz.	Repair Handle
DGS	6⅛" x 9½"	34 lbs.	T42F

DYNALITE GARDEN SPADES



Taper forged like all Dynalite shovels for strength and light weight. Square points. 6 in bundle.

No.	Handle	Blade	Wt. Doz.	Repair Handle
SDL	49" Long	7¼" x 12"	47 lbs.	T48F
SD	30" Dee	7¼" x 12"	51 lbs.	TT29F

TRUE TEMPER BANTAM SHOVELS—solid shank

TAPER FORGED WITH SOLID SHANK

. . . strongest shovel construction known

Cross section picture shows how taper forging distributes metal where needed.

BANTAM DIRT SHOVELS

ROUND POINT—LONG HANDLE



With or Without Steps

Taper forged blades and sockets from a solid bar of steel. Light weight for general purpose and light industrial use. Solid shank. 47" long fire-hardened handle. 6 in bundle.

Without Steps	With Steps	Size	Blade	Wt. Doz.	Repair Handle
BLR	**BLRT**	2	8⅞" x 11½"	51 lbs.	**T44½F**

For full polish finish add suffix "FP".
For polished face and satin back add suffix "P".

ROUND POINT—D HANDLE

With or Without Steps

Taper forged blades and sockets from a solid bar of steel. Solid shank. 27" handle, Sturd-E D. 6 in bundle.

Without Steps	With Steps	Size	Blade	Wt. Doz.	Repair Handle
BR	**BRT**	2	8⅞" x 11½"	52 lbs.	**TE24F**

For full polish finish add suffix "FP".
For polished face and satin back add suffix "P".

SQUARE POINT—LONG HANDLE



Taper forged blades and sockets. Light weight for general purpose and light industrial use. Solid shank. 6 in bundle.

Without Steps	With Steps	Size	Blade	Wt. Doz.	Repair Handle
BLS	**BLST**	2	9¾" x 12"	55 lbs.	**T44½F**

For full polish finish add suffix "FP".
For polished face and satin back add suffix "P".

SQUARE POINT—D HANDLE



Taper forged blades and sockets from a solid bar of steel. Solid shank. 27" handle, Sturd-E D. 6 in bundle.

Without Steps	With Steps	Size	Blade	Wt. Doz.	Repair Handle
BS	**BST**	2	9¾" x 12"	55 lbs.	**TE24F**

For full polish finish add suffix "FP".
For polished face and satin back add suffix "P".

Taper forged shovel blades start from a solid bar of high carbon steel, making a one-piece blade and socket without seams or welds. The blade is forged by rolling over dies that distribute the metal where most needed. This puts thickness at the shoulder and the mid-section. In round point shovels it provides thicker point. "Bantam" shovels have a solid steel neck with the socket tapered out to thin edges. The bend of the shovel, which creates the lift, is made in the solid steel neck, not in the handle or blade.

Improved forged finish is smoother, harder and free scouring.

Select quality northern ash handles are fire-hardened and friction polished. Permanently identified with a 2-color imprint. Straight socket makes re-handling quick and easy.

BANTAM IRRIGATING & SPADING

STANDARD PATTERN—REGULAR DISH



With or Without Steps

Straighter lift for digging, transplanting and spading as well as irrigating. Taper forged, solid shank. Blade lifts: Size 1—3¾", Size 2—4½". 47" long handle. 6 in bundle.

Without Steps	With Steps	Size	Blade	Wt. Doz.	Repair Handle
IB-1	**IB-1T**	1	8" x 11"	49 lbs.	**T44½F**
IB-2	**IB-2T**	2	8¾" x 11½"	51 lbs.	**T44½F**

For full polish finish add suffix "FP".
For polished face and satin back add suffix "P".

ROUND CLIP POINT—FLAT DISH

Will not injure canvas dams. Taper forged, solid shank. Blade lift: 2½". 47" long fire-hardened ash handle. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
IB-1RC	1	8⅜" x 9½"	49 lbs.	**T44½F**
IB-2RC	2	8⅞" x 9⅞"	50 lbs.	**T44½F**

For full polish finish add suffix "FP".
For polished face and satin back add suffix "P".

SMALL SIZE—REGULAR DISH



Straighter lift, 3¾", ideal for digging and spading as well as irrigating. Taper forged, solid shank. 47" long handles. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
IBO	0	8" x 10¼"	48 lbs.	**T44½F**
IBOO	00	7" x 9½"	46 lbs.	**T44½F**

For full polish finish add suffix "FP".
For polished face and satin back add suffix "P".

PECOS PATTERN—FLAT DISH

With or Without Steps

Straighter lift 3¾" for irrigating or spading. Square top socket, welded 2" down from top. 48" maple handle, screw-fastened to rehandle easily. Taper forged, solid shank. 6 in bundle.

Without Steps	With Steps	Size	Blade	Wt. Doz.	Repair Handle
IP-1		1	8¼" x 11"	52 lbs.	**TC44½M**
IP-2	**IP-2T**	2	9¼" x 11½"	55 lbs.	**TC44½M**

For full polish finish add suffix "FP".
For polished face and satin back add suffix "P".

TRUE TEMPER BANTAM SHOVELS—solid shank

BANTAM RICE SHOVELS

STANDARD PATTERN



Straighter lift, 3¾". Flat dish blades. Clipped point. Perforated. Taper forged blades and sockets from a solid bar of steel. Solid shank. 47" long handle. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
RB-1	1	8⅜" x 10⅜"	48 lbs.	**T44½F**
RB-2	2	9" x 10⅝"	49 lbs.	**T44½F**

REXORA PATTERN



Straighter lift: Size 1—4"; Size 2—4½". Square top socket welded 2" down from top. Clipped point. Perforated. 47" long handles, screw-fastened. Oval head screw makes rehandling easy. Deep dish blades. Taper forged blades and sockets. Solid shank. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
RR1	1	8¼" x 10½"	52 lbs.	**TC44½F**
RR2	2	9⅛" x 11¼"	54 lbs.	**TC44½F**

BANTAM GARDEN SHOVELS

ROUND POINT—LONG HANDLE

With or Without Steps

Taper forged blades and sockets. Ideal general purpose home shovel. Light weight for easy handling. Heat treated. Solid shank. Spring tension sockets. 40" long handle. 6 in bundle.

Without Steps	With Steps	Size	Blade	Wt. Doz.	Repair Handle
LB0	**LB0T**	0	8" x 10¼"	46 lbs.	**T38F**
LB00	**LB00T**	00	7" x 9½"	42 lbs.	**T38F**

BANTAM DITCH OR POST SPADES

Taper forged blades and sockets. Solid shank. Heat treated. Forge finish. Tab end, spring tension sockets. Riveted steps. 27" handle, Sturd-E steel D. 6 in bundle.

No.	Blade	Wt. Doz.	Repair Handle
BDP14	6⅛" x 5½" x 14"	63 lbs.	**TE24F**
BDP16	6¼" x 5½" x 16"	65 lbs.	**TE24F**
BDP18	6⅜" x 5½" x 18"	71 lbs.	**TE24F**

For polished face, satin back add suffix "P".

BANTAM DRAIN SPADES

Taper forged blades and sockets. Solid shank. Heat treated. Forge finish. Tab end, spring tension sockets. Riveted steps. 27" handle, Sturd-E steel D. 6 in bundle.

No.	Blade	Wt. Doz.	Repair Handle
BDS14	4⅜" x 5½" x 14"	59 lbs.	**TE24F**
BDS16	4¼" x 5½" x 16"	60 lbs.	**TE24F**
BDS18	4" x 5½" x 18"	64 lbs.	**TE24F**

For polished face, satin back add suffix "P".

BANTAM GARDEN SPADES

SQUARE POINT—D HANDLE



Turned Step

Taper forged blade and socket. Solid shank. Heat treated. Hard forge finish. Tab end, spring tension socket. 27" fire-hardened ash handle with Sturd-E steel D top. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
SB	2	7¼" x 12"	52 lbs.	**TE24F**

SQUARE POINT—LONG HANDLE



Turned Step

Taper forged blade and socket. Solid shank. Heat treated. Hard forge finish. Tab end, spring tension socket. 47" fire-hardened ash handle with knob end. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
SBL	2	7¼" x 12"	52 lbs.	**T44½F**

NURSERY OR GARDEN SPADE



Flat blade pattern. Ideal for use in greenhouses and nurseries. Specially adapted for use in hard ground. Taper forged blade and socket. Solid shank. Heat treated. Hard forge finish. Tab end, spring tension socket. 27" fire-hardened ash handle with Sturd-E steel D top. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
HGSF	0	7" x 7" x 10½"	46 lbs.	**TE24F**

CURVED BLADE SPADE

For garden or general use. Taper forged blade and socket. Solid shank. Heat treated. Tab end, spring tension socket. Fire-hardened handle 27" long with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
HGS	0	4½" x 5½" x 11½"	44 lbs.	**TE24F**

IOWA PATTERN

Taper forged blades and sockets. Solid shank. Heat treated. Hard forge finish. Tab end, spring tension sockets. Fire-hardened ash handles. 6 in bundle.

No.	Handle	Blade	Wt. Doz.	Repair Handle
ISB	30" Sturd-E D	6" x 5¾" x 12½"	50 lbs.	**TE27F**
ISBL	47" long	6" x 5¾" x 12½"	49 lbs.	**T44½F**

For riveted steps add suffix "T".

TRUE TEMPER FOX SHOVELS—solid shank

TAPER FORGED WITH SOLID SHANK

. . . contractors weight for industrial use

Cross section picture shows how taper forging distributes metal where needed.

FOX DIRT SHOVELS

ROUND POINT—LONG HANDLE



With or Without Steps

Taper forged blades and sockets. Heat treated. Hard forge finish. Contractors weight for tough industrial work. Solid shank. Fire-hardened ash handles, 50" long. 6 in bundle.

Without Steps	With Steps	Size	Blade	Wt. Doz.	Repair Handle
FLR	**FLRT**	2	9¼" x 12"	60 lbs.	**T46½F**
FLR4		4	9⅞" x 13"	63 lbs.	**T46½F**

For full polish finish add suffix "FP".
For polished face and satin back add suffix "P".

ROUND POINT—D HANDLE



With or Without Steps

Taper forged blades and sockets. Heat treated. Hard forge finish. Contractors weight, for tough industrial work. Solid shank. 27" fire hardened handles, Sturd-E D. 6 in bundle.

Without Steps	With Steps	Size	Blade	Wt. Doz.	Repair Handle
FR	**FRT**	2	9¼" x 12"	58 lbs.	**TE24F**
FR4		4	9⅞" x 13"	60 lbs.	**TE24F**

For full polish finish add suffix "FP".
For polished face and satin back add suffix "P".

SQUARE POINT—LONG HANDLE



With or Without Steps

Taper forged blades and sockets. Heat treated. Hard forge finish. Contractors weight, for tough industrial work. Solid shank. Fire hardened ash handles, 50" long. 6 in bundle.

Without Steps	With Steps	Size	Blade	Wt. Doz.	Repair Handle
FLS	**FLST**	2	9¾" x 12"	61 lbs.	**T46½F**
FLS4		4	10¼" x 13"	65 lbs.	**T46½F**

For full polish finish add suffix "FP".
For polished face and satin back add suffix "P".

SQUARE POINT—D HANDLE



With or Without Steps

Taper forged blades and sockets. Heat treated. Hard forge finish. Contractors weight, for tough industrial work. Solid shank. 27" fire hardened handles, Sturd-E D. 6 in bundle.

Without Steps	With Steps	Size	Blade	Wt. Doz.	Repair Handle
FS	**FST**	2	9¾" x 12"	60 lbs.	**TE24F**
FS4		4	10¼" x 13"	64 lbs.	**TE24F**

For full polish finish add suffix "FP".
For polished face and satin back add suffix "P".

Taper forged blades and sockets start from a solid bar of high carbon steel, making a one-piece blade and socket without seams or welds. The forging dies distribute the metal where strain is greatest and form a solid steel neck. The bend of the shovel, which creates the lift, is made in the forged solid steel neck, not in the handle or the blade. Heat treated. Hard forged finish.

Contractors weight. Heavier than "Bantam" for industrial work.

Fire-hardened ash handles with 2-color imprint, select quality. Straight socket makes rehandling quick and easy.

FOX MOULDERS SHOVELS

SEMI-FLAT DISH BLADE

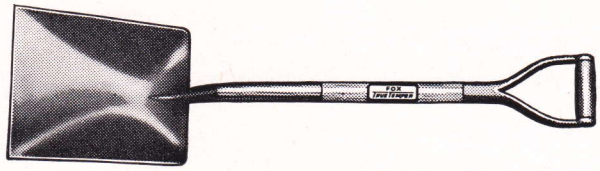

Taper forged blades and sockets. Distributes the metal where the strain is greatest. Blades 10" x 12". Solid shank. Heat treated. Forge finish. 27" fire hardened handles. 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
M	Sturd-E Steel D	60 lbs.	**TEC24F**
MM	Malleable, Pein Grip	69 lbs.	**TMC24F**
MRM	Malleable, Round Grip	70 lbs.	**TRMC24F**
MS	Wood Split D	56 lbs.	**TSC24F**
MFRP	Malleable Rubber Pein	55 lbs.	**TFC24F**
MARP	Aluminum Rubber Pein Insert	55 lbs.	**TAC24F**

FLAT DISH BLADE



Taper forged blades and sockets. Distributes the metal where the strain is greatest. Blades 10" x 12". Solid shank. Heat treated. Forge finish. 27" fire hardened handles. 6 in bundle.

No.	Handle	Wt. Doz.	Repair Handle
MF	Sturd-E Steel D	60 lbs.	**TEC24F**
MMF	Malleable, Pein Grip	69 lbs.	**TMC24F**
MRMF	Malleable, Round Grip	70 lbs.	**TRMC24F**
MSF	Wood Split D	56 lbs.	**TSC24F**
MFRPF	Malleable Rubber Pein	55 lbs.	**TFC24F**
MARPF	Aluminum Rubber Pein Insert	55 lbs.	**TAC24F**

FOX MINING SHOVEL



Stiff point. For mining copper and iron ore. Taper forged blade and socket. Distributes the metal where the strain is greatest. Solid shank. 15 gauge medium weight. Fire hardened ash handle 27" with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
FM	2	9" x 12"	66 lbs.	**TE24F**

Also available with True Temper steel D when specified.
For 50" long knob handle, add suffix "L".

TRUE TEMPER FOX SPADES—*solid shank*

Taper Forged Blades and Sockets

Starts from a solid bar of high carbon steel, making a one-piece blade and socket without seams or welds. The forging dies distribute the metal where the strain is greatest and form a solid steel neck with socket tapered out to thin edges with tab end. The bend of the shovel, which creates the lift, is made in the forged solid steel neck, not in the handle or the blade. Heat treated.

FOX DITCH OR POST SPADES

Taper forged blades and sockets. Distributes the metal where the strain is greatest. Solid shank. Heat treated. Forge finish. Tab end, spring tension sockets. Riveted steps. Fire hardened ash handle. 27" Sturd-E Steel D. 6 in bundle.

No.	Blade	Wt. Doz.	Repair Handle
DP14	6⅛" x 5½" x 14"	63 lbs.	**TE24F**
DP16	6¼" x 5½" x 16"	65 lbs.	**TE24F**
DP18	6⅜" x 5½" x 18"	71 lbs.	**TE24F**

For polished face and satin back add suffix "P".

FOX DRAIN SPADES

Taper forged blades and sockets. Distributes the metal where the strain is greatest. Solid shank. Heat treated. Forge finish. Tab end, spring tension sockets. Riveted steps. Fire hardened ash handle. 27" Sturd-E Steel D. 6 in bundle.

No.	Blade	Wt. Doz.	Repair Handle
DS14	4⅜" x 5½" x 14"	59 lbs.	**TE24F**
DS16	4¼" x 5½" x 16"	60 lbs.	**TE24F**
DS18	4" x 5½" x 18"	64 lbs.	**TE24F**

For polished face and satin back add suffix "P".

FOX CLAM SHOVELS



Taper forged blades and sockets. Solid shank. Heat treated. Professional pattern. Handle lift 20½". Fire hardened ash handles. 6 in bundle.

No.	Blade	Handle	Wt. Doz.	Repair Handle
CP27	3¼" x 5" x 9"	27"	33 lbs.	**T24**
CP41	3¼" x 5" x 9"	41"	38 lbs.	**T38**
CPS	3¼" x 5" x 11" (Stiff Blade)	27"	37 lbs.	**T24**

For polished face and satin back add suffix "P".

TRUE TEMPER BULLDOG SHOVELS—*solid shank*

Heaviest, Strongest Construction

Taper forged to produce a one-piece blade and socket—the strongest shovel construction known! Starting from a solid bar of high carbon steel, the blade is taper forged by rolling over special dies, then blanked to size and shaped with a tab end spring tension socket. Heat treated. Forged finish is smoother, harder, free scouring and rust resistant.

BULL DOG TRACK SHOVELS

TRUE TEMPER



◄ **With or Without Steps**

Railroad weight. 13 gauge. Meets all requirements of the A.R.E.A. Railroad Specifications. It is the adopted standard on nearly all railroads in U.S.A. and Canada. Size 2 blade 9¾" x 12". Taper forged blades and sockets. Heat treated. Hard forge finish. Solid shank. Northern white ash handles. 6 in bundle.

Without Steps	With Steps	Handle	Wt. Doz.	Repair Handle
TBD	**TBDT**	27" TT Steel D	72 lbs.	**TT24**
TEBD	**TEBDT**	27" Sturd-E Steel D	72 lbs.	**TE24**
TMBD	**TMBDT**	27" Malleable D	80 lbs.	**TM24**
TSBD	**TSBDT**	27" Wood Split D	71 lbs.	**TS24**
TLBD	**TLBDT**	50" Long	73 lbs.	**T46½**

TRUE TEMPER Steel D

Sturd-E Steel D



Malleable D

Wood Split D

BULL DOG MINING SHOVEL



Stiff point. For mining copper and iron ore. Taper forged blade and socket. Distributes the metal where the strain is greatest. Solid shank. 14 gauge heavy duty blade. Fire hardened ash handle 27" with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
MBD	3	9" x 13"	60 lbs.	**TE24F**

Furnished with True Temper Steel D when specified.
For long knob end handle add suffix "L".

TAPER FORGED DYNALITE, BANTAM, FOX and BULLDOG SHOVELS REHANDLED IN 8 MINUTES



STEP 1. Grind or file off old rivet and drive out with punch.



STEP 2. Clamp in vise and drive blade off from old handle.



STEP 3. Insert new handle in socket and tap firmly in place.



STEP 4. Drill rivet holes, insert new rivets and pein rivet ends.

TRUE TEMPER

offers a complete line of hollow-back shovels, spades and scoops

Blades and tubular sockets are blanked from sheet steel and formed under a press. There are shapes and sizes for every need. In regular hollow-back construction, they are unequalled for strength, utility and value.

BRIAR EDGE SHOVELS

New, improved design with excellent lift and balance. High-carbon steel blades are heat-treated and tempered. A lightweight, low-cost shovel for general-purpose use. Available in round or square point, with long or D top handle. Also offered in a wide range of patterns for commercial and special purpose uses.

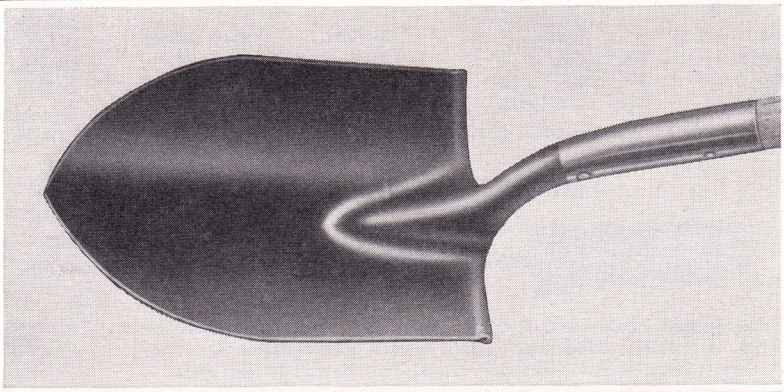

GARDEN SPADES

Standard pattern with square point in both long and D top handles. Also available, a new, long-blade spade for digging and transplanting, has turned step. Blades are high-carbon steel, heat-treated and tempered. Polished socket. Handles are good quality ash, clear-finished, with attractive 2-color imprint.

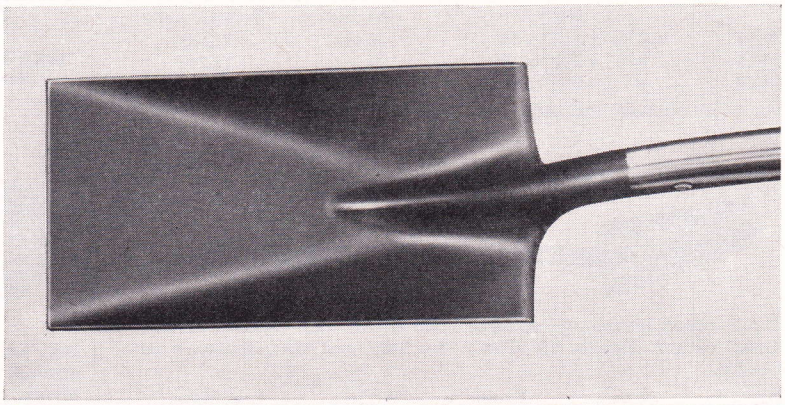

STEEL AND ALUMINUM SCOOPS

There is a True Temper scoop for every purpose in the wide range of patterns, shapes, sizes and grades. Eastern and Western Pattern, Grain, Dairy, Barn, Coal, Sand and Gravel, and other special scoops. Many available with steel or aluminum blade. Pictured at right is the new 'TRU-LITE' Aluminum Scoop featuring added strength, less weight, and reshaped bowl for greater capacity.

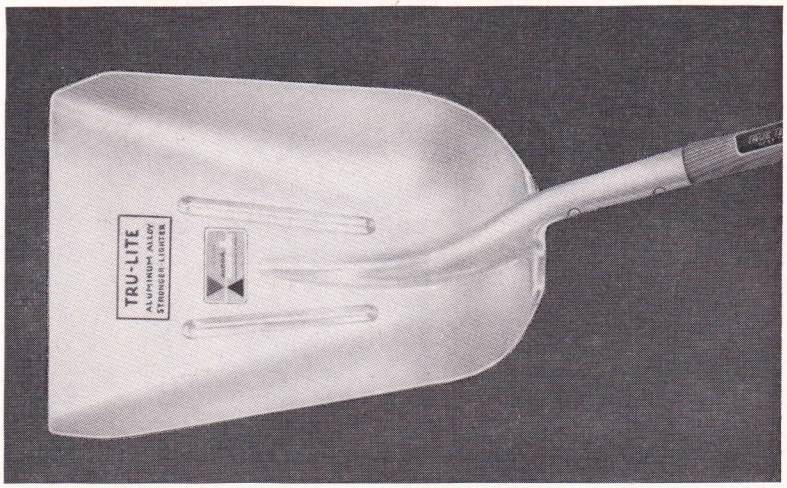

TRUE TEMPER Hollow Back Dirt Shovels

STAMPED FROM HIGH CARBON SHEET STEEL

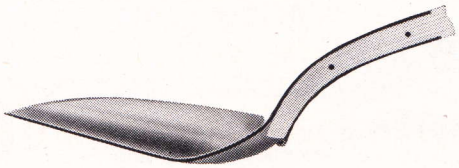

Cross section of a Hollow Back Tubular Socket Shovel

BRIAR EDGE — "C" GRADE SHOVELS

ROUND POINT—LONG HANDLE



Hollow back shovels. Improved design with perfect lift and balance. Carbon steel blades. Heat treated. Black finish. Polished sockets. Good quality, clear lacquered ash handles, 47" long. 6 in bundle.

No.	Size	Handle	Blade	Wt. Doz.	Repair Handle
HELR	2	Long	9⅜" x 12"	48 lbs.	**B48H**
HELR4	4	Long	10¼" x 13"	54 lbs.	**B48H**

ROUND POINT—D HANDLE



Improved pattern hollow back shovels with perfect lift and balance. Carbon steel blades. Heat treated. Black finish. Polished sockets. Good quality, 27" clear lacquered ash handles fitted with Sturd-E D. 6 in bundle.

No.	Size	Handle	Blade	Wt. Doz.	Repair Handle
HER	2	Dee	9⅜" x 12"	47 lbs.	**BEH**
HER4	4	Dee	10¼" x 13"	53 lbs.	**BEH**

SQUARE POINT—LONG HANDLE



Improved pattern hollow back shovels with perfect lift and balance. Carbon steel blades. Heat treated. Black finish. Polished sockets. Clear lacquered ash handles 47" long. 6 in bundle.

No.	Size	Handle	Blade	Wt. Doz.	Repair Handle
HELS	2	Long	9¾" x 11½"	52 lbs.	**B48H**
HELS4	4	Long	10¾" x 13"	58 lbs.	**B48H**

SQUARE POINT—D HANDLE

Improved pattern hollow back shovels with perfect lift and balance. Carbon steel blades. Heat treated. Black finish. Polished sockets. Clear lacquered 27" ash handles fitted with Sturd-E D. 6 in bundle.

No.	Size	Handle	Blade	Wt. Doz.	Repair Handle
HES	2	Dee	9¾" x 11½"	52 lbs.	**BEH**
HES4	4	Dee	10¾" x 13"	58 lbs.	**BEH**

Hollow Back Shovels derive their name from the frog, or ridge, stamped into the center of the blade for reinforcement or strength. The rolled shoulders on dirt shovels add strength to the blade and provide a smooth edge for foot rest. Improved design with heat treated blades and polished sockets. Attractive blade stamp and two-color handle imprint.

Hollow Back Shovels cannot compare with the outstanding features of the Taper Forged construction in Dynalite, Bantam, Fox and Bull Dog shovels.

TRUE TEMPER — "A" GRADE SHOVELS

ROUND POINT—LONG HANDLE



Finest quality hollow back shovels. Improved design. Heat treated carbon steel blades. Black finish. Polished sockets. Select, fire hardened ash handles, 47" long knob-end. 6 in bundle.

No.	Size	Handle	Blade	Wt. Doz.	Repair Handle
HTLR	2	Long	9¾" x 12"	48 lbs.	**T48H**
HTLR4	4	Long	10¼" x 13"	54 lbs.	**T48H**

ROUND POINT—D HANDLE

Finest quality hollow back shovels. Improved design. Heat treated carbon steel blades. Black finish. Polished sockets. Select, 27" fire hardened ash handles fitted with Sturd-E D. 6 in bundle.

No.	Size	Handle	Blade	Wt. Doz.	Repair Handle
HTR	2	Dee	9⅜" x 12"	47 lbs.	**TEH**
HTR4	4	Dee	10¼" x 13"	53 lbs.	**TEH**

SQUARE POINT—LONG HANDLE



Finest quality hollow back shovels. Improved design. Heat treated carbon steel blades. Black finish. Polished sockets. Select, fire hardened ash handles, 47" long knob-end. 6 in bundle.

No.	Size	Handle	Blade	Wt. Doz.	Repair Handle
HTLS	2	Long	9¾" x 11½"	52 lbs.	**T48H**
HTLS4	4	Long	10¾" x 13"	58 lbs.	**T48H**

SQUARE POINT—D HANDLE

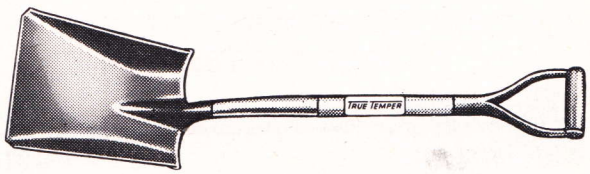

Finest quality hollow back shovels. Improved design. Heat treated carbon steel blades. Black finish. Polished sockets. Select, 27" fire hardened ash handles fitted with Sturd-E D. 6 in bundle.

No.	Size	Handle	Blade	Wt. Doz.	Repair Handle
HTS	2	Dee	9¾" x 11½"	52 lbs.	**TEH**
HTS4	4	Dee	10¾" x 13"	58 lbs.	**TEH**

TRUE TEMPER Hollow Back Shovels

BRIAR EDGE IRRIGATING SHOVEL

ROUND POINT—LONG HANDLE



Improved design hollow back shovel. Spading lift makes it ideal for irrigating and spading uses. Carbon steel blade. Heat treated. Black finish. Polished socket. Clear lacquered ash handle, 47" long. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
HELR-1	2	9⅜" x 12"	53 lbs.	**B48H**

BRIAR EDGE GARDEN SHOVEL

FOREST SERVICE PATTERN



General purpose home garden shovel. Improved design with perfect lift and balance. Carbon steel blade. Heat treated. Blade lift 5½". Black finish, polished socket. Rolled shoulders. Fitted with 40" clear lacquered ash handle. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
HLO	0	8" x 10"	48 lbs.	**B40H**

For 48" long knob-end handle add suffix "L".

ORE, SAND OR ASPHALT SHOVELS

CONNEAUT SPECIAL—D HANDLE

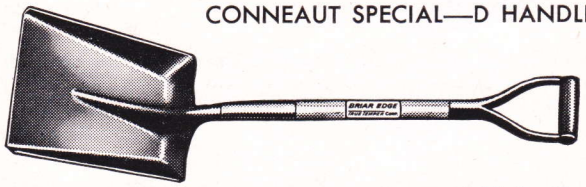

Hollow back. Mikola pattern. 14 gauge carbon steel blade. Size 4 blade. Heat treated. Black finish. Polished socket. Fire hardened ash handle 27" with Sturd-E steel D. 6 in bundle.

With Drop Point	Without Drop Point	Blade	Wt. Doz.	Repair Handle
COSD	**COS**	11" x 12½"	66 lbs.	**TEH**

CONNEAUT SPECIAL—LONG HANDLE

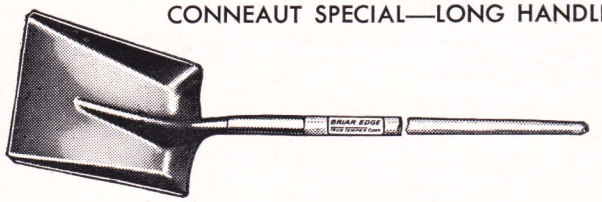

Hollow back. Mikola pattern. 14 gauge carbon steel blade. Heat treated. Black finish. Polished socket. Fire hardened ash handle, length 51". 6 in bundle.

With Drop Point	Without Drop Point	Blade	Wt. Doz.	Repair Handle
COSDL	**COSL**	11" x 12½"	66 lbs.	**T54H**

STRAP SOCKET NURSERY SPADE

TRUE TEMPER



Strap socket, welded plain back spade. 12 gauge carbon steel blade with riveted step. Heat treated. Black finish. Square point. 18½" straps. Blade 7¼" x 13". Finest quality ash handle. Fitted with 27" Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
NCS	2	7¼" x 13"	82 lbs.	**TES**

BRIAR EDGE GARDEN SPADES

WITH STURD-E DEE



Hollow back spade. Carbon steel blade. Heat treated. Black finish. Polished socket. Clear lacquered ash handle. 6 in bundle.

No.	Handle	Blade	Wt. Doz.	Repair Handle
SH	Dee	7" x 12"	50 lbs.	**BEH**

WITH LONG HANDLE



Hollow back spade. Carbon steel blade. Heat treated. Black finish. Polished socket. Clear lacquered ash handle. 6 in bundle.

No.	Handle	Blade	Wt. Doz.	Repair Handle
SHL	47" Long	7" x 12"	50 lbs.	**B48H**

STREET COMMISSIONER'S SHOVELS

TRUE TEMPER

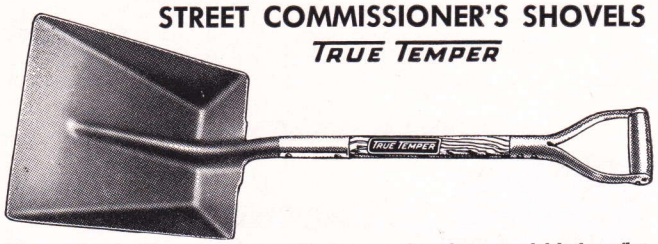

Hollow back, Magyar pattern. Heat treated carbon steel blades, flat back. Black finish, polished sockets. Finest quality, fire hardened ash 27" handles fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
SCT2	2	14" x 14¾"	65 lbs.	**TEH**
SCT4	4	14½" x 15½"	70 lbs.	**TEH**

For 51" long knob-end handles add suffix "L".

'FLINT EDGE'

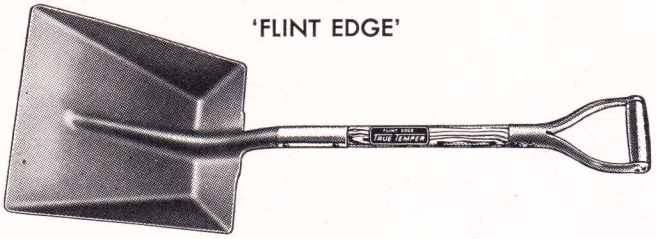

Hollow back, Magyar pattern. Heat treated carbon steel blades, flat back. Black finish, polished sockets. High quality, fire hardened ash 27" handles fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
SCF2	2	14" x 14¾"	65 lbs.	**TEH**
SCF4	4	14½" x 15½"	70 lbs.	**TEH**

For 51" long knob-end handles add suffix "L".

'BRIAR EDGE'

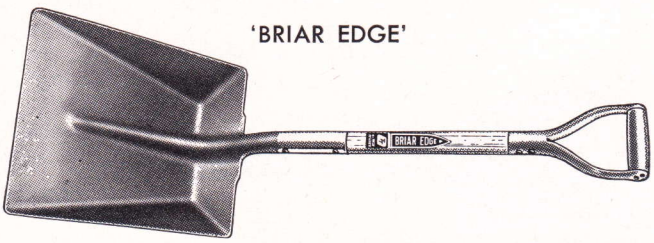

Hollow back, Magyar pattern. High carbon steel blades, flat back. Black finish, polished sockets. Good quality, 27" clear lacquered ash handles, fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
SCB2	2	14" x 14¾"	65 lbs.	**BEH**
SCB4	4	14½" x 15½"	70 lbs.	**BEH**

For 51" long knob-end handles add suffix "L".

TRUE TEMPER Hollow Back Scoops

WESTERN PATTERN STEEL SCOOPS

TRUE TEMPER

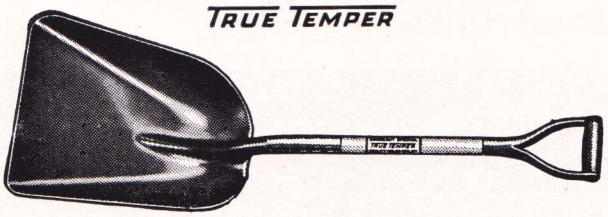

16 gauge blades. Heat treated. Wide mouth. Black finish. Polished sockets. Finest quality ash handles, fire hardened. Length 27". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
WT8	8	14¼" x 17"	81 lbs.	**TEH**
WT10	10	14¾" x 18"	88 lbs.	**TEH**
WT12	12	15" x 19"	91 lbs.	**TEH**

For 51" long knob-end handles add suffix "L".

'FLINT EDGE'

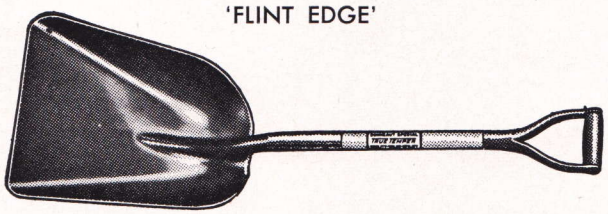

16 gauge blades. Heat treated. Wide mouth. Black finish. Polished sockets. High quality ash handles, fire hardened. Length 27". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
WF8	8	14¼" x 17"	81 lbs.	**TEH**
WF10	10	14¾" x 18"	88 lbs.	**TEH**
WF12	12	15" x 19"	91 lbs.	**TEH**

For 51" long knob-end handles add suffix "L".

'BRIAR EDGE'

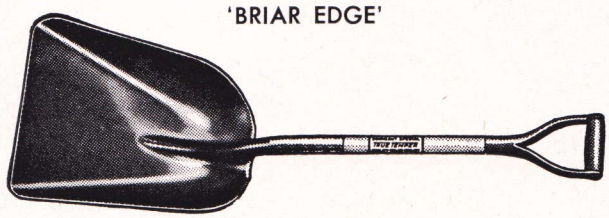

16 gauge blades. High carbon steel. Wide mouth. Black finish. Polished sockets. Clear lacquered ash handles. Length 27". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
WB8	8	14¼" x 17"	81 lbs.	**BEH**
WB10	10	14¾" x 18"	88 lbs.	**BEH**
WB12	12	15" x 19"	91 lbs.	**BEH**

For 51" long knob-end handles add suffix "L".

EASTERN PATTERN STEEL SCOOPS

TRUE TEMPER



16 gauge blades. Heat treated. Narrow mouth. Black finish. Polished sockets. Finest quality ash handles, fire hardened. Length 27". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
ET2	2	11¾" x 14¾"	63 lbs.	**TEH**
ET4	4	12¼" x 15¾"	69 lbs.	**TEH**
ET6	6	12¾" x 16¾"	75 lbs.	**TEH**

For 51" long knob-end handles add suffix "L".

'FLINT EDGE'



16 gauge blades. Heat treated. Narrow mouth. Black finish. Polished sockets. High quality ash handles, fire hardened. Length 27". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
EF2	2	11¾" x 14¾"	63 lbs.	**TEH**
EF4	4	12¼" x 15¾"	69 lbs.	**TEH**
EF6	6	12¾" x 16¾"	75 lbs.	**TEH**

For 51" long knob-end handles add suffix "L".

'BRIAR EDGE'

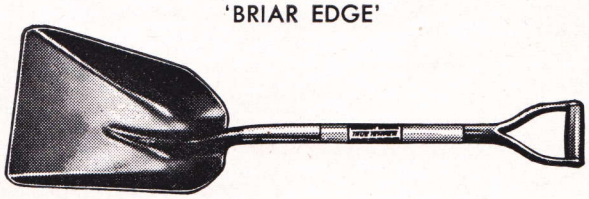

16 gauge blades. High carbon steel. Narrow mouth. Black finish. Polished sockets. Clear lacquered ash handles. Length 27". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
EB2	2	11¾" x 14¾"	63 lbs.	**BEH**
EB4	4	12¼" x 15¾"	69 lbs.	**BEH**
EB6	6	12¾" x 16¾"	75 lbs.	**BEH**

For 51" long knob-end handles add suffix "L".

WESTERN PATTERN ALUMINUM SCOOPS

TRUE TEMPER

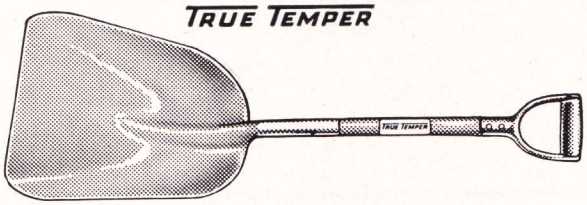

Extra light weight. Rustproof. 10 gauge aluminum alloy blade. Heat treated for strength. Aluminum True Temper Dee. Non-corrosive . . . non-sparking . . . acid resisting. Polished socket. Finest quality ash handle, fire hardened. Length 27". 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
AW8	8	14¼" x 17"	48 lbs.	**TAH**

For 51" long knob-end handles add suffix "L".

EASTERN PATTERN ALUMINUM SCOOPS

TRUE TEMPER



Extra light weight. Rustproof. 10 gauge aluminum alloy blade. Heat treated for strength. Aluminum True Temper Dee. Non-corrosive . . . non-sparking . . . acid resisting. Polished socket. Finest quality ash handle, fire hardened. Length 27". 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
AE2	2	11¾" x 14¾"	42 lbs.	**TAH**
AE4	4	12¼" x 15¾"	44 lbs.	**TAH**
AE6	6	12¾" x 16¾"	46 lbs.	**TAH**

For 51" long knob-end handles add suffix "L".

TRUE TEMPER

TRU-LITE ALUMINUM SCOOP

20% Stronger - 20% more Wear-Resistant

TRU-LITE Grain Scoops are made of a new Alcoa Aluminum Alloy which is, gauge for gauge, 20% stronger and 20% more wear-resistant than the aluminum previously used. Further, they are lighter and have greater bowl capacity than other aluminum scoops of comparable size.

Blade, "D" handle and all rivets are nonsparking aluminum. Completely nonrusting, noncorrosive and acid resisting. Heat-treated blade is ribbed for extra strength, protected by aluminum lacquer.

Northern white Ash handle, 27" long, is fire-hardened to provide a hard, splinter-free surface that resists weather and wear.

Reshaped bowl has greater capacity. Extra depth, no increase in weight. Over-all design assures proper hang, best possible balance, maximum efficiency in use.

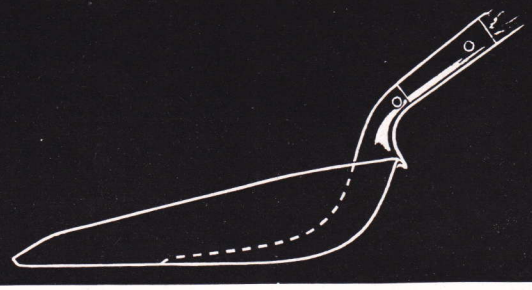

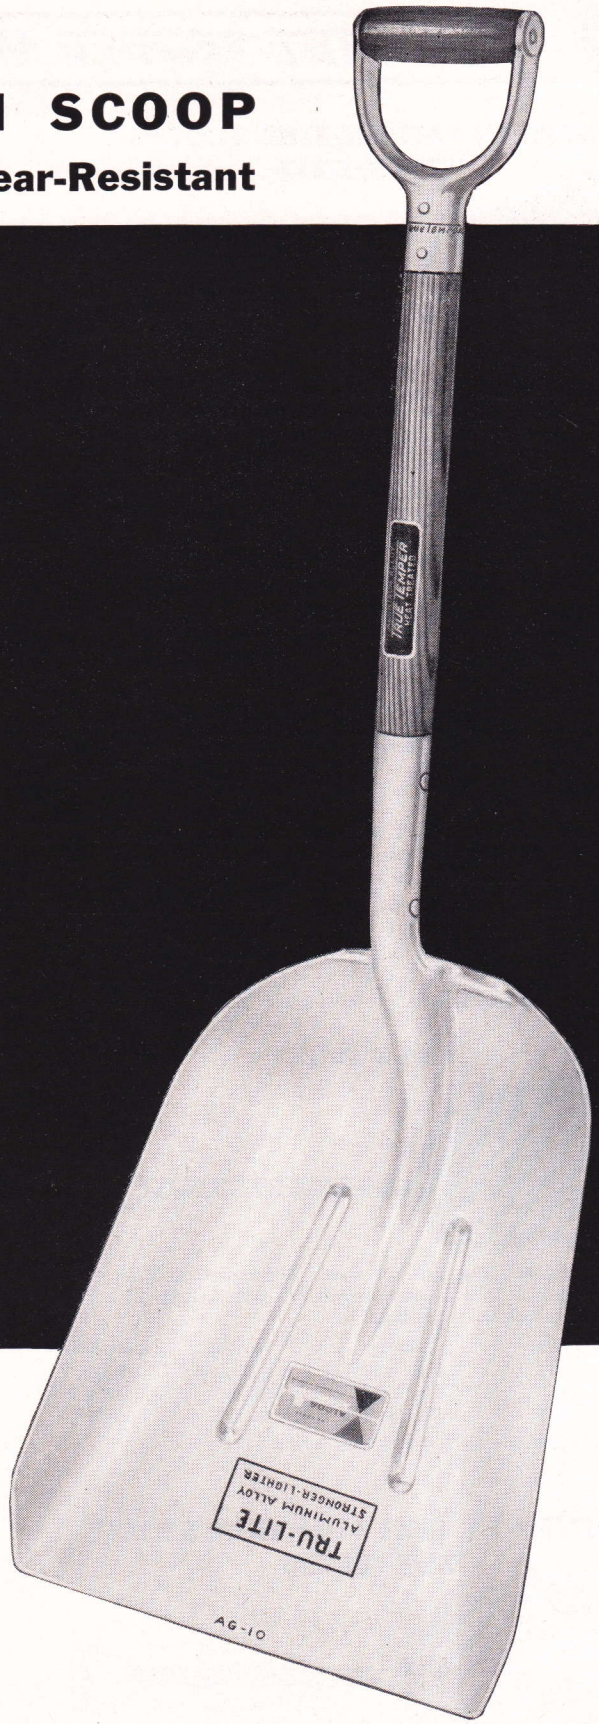

ALUMINUM GRAIN SCOOPS

TRUE TEMPER 'TRU-LITE'

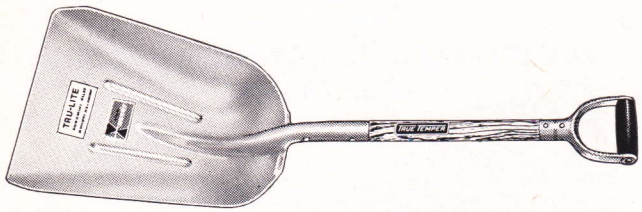

Tubular socket, hollow back pattern. New heat treated aluminum alloy blade, stronger and lighter, ribbed for extra strength, is protected by aluminum lacquer, a bright and eye appealing finish. Deep bowl shape for greater capacity. Polished socket. One-piece True Temper D aluminum top. Northern white ash handle, 27" long, is fire hardened to provide a hard, splinter-free surface that resists wear, weather and vermin. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
AG10	10	14¼" x 17"	48 lbs.	**TAH**
AG12	12	14½" x 18"	52 lbs.	**TAH**
AG14	14	15" x 19"	54 lbs.	**TAH**

For 51" long knob-end handle add suffix "L".

FOR GRAIN — CHOPPED HAY — SHRIMP SEED & FEED — COAL — SAWDUST CHEMICALS — CASTINGS — COKE COTTON SEED — CHOPPED ICE — PEANUTS FERTILIZER

TRUE TEMPER Hollow Back Scoops

WESTERN STEEL GRAIN SCOOPS

'FLINT EDGE'

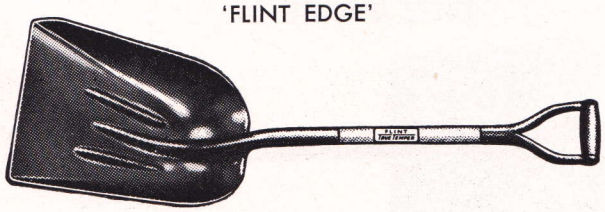

17 gauge steel blades. Heat treated. Ribbed for strength. Natural finish. Polished sockets. High quality ash handles, fire hardened. 27" Sturd-E steel D. 23" handle lifts. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
GF8	8	13½" x 16½"	68 lbs.	**TEH**
GF10	10	14" x 17½"	72 lbs.	**TEH**
GF12	12	14½" x 18½"	76 lbs.	**TEH**
GF14	14	15" x 19½"	80 lbs.	**TEH**

For 51" long knob-end handles add suffix "L".

'BRIAR EDGE'

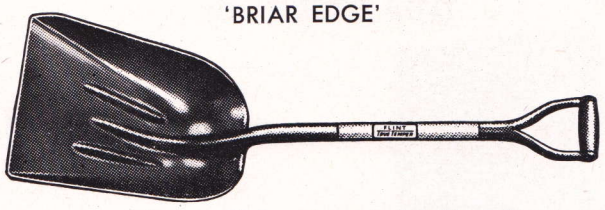

17 gauge steel blades. High carbon steel. Ribbed for strength. Natural finish. Polished sockets. Clear lacquered ash handles. 27" Sturd-E steel D. 23" handle lifts. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
GB8	8	13½" x 16½"	68 lbs.	**BEH**
GB10	10	14" x 17½"	72 lbs.	**BEH**
GB12	12	14½" x 18½"	76 lbs.	**BEH**
GB14	14	15" x 19½"	80 lbs.	**BEH**

For 51" long knob-end handles add suffix "L".

STEEL DAIRY TROUGH SCOOP

'BRIAR EDGE'

High carbon steel blade. Black finish. Polished socket. Handle lift 30", blade lift 6¼". Deep bowl. Designed especially for cleaning troughs in dairy barns. Perpendicular sides 4⅛" high at shoulder, 2½" at edge of blade. Clear lacquered ash handle 44½" long, knob-end. 6 in bundle.

No.	Blade	Wt. Doz.	Repair Handle
BTBL	10¼" x 15¼"	63 lbs.	**B48H**

ALUMINUM DAIRY TROUGH SCOOP

TRUE TEMPER



Extra lightweight. Rustproof. 10 gauge aluminum alloy blade. Heat treated. Handle lift 30", blade lift 6¼". Deep bowl. Designed especially for cleaning troughs in dairy barns. Perpendicular sides 4⅛" high at shoulder, 2½" at edge of blade. Polished socket. Fire hardened ash handle 44½" long knob-end. 6 in bundle.

No.	Blade	Wt. Doz.	Repair Handle
ABTL	10¼" x 15¼"	48 lbs.	**T48H**

ALUMINUM BARN SHOVEL

TRUE TEMPER

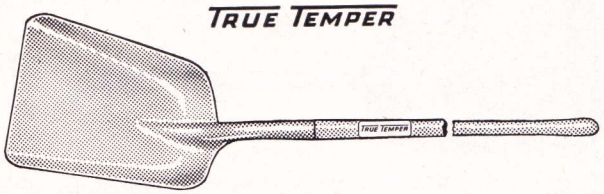

Extra lightweight. 10 gauge aluminum alloy blade. Non-corrosive, acid resisting, won't rust. Finest quality ash handle, fire hardened. 47" long knob-end. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
ABB	2	11½" x 14¾"	40 lbs.	**T48H**

STEEL BARN SHOVEL

'BRIAR EDGE'

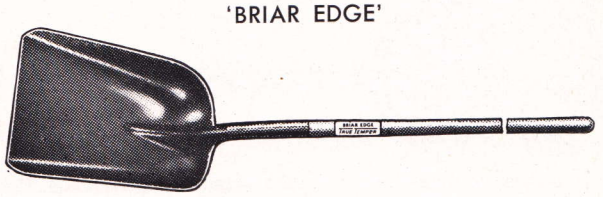

16 gauge carbon steel blade. Black finish. Polished socket. Size 2. Clear lacquered ash handle. 47" long knob-end. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
BB2	2	11½" x 14¾"	55 lbs.	**B48H**

TRUE TEMPER TELEGRAPH SHOVELS AND SPOONS

SHOVELS

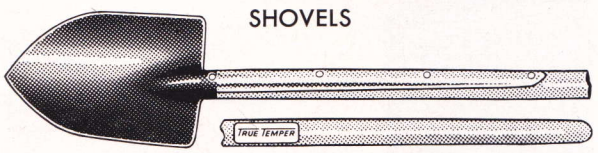

Plain back construction. Blade and strap made from finest grade, heavy 13 gauge steel. Heat treated. Blade 9" x 12". Straps 22" long. White hickory handles 1 15/16" diameter, marked every 12" for easy depth gauging. 6 in bundle.

No.	Length	Wt. Each	Repair Handle
TS6	6'	9 lbs.	**T6**
TS7	7'	10 lbs.	**T7**
TS8	8'	11 lbs.	**T8**
TS9	9'	12 lbs.	**T9**
TS10	10'	13 lbs.	**T10**
TS12	12'	15 lbs.	**T12**

SPOONS



Plain back construction. Blade and strap made from finest grade, heavy 13 gauge steel. Heat treated. Straps 22" long. White hickory handles 1 15/16" diameter, marked every 12" for easy depth gauging. 6 in bundle.

Eastern Pattern Blade 9½" x 10½"	Western Pattern Blade 8½" x 9¾"	Length	Wt. Each	Repair Handle
EP6	**WP6**	6'	9 lbs.	**T6**
EP7	**WP7**	7'	10 lbs.	**T7**
EP8	**WP8**	8'	11 lbs.	**T8**
EP9	**WP9**	9'	12 lbs.	**T9**
EP10	**WP10**	10'	13 lbs.	**T10**
EP12	**WP12**	12'	15 lbs.	**T12**

TRUE TEMPER Hollow Back Coal Scoops

STEEL COAL YARD SCOOPS

TRUE TEMPER

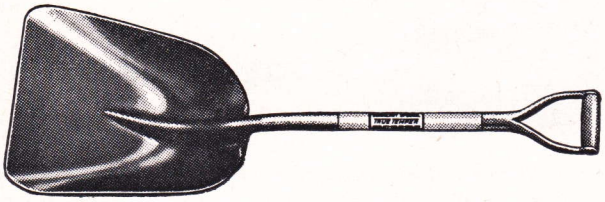

Heat treated 16 gauge steel blade. Wide mouth. Flat point. Black finish. Polished socket. Finest quality ash handle, fire hardened. Length 27". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
CYT8	8	14½" x 17"	81 lbs.	**TEH**

'FLINT EDGE'

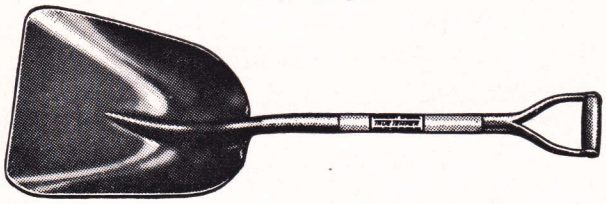

Heat treated 16 gauge steel blade. Wide mouth. Flat point. Black finish. Polished socket. Fire hardened ash handle. Length 27". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
CYF8	8	14½" x 17"	81 lbs.	**TEH**

ALUMINUM COAL YARD SCOOP

TRUE TEMPER

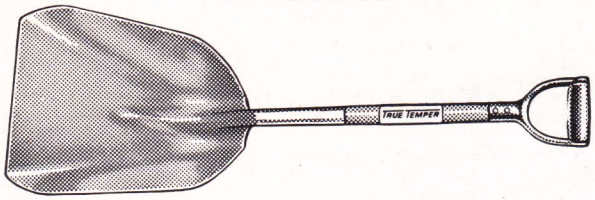

Extra lightweight. Rustproof. 10 gauge aluminum alloy blade. Heat treated for strength. Aluminum True Temper Dee. Non-corrosive . . . non-sparking . . . acid resisting. Polished socket. Fire hardened northern ash handle. Length 27". 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
ACY8	8	14½" x 17"	47 lbs.	**TAH**

ALUMINUM COAL SHOVEL

TRUE TEMPER

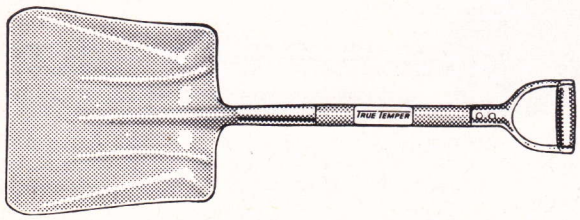

Extra lightweight. Rustproof 10 gauge aluminum alloy blade. Heat treated and ribbed for strength. Aluminum True Temper Dee. Non-corrosive . . . non-sparking . . . acid resisting. Polished socket. Northern ash handle, fire hardened. Length 27". 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
AC4	4	14¼" x 15½"	47 lbs.	**TAH**

For long knob-end handle add suffix "L".

STEEL COAL SHOVELS

TRUE TEMPER BULL DOG

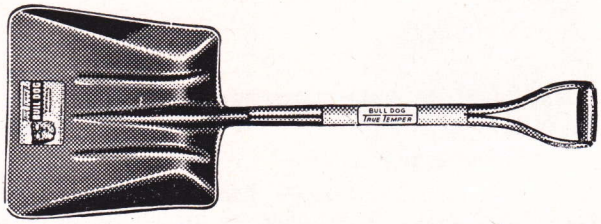

17 gauge heat treated alloy steel blade. Ribbed. Black finish. Polished socket. Finest quality ash handles, clear lacquered. Length 27" with wood split D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
CA2	2	13¼" x 14½"	60 lbs.	**TSH**
CA4	4	14¼" x 15½"	66 lbs.	**TSH**

For long knob-end handles add suffix "L".

TRUE TEMPER FOX

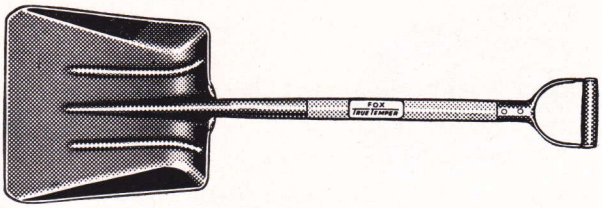

17 gauge heat treated carbon steel blade. Ribbed. Black finish. Polished socket. Finest quality fire hardened ash handles. Length 27" with True Temper steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
CT2	2	13¼" x 14½"	64 lbs.	**TTH**
CT4	4	14¼" x 15½"	76 lbs.	**TTH**

For long knob-end handles add suffix "L".

'FLINT EDGE'

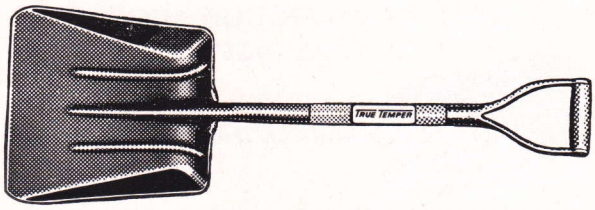

17 gauge heat treated carbon steel blades. Ribbed. Black finish. Polished sockets. Fire hardened ash handles. Length 27". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
CF2	2	13¼" x 14½"	64 lbs.	**TEH**
CF4	4	14¼" x 15½"	76 lbs.	**TEH**

For long knob-end handles add suffix "L".

'BRIAR EDGE'

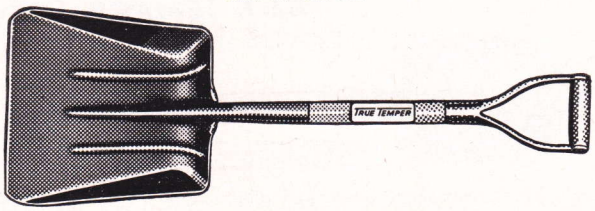

17 gauge high carbon steel blades. Ribbed. Black finish. Polished sockets. Clear lacquered ash handles. Length 27". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
CB2	2	13¼" x 14½"	64 lbs.	**BEH**
CB4	4	14¼" x 15½"	76 lbs.	**BEH**

For long knob-end handles add suffix "L".

NOTE—All steel coal shovels have 21" handle lift but can be furnished with lifts of 9, 11, 14, or 17 inches when specified on orders by adding lift heights as suffix.

TRUE TEMPER Hollow Back Scoops

SAND AND GRAVEL SCOOPS

TRUE TEMPER



16 gauge high carbon steel. Heat treated. Round bottom. Deep bowl. Turned steps. Black finish. Polished socket. Finest quality ash handle, fire hardened. Length 27". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
ST2	2	11" x 14¾"	61 lbs.	**TEH**

For long knob-end handle add suffix "L".

'FLINT EDGE'

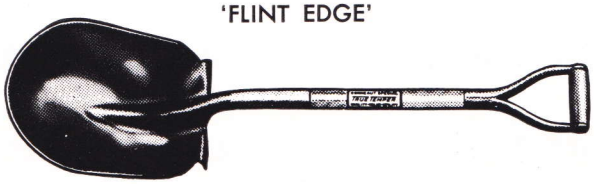

16 gauge high carbon steel. Heat treated. Round bottom. Deep bowl. Turned steps. Black finish. Polished socket. High quality ash handle, fire hardened. Length 27". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
SF2	2	11" x 14¾"	61 lbs.	**TEH**

For long knob-end handle add suffix "L".

'BRIAR EDGE'



16 gauge high carbon steel. Round bottom. Deep bowl. Turned steps. Black finish. Polished socket. Good quality ash handle, natural finish. Length 27". Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
SB2	2	11" x 14¾"	61 lbs.	**BEH**

For long knob-end handle add suffix "L".

BREAKDOWN SCOOPS

TRUE TEMPER



15 gauge high carbon steel blade. Diamond point. Heat treated. Turned steps. Black finish. Polished sockets. Fire hardened ash handle 27" with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
BDT5	5	11¾" x 16"	72 lbs.	**TEH**

For long knob-end handle add suffix "L".

'FLINT EDGE'



15 gauge high carbon steel blade. Diamond point. Heat treated. Turned steps. Black finish. Polished sockets. High quality fire hardened ash handle 27" with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
BDF5	5	11¾" x 16"	72 lbs.	**TEH**

For long knob-end handle add suffix "L".

FURNACE AND CHARGING SCOOPS

'FLINT EDGE'

Low lift. 16 gauge steel blade. Heat treated. Black finish. Polished socket. Fire hardened ash handle. Length 30". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
FF	2	10¼" x 15½"	60 lbs.	**TEH32**

'BRIAR EDGE'

Low lift. 16 gauge high carbon steel blade. Black finish. Polished socket. Clear lacquered ash handle. Length 30". Fitted with Sturd-E steel D. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
FB	2	10¼" x 15½"	60 lbs.	**BEH32**

LOW LIFT ASHPIT SCOOP

'BRIAR EDGE'

Low lift. 16 gauge high carbon steel blade. Black finish. Polished socket. Clear lacquered ash handle. Length 72" long knob-end. 6 in bundle.

No.	Blade	Wt. Doz.	Repair Handle
APB4	11¾" x 16"	72 lbs.	**B72H**

Also furnished with 8', 10' or 12' handles at extra charge.

COAL MINERS' BUG DUST SCOOP

'FLINT EDGE'

16 gauge high carbon steel blade. Low sided wide blade, ribbed for strength. Black finish. Polished socket. Fire hardened ash handle 6 ft. long. Straight or flat lift makes it possible to use where overhead clearance is limited. 6 in bundle.

No.	Size	Blade	Wt. Doz.	Repair Handle
CDF	4	14¾" x 16¼"	78 lbs.	**T72HBD**

Also furnished with 7', 8', 9' or 10' handles at extra charge.

TRUE TEMPER® DISPLAY STANDS

Field tested • Quality built

- Proven sales builders, now at work in thousands of stores.
- Scientifically designed. Show maximum amount of merchandise in minimum space.
- Display merchandise to best advantage.
- Invite customers to select right from the stand.
- Sold at ***less than cost*** in return for their advertising value to True Temper.
- Attractive, sturdy, long-lasting. Heavy-gauge steel with bright finishes.

GARDEN TOOL STAND DISPLAYS OVER 50 TOOLS IN 6 SQUARE FT.!

This new Garden Center displayer holds a complete popular selection of long-handle and short-handle tools, shears and pruners, and other gardening supplies. Make it your complete garden tool department. This is the modern island-type stand which fits any interior display without obstructing the view. Mounted on four extra-large casters so you can easily roll it anywhere in the store, or for outside display. Tools are shown in the modern **safe** way with heads down, so that customers can remove tools from the display without danger.

Construction is all heavy-gauge steel — rigidly braced and bolted. Painted a dark rich green with bright yellow letters. Ideal for small or large stores. Shipped unassembled with complete instructions. Dimensions: 46" long, 18" wide, 41" high.

No. M — Wt. each 35 lbs. **Price each: $15.00**

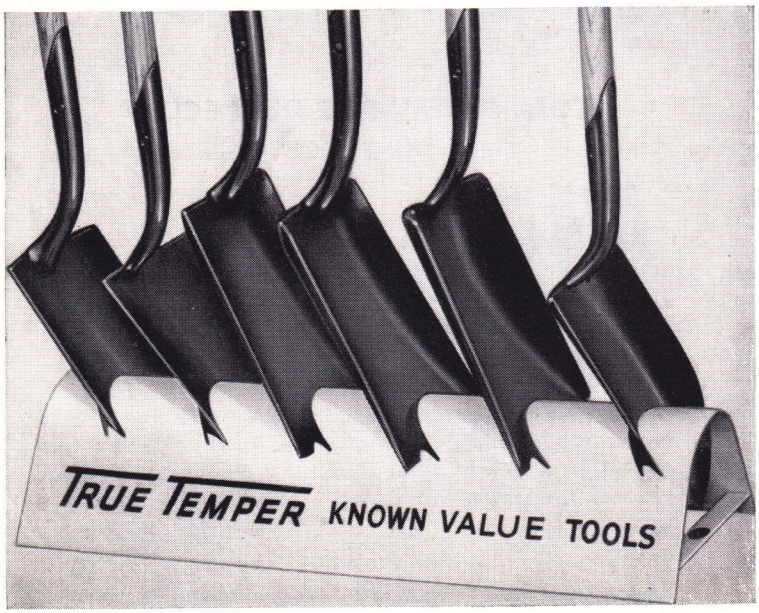

STEEL RACK AT ONLY $2.50 HOLDS 6 SHOVELS, SPADES

This bright yellow, simplified stand displays six shovels and spades in a natural position—invites customer inspection. Firmly holds six True Temper shovels, spades or scoops of any pattern. Eliminates clutter, reminds customers of their needs. Shows off the best shovel and spade features.

Made from sturdy steel plate, this displayer comes completely assembled—ready to sell shovels and spades right off your floor. Only 30" long, 12" wide at base.

No. SDS — Wt. each 8 lbs. **Price each: $2.50**